
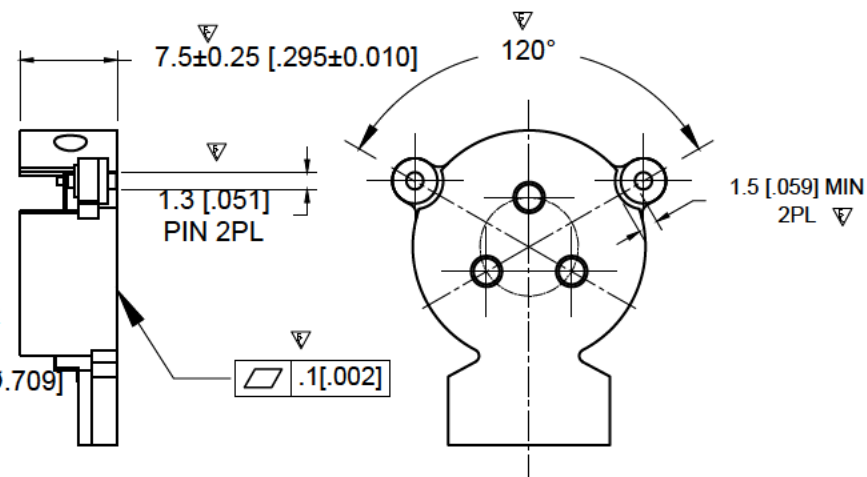
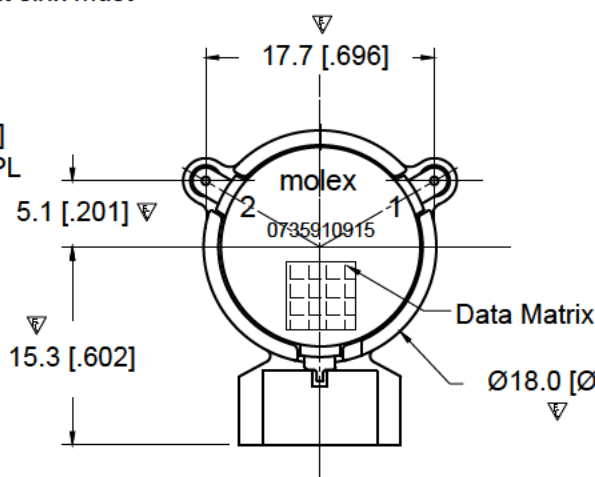


RECOMMENDED LAND PATTERN :

Zone A must be attached to heat sink. Thermal conductivity of intermediate layers between Zone A and heat sink must be better than 0.1 W / [°C x mm].

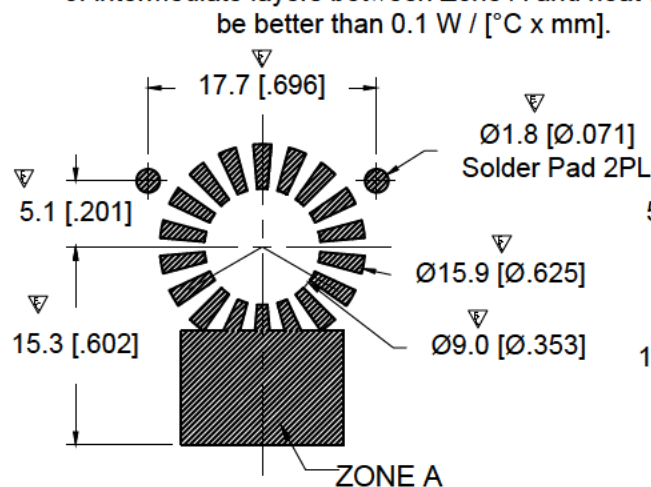

ELECTRICAL SPECIFICATION :

Frequency Range	: 2620 to 2690 MHz
Isolation	: 20dB Min
Insertion Loss	: 0.25 dB Max
FWD Power	: 100W (CW)
Peak Power	: 1000 W
REV Power	: 60 W
Return Loss	: 20 dB Min
IMD (2 x 30 W, 1 MHz space)	: -60dBc Max
Operating Temperature	: -40°C to +105°C
Storage Temperature	: -45°C to +115°C
Reflow Temperature	: 260°C with 10 seconds
Direction	: CCW

0.10
0.00

BODY: CARBON STEEL, SILVER PLATED
RIGID PINS: COPPER, SILVER PLATED

NOTES:

- 1.STANDARD INPUT/OUTPUT IMPEDANCE 50 Ohm
- 2.LEAD FREE, NO Nd MATERIAL, BeO FREE
- 3.DOES NOT DAMAGE AT 115°C
- 4.THE DIMENSION OF DATE MATRIX IS 5.3X5.3MM INFORMATION INCLUDING WORK ORDER NUMBER-SERIAL NUMBER-MATERIAL NUMBER
- 5.THIS PART COMPLIES WITH ALL RoHS REQUIRMENTS

ENG PART#: 811-262-269-WC194

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
0	mm
0	SCALE
0	1:1
0	GENERAL TOLERANCES (UNLESS SPECIFIED)
0	ANGULAR TOL ±1.5°
0	4 PLACES ± 0.005
0	3 PLACES ± 0.025
0	2 PLACES ± 0.13
0	1 PLACES ± 0.25
0	0 PLACES ± 0.40
0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS
0	THIRD ANGLE PROJECTION
0	DRAWING
0	B-SIZE
0	SER ES
0	073591
0	MATERIAL NUMBER
0	0735910915
0	CUSTOMER
0	Custom Part
0	SHEET NUMBER
0	1 OF 1

DOCUMENT STATUS	RELEASE DATE
-----------------	--------------