

## Ultra Low Phase Noise Amplifier 2 - 18 GHz

Rev. V1

### Features

- Wideband Performance
- Noise Figure: 4 dB @ 8 GHz
- Phase Noise: -154 dBc/Hz @ 1 kHz
- Bias Voltage: 5 V
- Bias Current: 60 mA
- 50  $\Omega$  Matched Input / Output
- Positive Voltage Only
- Die Size: 2.8 x 1.73 x 0.1 mm
- RoHS\* Compliant

### Description

The MAAL-011151-DIE is an easy to use, wideband low noise distributed amplifier die. It operates from 2 to 18 GHz and provides 17 dB of linear gain, 16 dBm of P1dB and 4 dB of noise figure at 8 GHz. The input and output are fully matched to 50  $\Omega$  with typical return loss >15 dB.

The RF input and RF output ports are DC blocked. Amplifier control is available through the use of a control circuit or by direct bias injection.


This product is fabricated using a low phase noise HBT process which features full passivation for enhanced reliability.

The MAAL-011151-DIE can be used as a low noise amplifier stage for signal generation applications. This device is ideally suited for Test and Measurement, EW, ECM, and Radar applications where ultra low phase noise and drive power is required.

### Ordering Information

Part Number	Package
MAAL-011151-DIE	gel pack

### Functional Schematic<sup>1</sup>

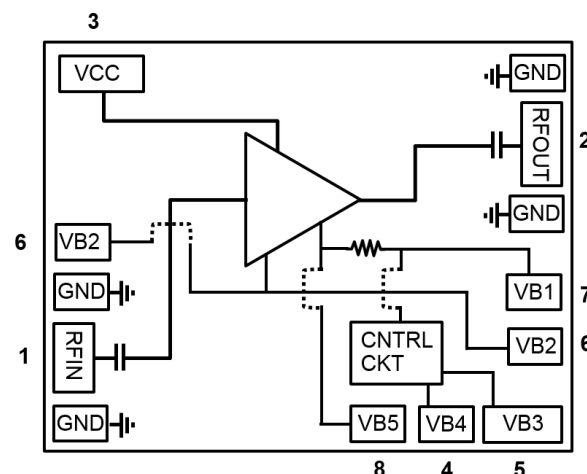

### Pin Configuration<sup>2</sup>

Pin #	Pin Name	Description
1	RFIN	RF Input
2	RFOUT	RF Output
3	VCC	Collector Voltage
4	VB4	Bias Voltage 4
5	VB3	Bias Voltage 3
6	VB2	Bias Voltage 2
7	VB1	Bias Voltage 1
8	VB5	Bias Voltage 5

1. Image not to scale.

2. Backside of die must be connected to RF, DC and thermal ground.

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

## Ultra Low Phase Noise Amplifier 2 - 18 GHz

Rev. V1

Electrical Specifications:  $T_A = +25^\circ\text{C}$ ,  $V_C = V_{CT}^3 = 5\text{ V}$ ,  $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	$P_{IN} = -15\text{ dBm}$ 2 GHz 10 GHz 18 GHz	dB	15.0 14.0 13.5	16.5 16.0 15.5	—
Output P3dB	2 GHz 10 GHz 18 GHz	dBm	—	23 19 14	—
Output Power <sup>4</sup>	$P_{IN} = +4.5\text{ dBm}$ , 2 GHz $P_{IN} = +2.8\text{ dBm}$ , 10 GHz $P_{IN} = -3.0\text{ dBm}$ , 18 GHz	dBm	18.0 15.0 9.0	20.0 17.5 11.5	—
Input Return Loss	$P_{IN} = -15\text{ dBm}$	dB	—	10	—
Output Return Loss	$P_{IN} = -15\text{ dBm}$	dB	—	10	—
Noise Figure	2 GHz 10 GHz 18 GHz	dB	—	8 5 8	—
Isolation	$P_{IN} = -15\text{ dBm}$ 2 GHz 10 GHz 18 GHz	dB	—	50 42 30	—
Phase Noise	$P_{IN} = +3\text{ dBm}$ , 12 GHz 100 Hz 1 kHz 10 kHz 1 MHz	dBc/Hz	—	-144 -150 -156 -162	—
IC	-15 dBm $P_{IN}$ , $V_C = 5\text{ V}$	mA	—	60	—
ICT <sup>3</sup>	Total current into R1, R2	mA	—	2	—

3. Reference detailed bias conditions on pages 3-4.

4. Output power is tested close to P1dB.

## Ultra Low Phase Noise Amplifier 2 - 18 GHz

Rev. V1

### Absolute Maximum Ratings<sup>5,6,7</sup>


Parameter	Absolute Maximum
Input Power	12 dBm
VCC	6 V
VB1, VB2, VB3, VB4, VB5	6 V
VB1, VB2, VB3, VB4, VB5 Current	5 mA
VCC Current	120 mA
Thermal Resistance	68°C/W
Storage Temperature	-65°C to +125°C
Operating Temperature	-40°C to +85°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.

6. MACOM does not recommend sustained operation near these survivability limits.

7. Operating at nominal conditions with junction temperature  $\leq +125^{\circ}\text{C}$  will ensure MTTF  $> 1 \times 10^6$  hours.

### Application Schematic

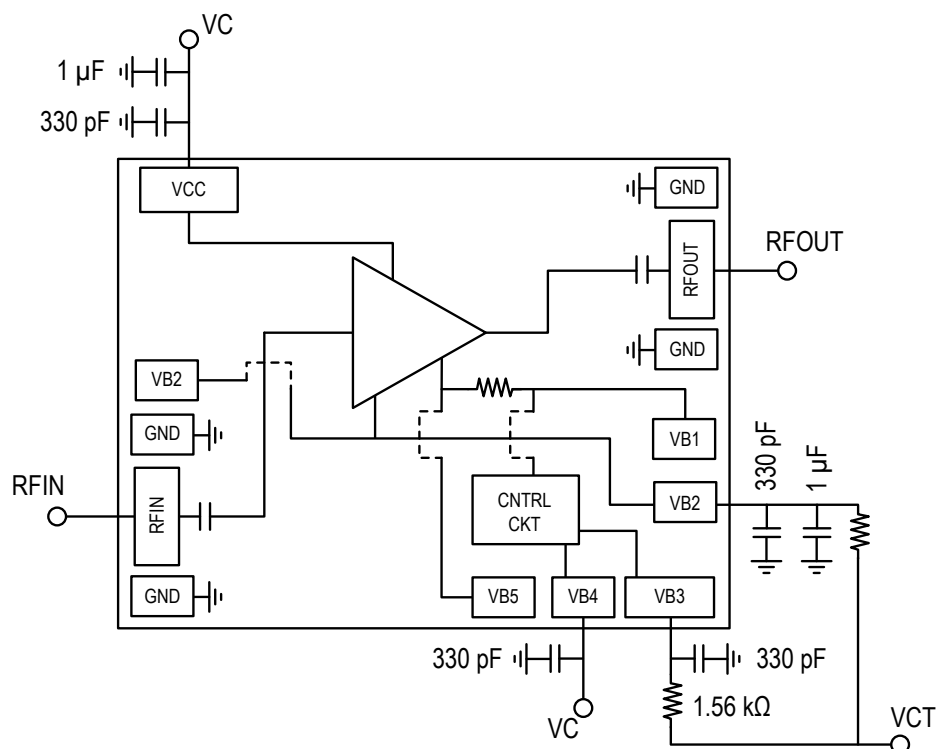


### Operating Conditions

Recommended biasing conditions are VC = 5 V applied to the VB4 and VCC pads. Apply 5 V to the amplifier control VCT node through the offset resistors to VB2 and VB3 pads according to the application schematic as shown. Applying VCT = 5 V will turn the LNA on, which should draw 60 mA from VC. Applying VCT = 0 V will turn off the LNA. The VCT will draw  $<2$  mA at 5 V. All DC supplies need to be low noise to prevent degradation of the amplifier phase noise.

### Recommended Bonding Diagram & PCB Layout

RF input and output port matching circuit patterns are designed to compensate for bonding wires. Input and output bonding configuration are identical.

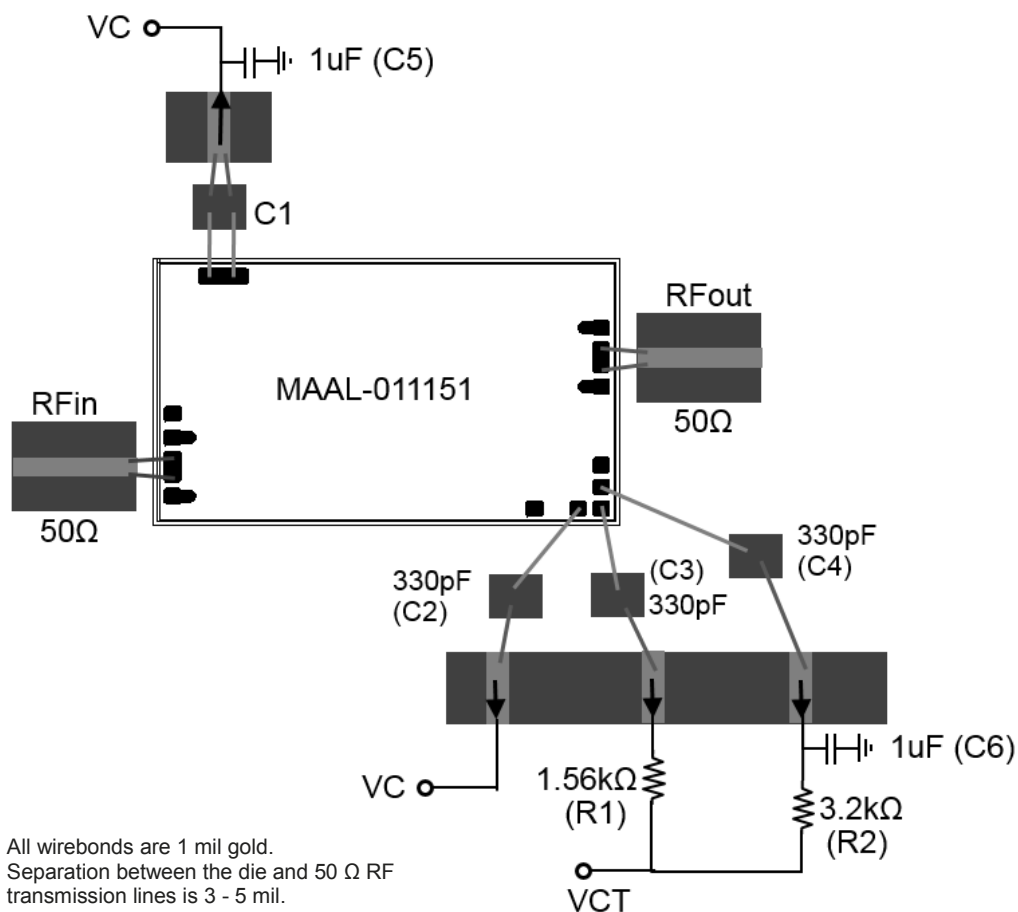

### Parts List


Part #	Value	Case Style
C1 - C4	330 pF	Single Layer
C5, C6	1 μF	0402
R1	1.56 kΩ	Thin film
R2	3.2 kΩ	Thin film

## Ultra Low Phase Noise Amplifier 2 - 18 GHz


Rev. V1

### Typical Performance Curves: 5 V, 60 mA


**Gain**

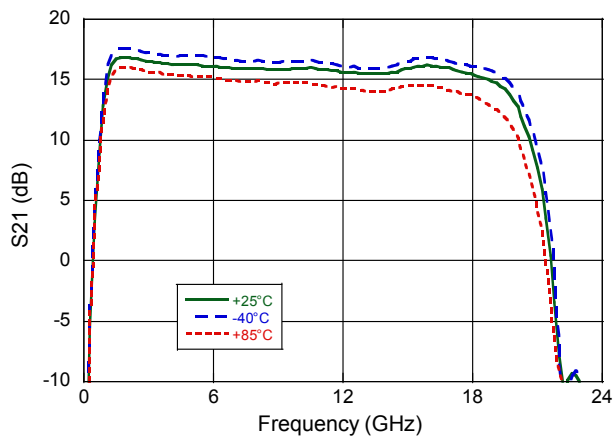


**Noise Figure**

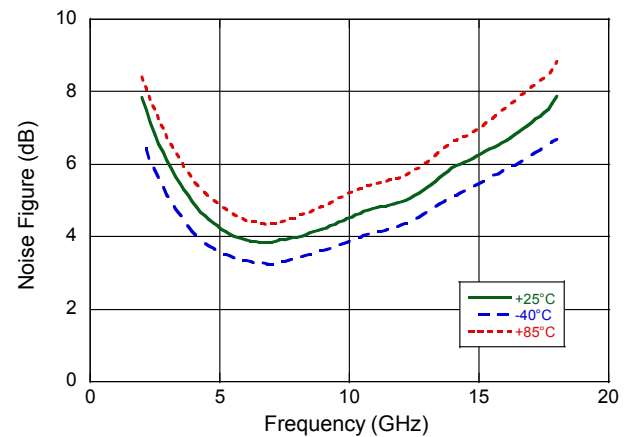


**Input Return loss**

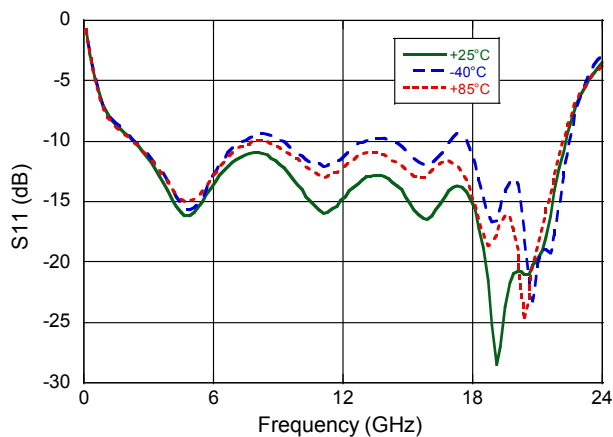



**Output Return Loss**

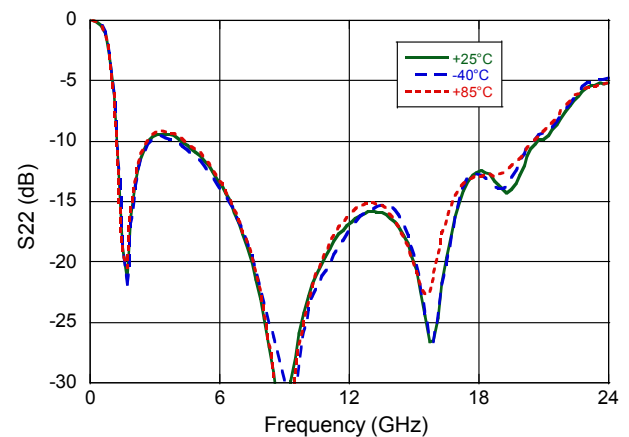



**Phase Noise @ +25°C**

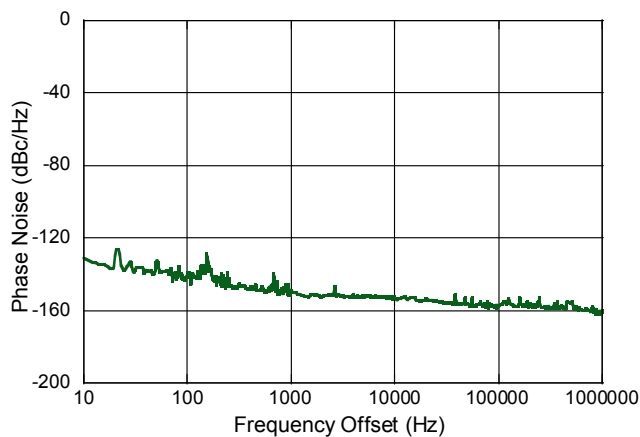


### Typical Performance Curves: P1dB @ 60 mA

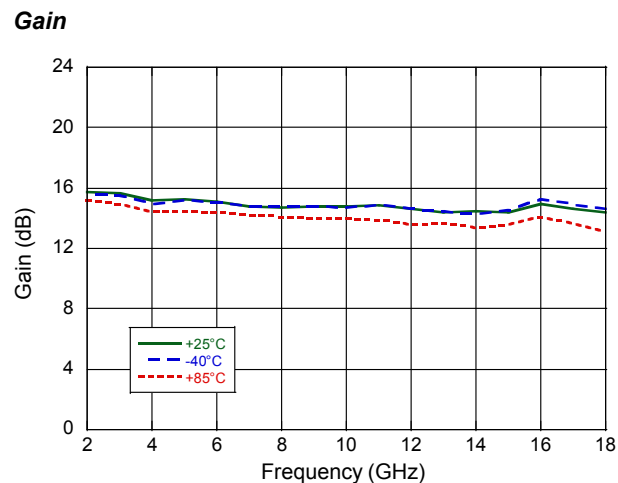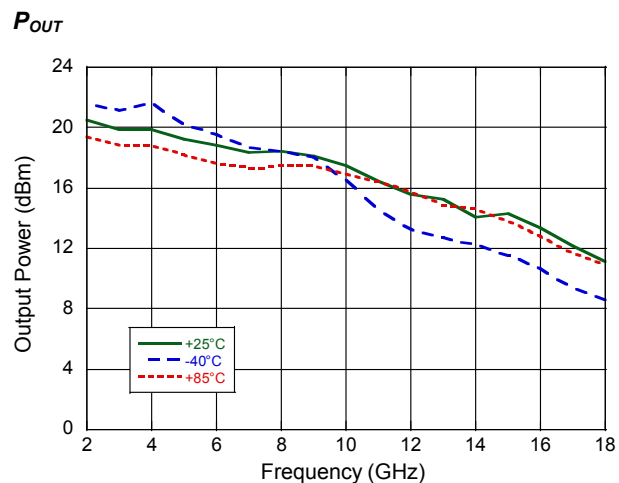

### Typical Performance Curves: P3dB @ 60 mA

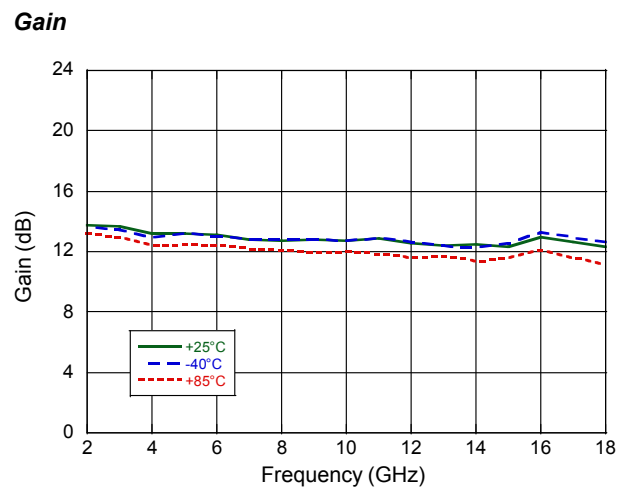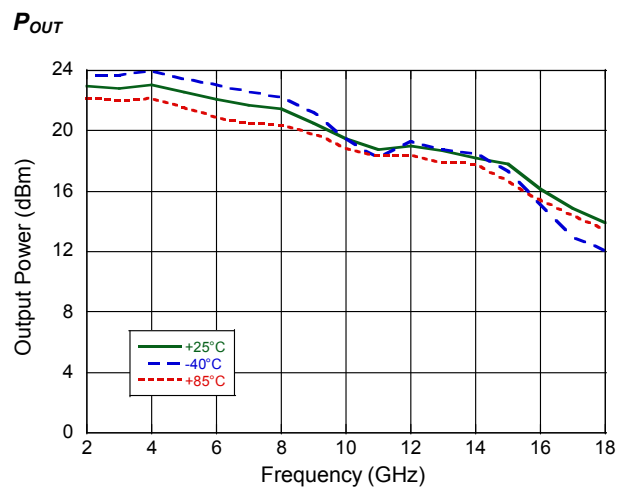

### MMIC Die Outline

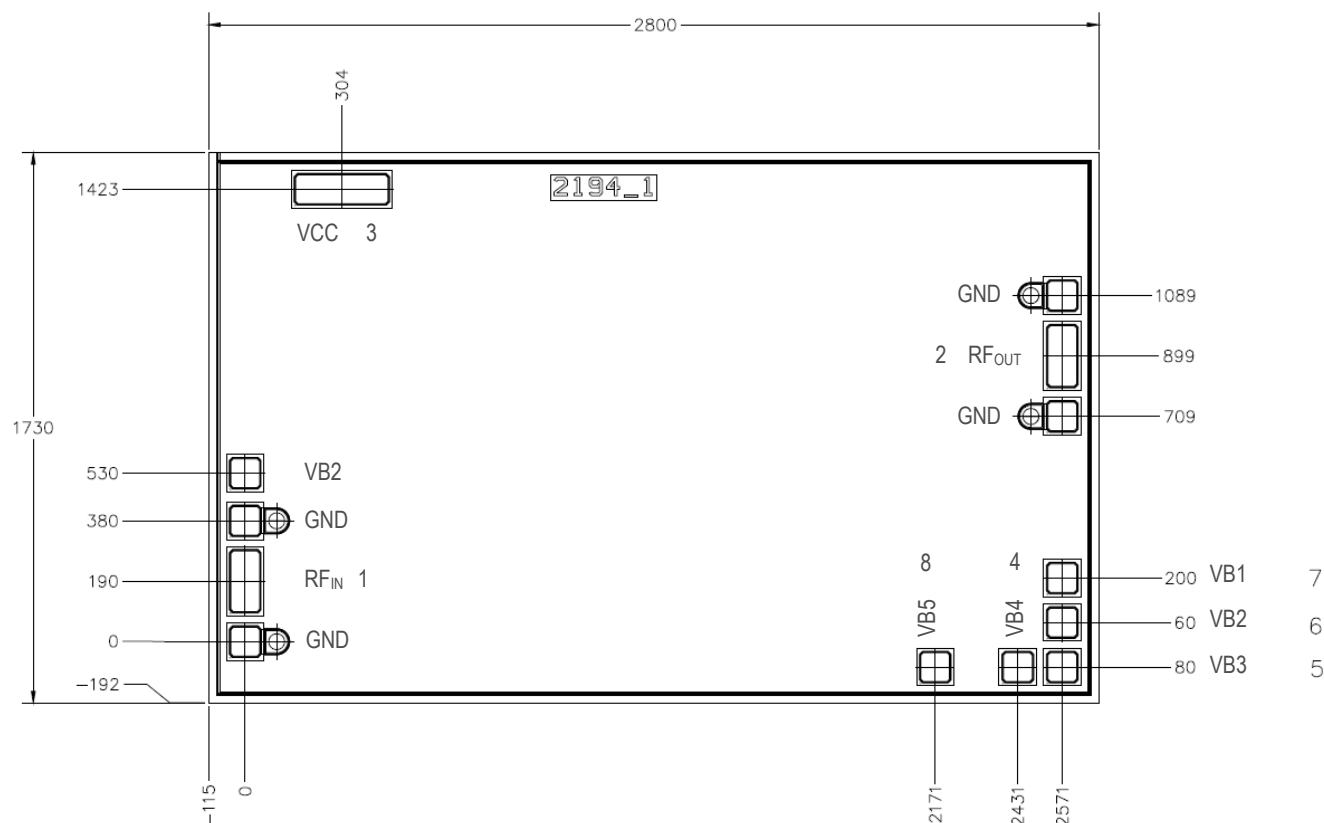

### Bond Pad Detail<sup>8,9</sup>

Pin #	Size (x)	Size (y)
1 - 2	100	200
3	300	100
4 - 8	100	100

8. All dimensions shown as microns ( $\mu\text{m}$ ) with a tolerance of  $\pm 5 \mu\text{m}$ , unless otherwise noted.

9. Die thickness is  $100 \mu\text{m} \pm 10 \mu\text{m}$ .

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1A devices.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.