


E-Series RF 1:1 Transformer 4.5 - 2000 MHz



Features

- Surface Mount
- 1:1 Impedance Ratio
- Available on Tape & Reel


SM-136 Package

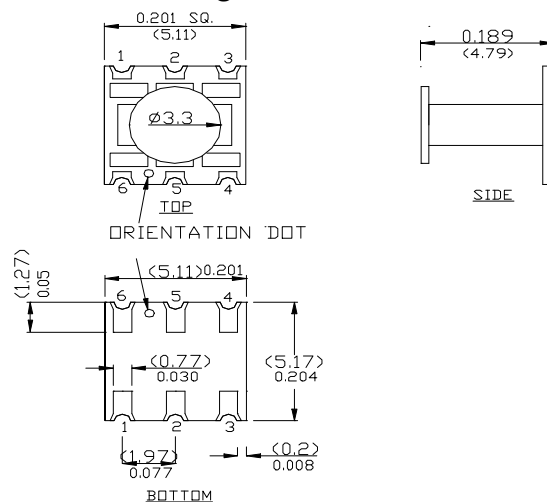

Description

M/A-COM's MABAES0018 is a 1:1 RF transformer in a low cost, surface mount package. Ideally suited for high volume applications.

Schematic

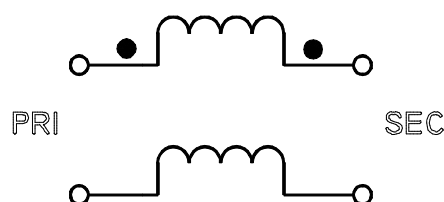

Electrical Specifications @25°C

Parameter	Units	Nominal	Maximum	Mean (x)	Sigma (σ)
Frequency Range 4.5 - 2000	MHz	—	—	—	—
Insertion Loss ($f_L - f_U$)					
4.5 - 400 MHz	dB	—	1.0	—	—
400-1500Mhz	dB	—	2.0	0.32	0.036
1500 - 2000 MHz	dB	—	3.5	—	—
Amplitude Unbalance					
4.5 - 1000 MHz	dB	—	1.0	—	—
Phase Unbalance					
4.5 - 1000 MHz	Degrees	—	20	—	—

Note: Mean and Sigma calculated from average loss at @ $(f_U - f_L)/2 + f_L$

Please Note that the photograph above indicates typical package only, not actual unit.



Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temperature	-40°C to +85°C

Functional Configuration


Function	Pin No.
Secondary Dot	1
Center Tap	-
Secondary	3
Primary	4
Not Connected	2,5
Primary Dot	6

Typical Performance @ +25°C


Insertion Loss 1

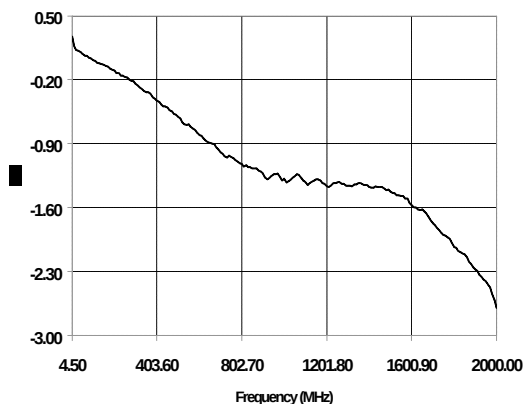


Insertion Loss 2

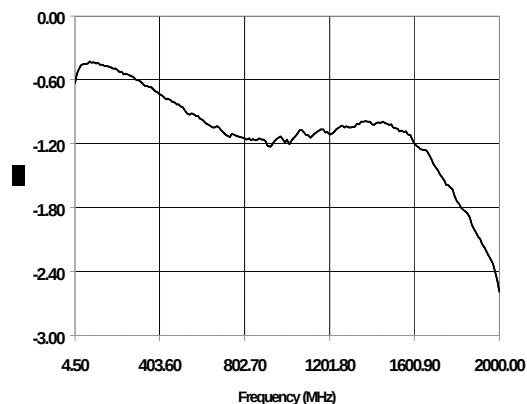

Amplitude Unbalance

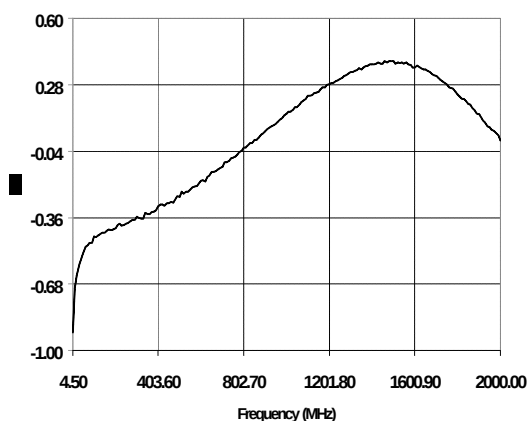

Phase Unbalance

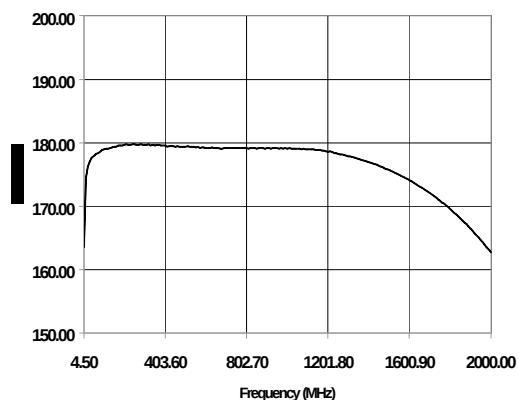

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.