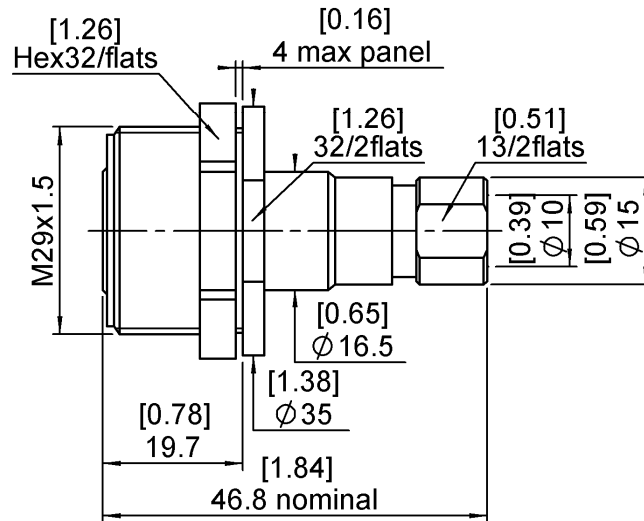


STR. BULK.JACK EZ FIT TYPE REAR MOUNT


R185A.315.200

CABLE 1/4" SUPERFLEXIBLE CORRUGATED

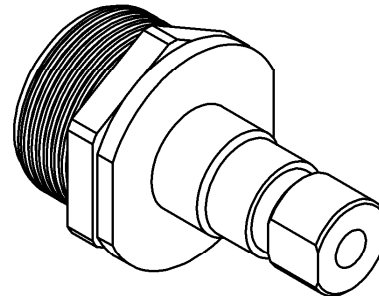
Series : ECO 7/16




PANEL CUT OUT



	mm	
	Maxi	mini
A	29.2	29.1



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	BBR
CENTER CONTACT	BRONZE	SILVER
OUTER CONTACT		
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR
-	-	-
-	-	-

Issue : 0926 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STR. BULK.JACK EZ FIT TYPE REAR MOUNT**R185A.315.200****CABLE 1/4" SUPERFLEXIBLE CORRUGATED**

Series : ECO 7/16

PACKAGING

Standard	Unit	Other
20	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-3	GHz
VSWR	1.10 + 0.000	x F(GHz) Maxi
Insertion loss	0.05	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	600	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	200	N mini
Axial force – Opposite end	100	N mini
Torque	NA	N.cm mini

Recommended torque		
Mating	NA	N.cm
Panel nut	3000	N.cm
Clamp nut	950	N.cm
A/F clamp nut	32.000	mm

Mating life	100	Cycles mini
Weight	131.400	g

ENVIRONMENTAL

Operating temperature	-40/+85	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	7.00	19.0	27.0	0.00	1.00	0.00

Assembly instruction :

Recommended cable(s)

FSJ1RN-50A - 1/4"

M2929Z

M2931Z

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	200	N mini
- torque	NA	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.010.030	STRIPPING TOOL	

OTHER CHARACTERISTICS

Watertightness:IP67

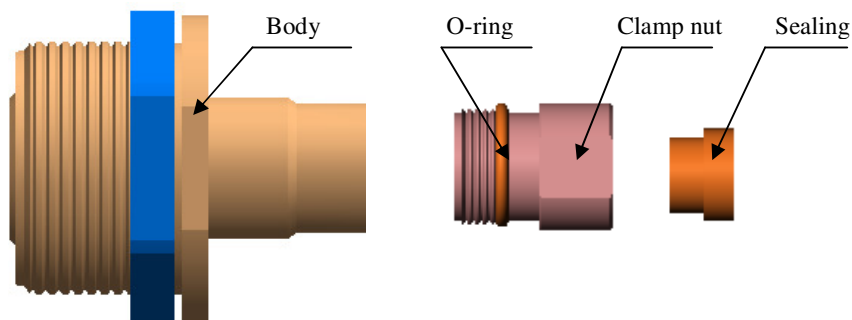
Issue : 0926 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

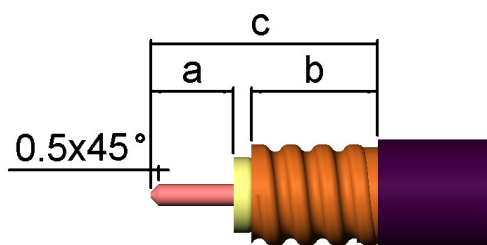


STR. BULK.JACK EZ FIT TYPE REAR MOUNT
R185A.315.200
CABLE 1/4" SUPERFLEXIBLE CORRUGATED

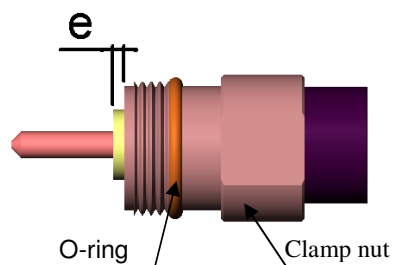
Series : ECO 7/16


1

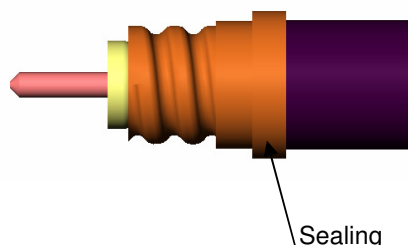
- Strip the cable .
- Do not damage the outer conductor .
- The end surface of inner conductor should be chamfered.
- Remove impurities such as copper scrap and burr on the end surface of the cable.


3

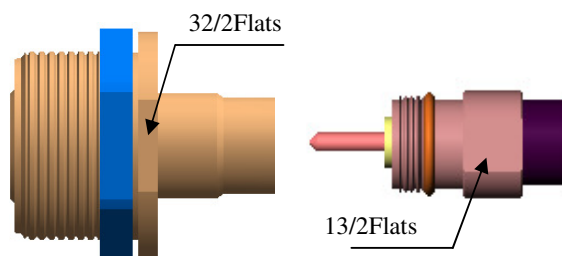
- Put the O-ring onto the clamp nut.
- Screw the clamp nut along the outer conductor of the cable, make sure dimension e after tightening.


2

- Screw the sealing part along the outer conductor of the cable.


4

- Screw the body onto the cable assembly .
- Recommended coupling torque : 950N.cm


Issue : 0926 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL