
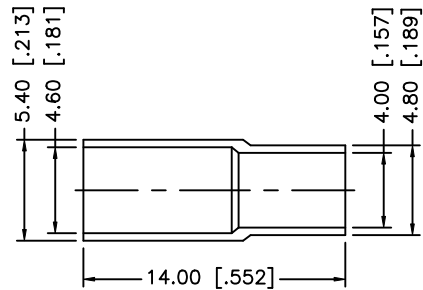


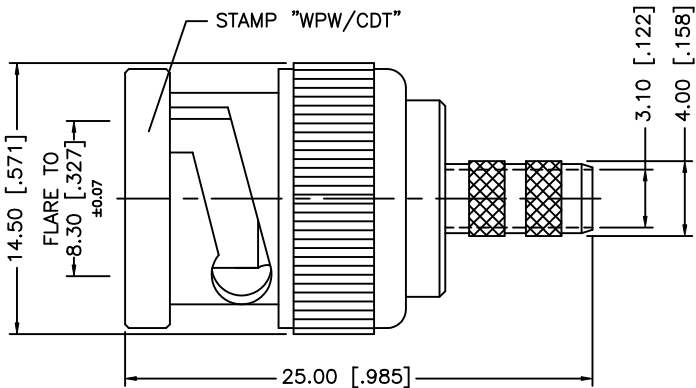


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/22/03	—	INITIAL RELEASE
A	05/18/05	—	CORRECT PART NO. AND DESCRIPTION
B	10/24/06	—	ADD "75 ohm" TO DESCRIPTION
C	10/27/08	—	REVISE NOTE 1 TO .178" HEX CRIMP

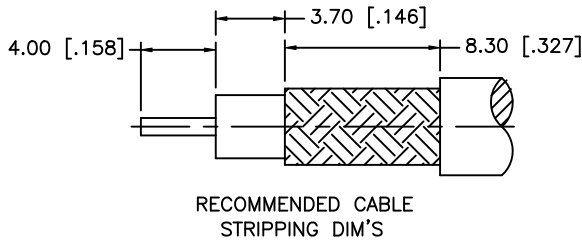

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
7						DRAWN		GRS							10/27/08		
6	FERRULE	COPPER	NICKEL	1		CHECKED											
5	SLEEVE	DELTRIN	NATURAL	1			ISSUED				PART DESCRIPTION		BNC CRIMP PLUG – 75ohm (FOR B573945, MINI MAX 500 CABLE)				
4	GASKET	RUBBER	RED	1			SHEET		1 OF 1								
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	PTFE	NATURAL	1							PART NO.		112556				
1	SHELL/BODY	BRASS	NICKEL	1			CAD FILE		C:/112/112556.DWG		DWG. NO.		112556.DWG		REV. C	SIZE A	SCALE NA
	DESCRIPTION	MATERIAL	FINISH	QTY													