



PAGE 1/2	ISSUE 1339	SERIES ADAPT-MES	PART NUMBER R191554000
----------	------------	------------------	------------------------

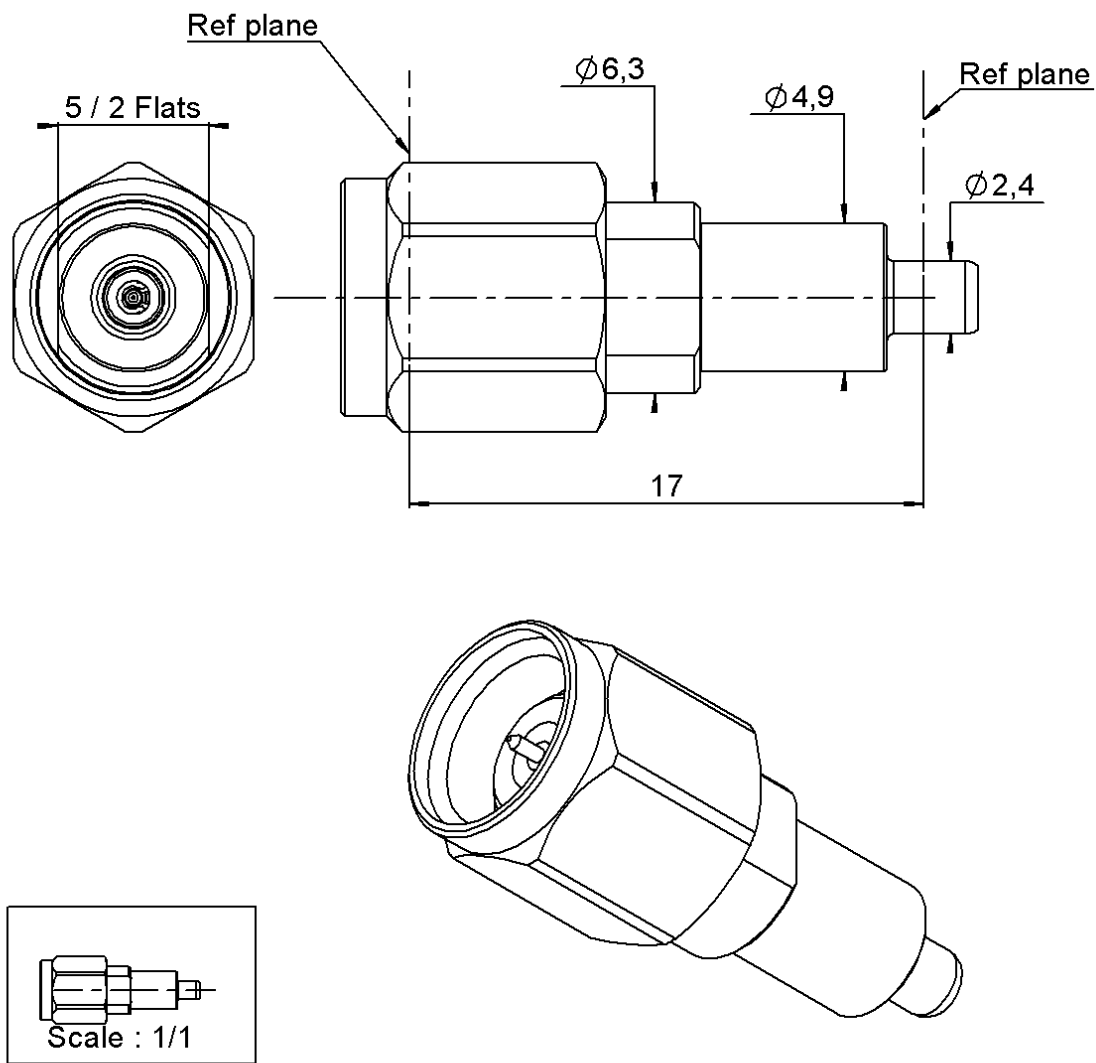

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
Center contact	BERYLLIUM COPPER	NPGR
Outer contact	-	-
Insulator	PEEK	-
Gasket	-	NICKEL 2
Others parts	BERYLLIUM COPPER	-
-	-	-
-	-	-

PAGE 2/2	ISSUE 1339	SERIES ADAPT-MES	PART NUMBER R191554000
-----------------	-------------------	-------------------------	-------------------------------

PACKAGING

Standard	Unit	Other
UNITAIRE	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		0-40	GHz
VSWR	1.05	+	0,0040 x F(GHz) Maxi
Insertion loss		0.25	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	NA	- F(GHz)) dB Maxi
Voltage rating		335	Veff Maxi
Dielectric withstanding voltage		500	Veff mini
Insulation resistance		5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		7	N mini
Axial force – Opposite end		7	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		95	N.cm
		0	N.cm
		0	N.cm
Panel nut			N.cm
Mating life		500	Cycles mini
Weight		3,9700	g

ENVIRONMENTAL

Operating	-65/+175	°C
Hermetic seal		Atm.cm3/s
Panel leakage		

SPECIFICATION

OTHER CHARACTERISTICS