
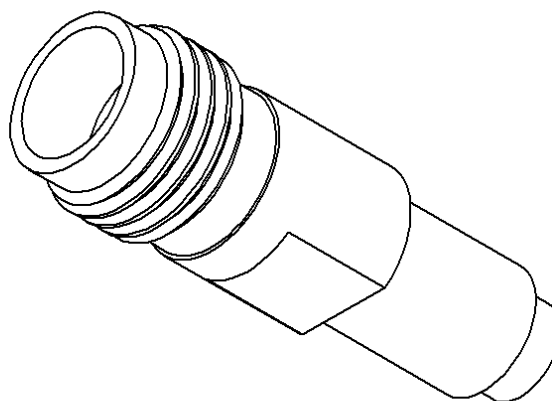




2.4MM FEMALE - MCC#12 FEMALE

R191.557.000

Série : ADAPT-MES

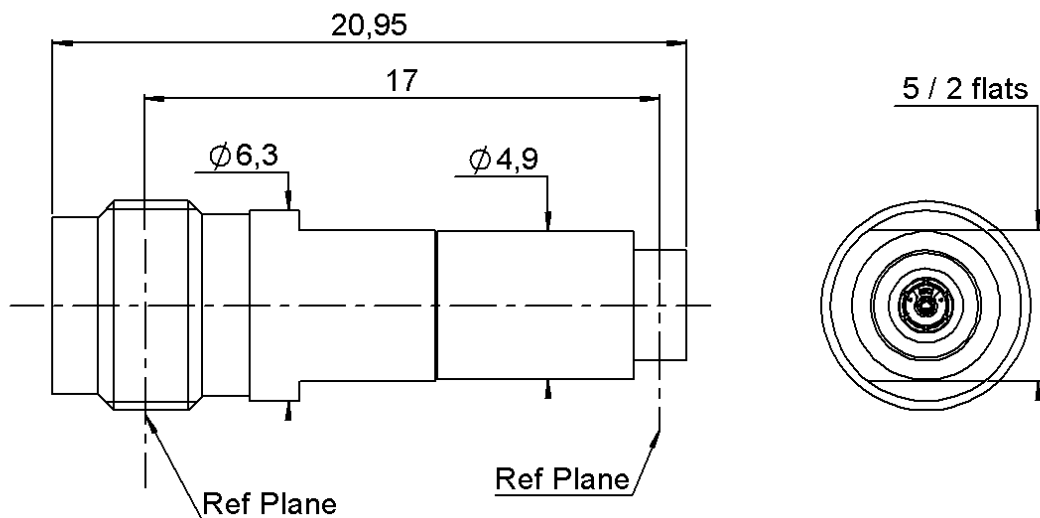

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
OUTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
INSULATOR	PEEK	
GASKET	-	
OTHERS PARTS	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
-	-	-
-	-	-

Issue : 1329 B

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 

2.4MM FEMALE - MCC#12 FEMALE**R191.557.000**

Série : ADAPT-MES

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-40	GHz
VSWR	1.05 + 0,0040	x F(GHz) Maxi
Insertion loss	0.25	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	500	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-65/+175	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	7 N mini
Axial force – Opposite end	7 N mini
Torque	NA N.cm mini

Recommended torque

Mating	0 N.cm
	0 N.cm
	0 N.cm
Panel nut	NA N.cm

Mating life	500 Cycles mini
Weight	3,6100 g

OTHER CHARACTERISTICS

Issue : 1329 B

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

