



QLI MALE- N MALE
STRAIGHT ADAPTER 6GHZ



R191792000

Série : **ADAPTER**

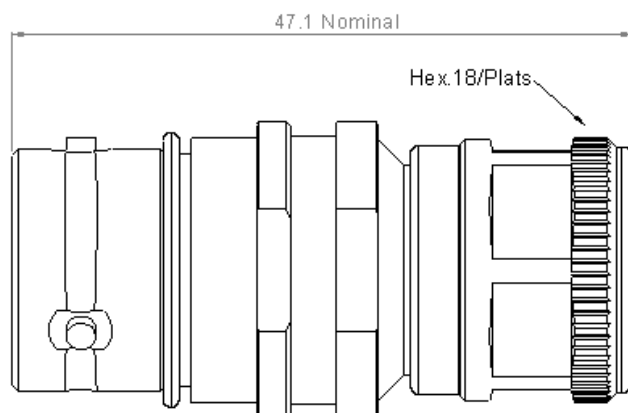

Scale 1:1

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	BBR
CENTER CONTACT	BRASS	Silver over Copper
OUTER CONTACT	BRASS	BBR
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS		
-	-	-
-	-	-

Issue : 1243 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 

QLI MALE- N MALE
STRAIGHT ADAPTER 6GHZ

R191792000

Série : ADAPTER

PACKAGING

Standard	Unit	Other
1	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	* + 0.0000	x F(GHz) Maxi
Insertion loss	**	$\sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating	NA	Veff Maxi
Dielectric withstanding voltage	2000	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-40/+80	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	NA N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

Recommended torque	
Mating	0 N.cm
	0 N.cm
	0 N.cm
Panel nut	0 N.cm

Mating life	100 Cycles mini
Weight	g

OTHER CHARACTERISTICS

* VSWR :	≤ 1.08 @ DC-2 GHz
	≤ 1.10 @ 2 – 3 GHz
	≤ 1.15 @ 3 – 6 GHz
**IL :	$\leq 0.06\text{dB}$ @ DC-2 GHz
	$\leq 0.1\text{dB}$ @ 2- 3 GHz
	$\leq 0.12\text{dB}$ @ 3 - 6 GHz

Issue : 1243 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.


RADIAL