REV.	DATE	DESCRIPTION
NC	08/04/02	INITIAL RELEASE

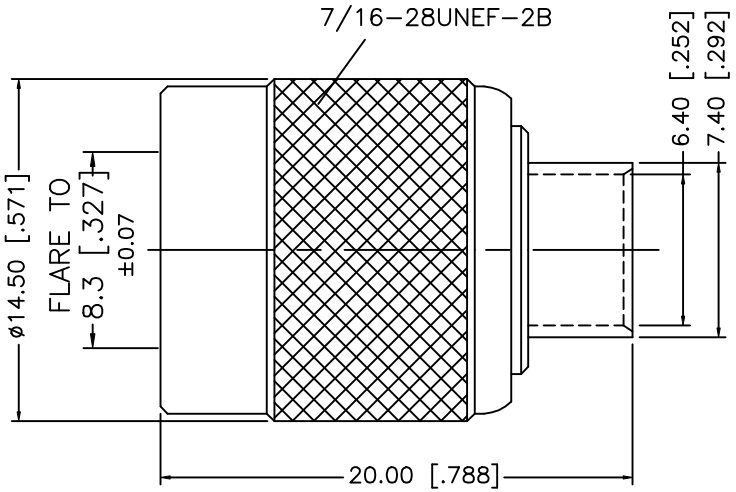

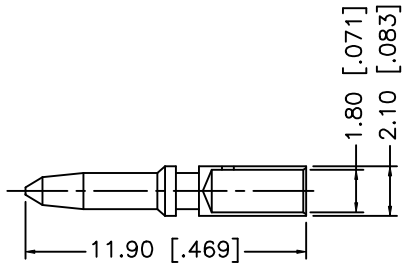



RECOMMENDED
CABLE STRIPPING DIM'S

CRIMP NOTES:

1. CONTACT PIN TO SOLDER

8			
7			
6			
5			
4	SHELL	BRASS	GOLD
3	CONTACT PIN	BRASS	GOLD
2	INSULATOR	TEFLON	NATURAL
1	BODY	BRASS	GOLD
	DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.XXX = ± 0.005"
.XX = ± 0.010"
.X = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	08/04/02
CHECKED		
ISSUED		

Amphenol - Connex
CONNECTOR CORPORATION

TITLE: TNC DIRECT SOLDER PLUG (FOR .250" SEMI RIGID CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	122484.DWG	NC

SCALE	PART NO.	SHEET
NA	122484	1 OF 1