




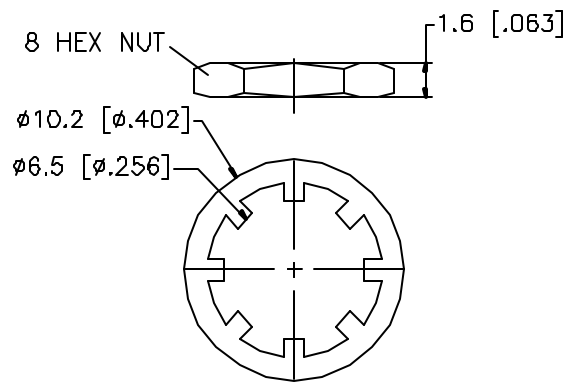




REV.	DATE	DESCRIPTION
NC	03/19/01	INITIAL RELEASE



RECOMMENDED
MOUNTING HOLE

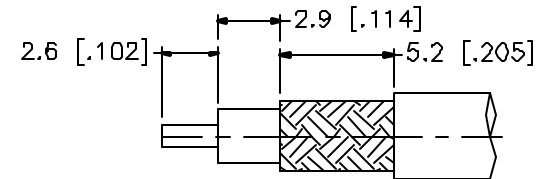

RECOMMENDED CABLE
STRIPPING DIM'S

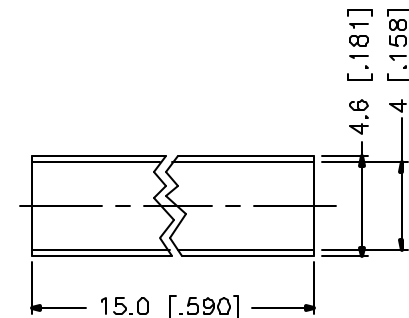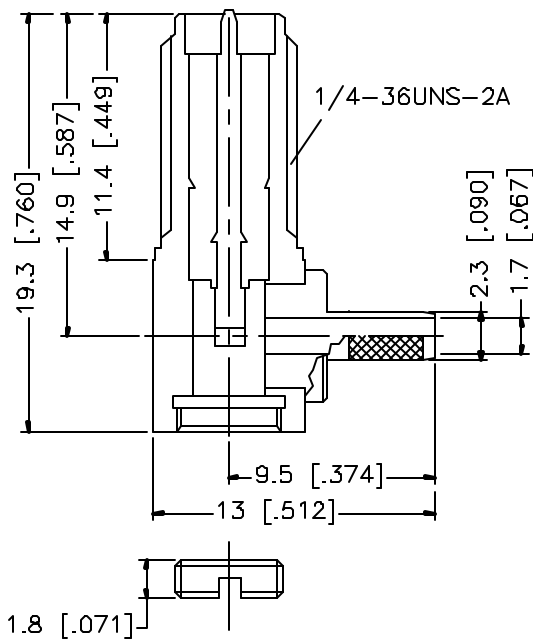

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE					
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	03/19/01	TITLE SMA REVERSE POLARITY R/A BULKHEAD JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			
2	INSULATOR	TEFLON	NATURAL		CHECKED						
3	CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED		SIZE FSCM NO DWG. NO REV				
4	FERRULE	COPPER	GOLD				A 99001 132245RP.DWG NC				
5	HEAT SHRINK TUBE										
6											
7											
8				DO NOT SCALE DRAWING			SCALE NA	PART NO. 132245RP	SHEET 1	OF 1	