

MAEXP190H-1277T

Silicon Double Balanced HMIC Mixer 1700 – 2200 MHz

Rev. V2

Features

- + 33 dBm Typical Input IP3
- 8.3 dB Typical Conversion Loss
- + 17 to + 19 dBm LO Drive
- Fully Balanced Passive Mixer
- NO External Matching Required
- Low Cost Miniature Plastic MLP Package


Description

M/A-COM's MA4EXP190H-1277 is a silicon monolithic 1700-2200 MHz, high barrier, double balanced mixer in a low cost, miniature surface mount FQFP-N 3mm Square, 16 lead plastic package. The die uses M/A-COM's unique HMIC silicon/glass process to realize low loss passive elements while retaining the advantages of high barrier silicon schottky barrier diodes to produce a compact device.

Applications

These mixers are well suited for GSM, DCS, PCS, CDMA and UMTS base station applications where small size and high performance are required. Typical applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

MLP 3mm Package - Circuit Side View



PIN 1

PIN 16

PIN	Function	PIN	Function
1	N/C	9	N/C
2	N/C	10	RF
3	LO	11	N/C
4	N/C	12	N/C
5	N/C	13	N/C
6	N/C	14	IF
7	N/C	15	N/C
8	N/C	16	N/C

Ordering Information

Model No.	Package
MA4EXP190H-1277T	Tape and Reel

Electrical Specifications @ +25°C

Parameter	Frequency Range	Test Conditions	Units	Min.	Avg.	Max.
Conversion Loss	1925 MHz 1700 – 2200 MHz	LO Drive = +19 dBm RF = -10 dBm, IF = 60 MHz	dB	-	8.3 8.4	9.5 9.5
L - R Isolation	1925 MHz 1700 – 2200 MHz	LO Drive = +17 dBm RF Level = -10 dBm	dB	-	48 48	- -
L - I Isolation	1925 MHz 1700 – 2200 MHz	LO Drive = +17 dBm RF Level = -10 dBm	dB	-	46 44	- -
R - I Isolation	1925 MHz 1700 – 2200 MHz	LO Drive = +17 dBm RF Level = -10 dBm	dB	-	25 25	- -
RF VSWR	1925 MHz 1700 – 2200 MHz	LO Drive = +17 dBm RF Level = -10 dBm	Ratio	-	1.1:1 1.3:1	- -
IF VSWR	DC - 500 MHz	LO Drive = +17 dBm IF Level = -10 dBm	Ratio	-	1.6:1	-
Input IP3	2025 MHz 1700 – 2200 MHz	LO Drive = +19 dBm RF = -10 dBm, IF = 60 MHz	dBm	-	34.0 32.0	- -
Input 1 dB Compression	1925 MHz 1700 – 2200 MHz	LO Drive = +17 dBm IF = 60 MHz	dBm	-	11.3 11.2	- -
IF 1 dB Bandwidth	DC - 400 MHz	LO = 1850 MHz @ +17dBm	MHz	0	-	400

MAEXP190H-1277T




Silicon Double Balanced HMIC Mixer
1700 – 2200 MHz


Rev. V2

Typical Performance Curves (LO Drive = +17dBm, RF = -10dBm, IF = 60MHz)

CONVERSION LOSS

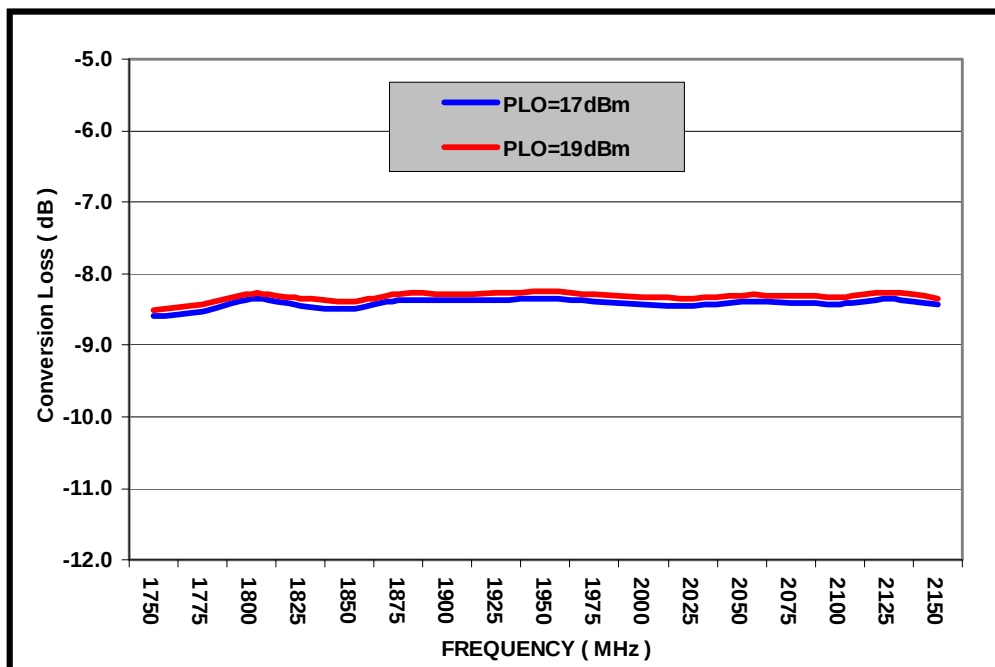

ISOLATION

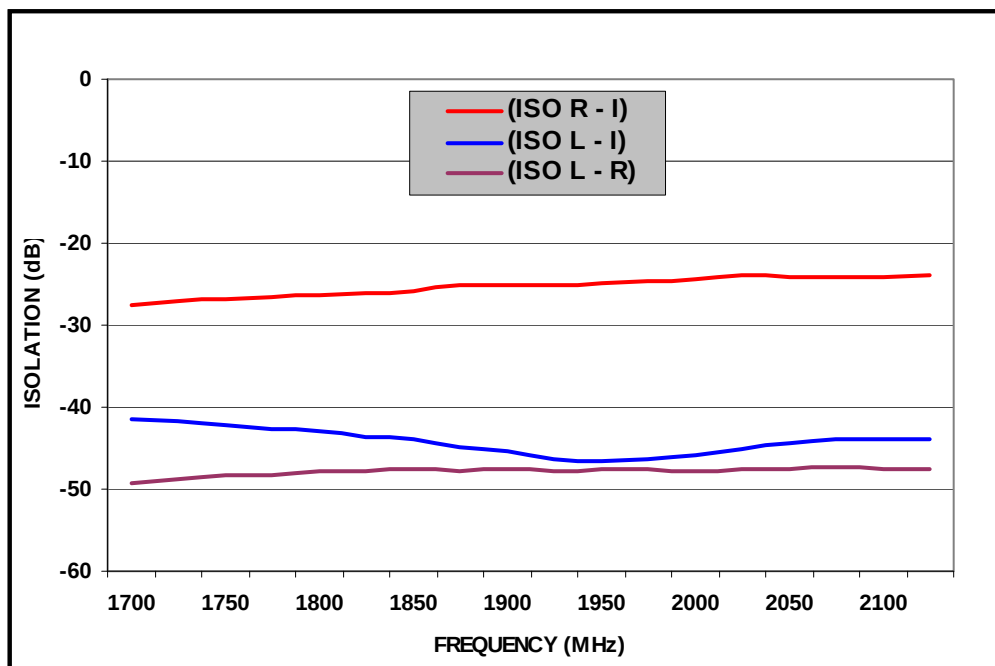


MAEXP190H-1277T

Silicon Double Balanced HMIC Mixer
1700 – 2200 MHz


Rev. V2

Typical Performance Curves (LO Drive = +17dBm, RF = -10dBm, IF = 60MHz)

RF & IF VSWR

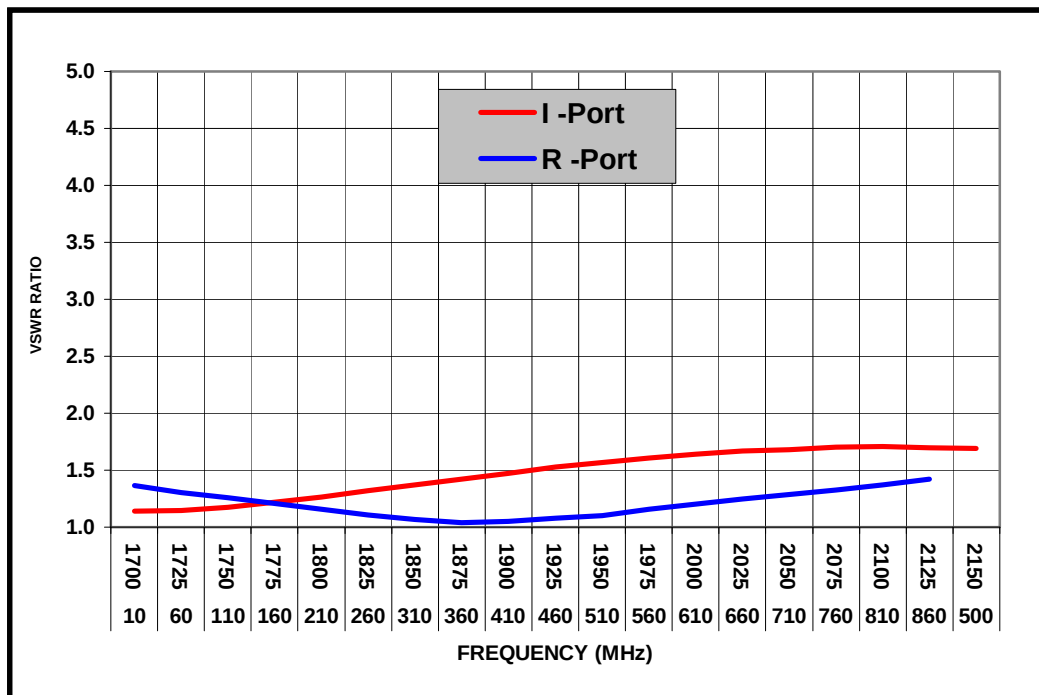

INPUT IP3 & 1dB Compression Power

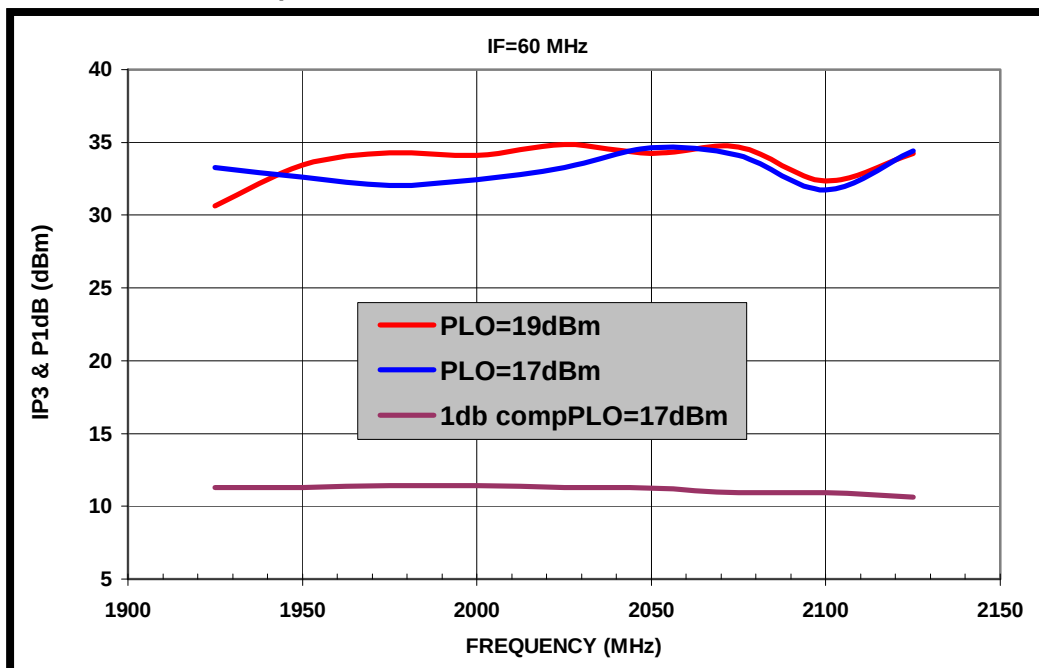

MAEXP190H-1277T




Silicon Double Balanced HMIC Mixer
1700 – 2200 MHz

Rev. V2

Typical Performance Curves (LO Drive = +19dbm, RF = -10dBm, IF = 200 MHz)

INPUT IP3

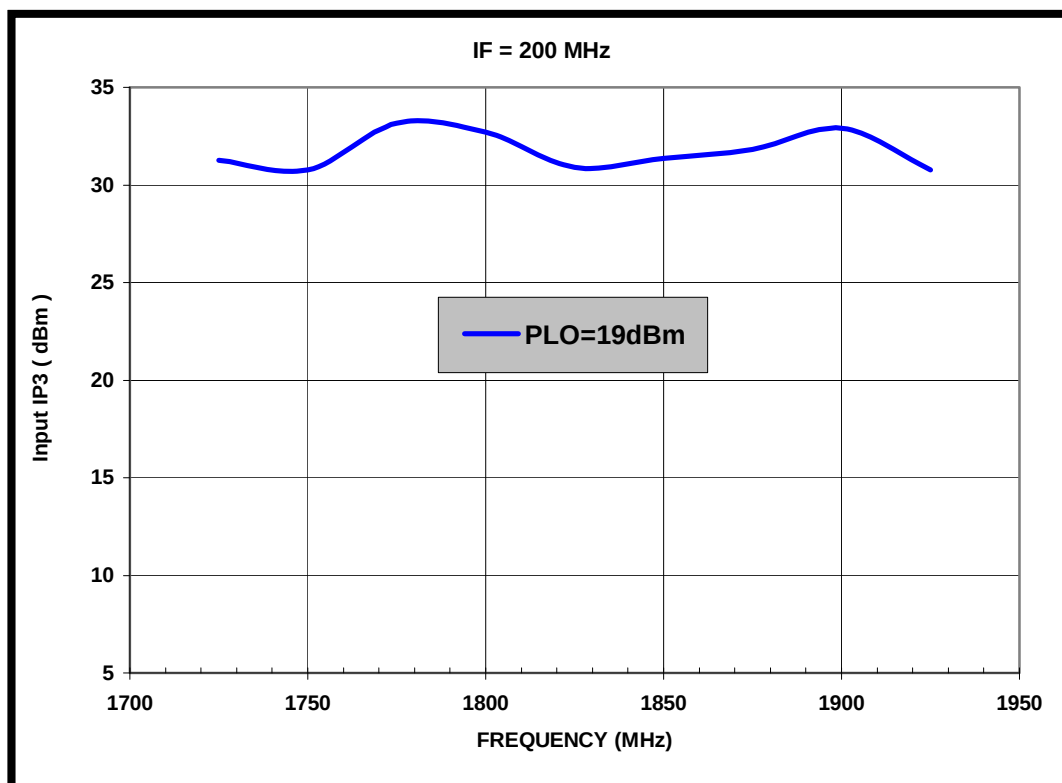


MAEXP190H-1277T

Silicon Double Balanced HMIC Mixer
1700 – 2200 MHz

Rev. V2

Mixer Schematic

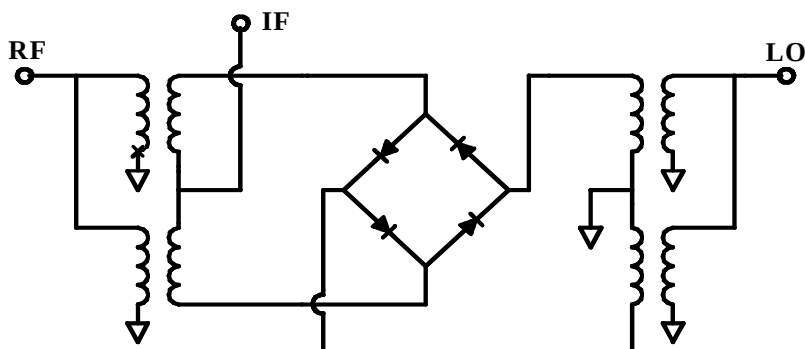

Absolute Maximum Ratings¹

Parameter	Maximum Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Incident LO Power	+20 dBm C.W.
Incident RF Power	+20 dBm C.W.

1. Exceeding these limits may cause permanent damage.

MAEXP190H-1277T

Silicon Double Balanced HMIC Mixer
1700 – 2200 MHz

Rev. V2

MA4EXP190H-1277 Outline – 3mm FQFP-N 16 Lead Saw Singulated

