

## CENTIGRID® ESTABLISHED RELIABILITY MILITARY SENSITIVE DPDT



SERIES	RELAY TYPE
134	DPDT, sensitive non-latching relay
134D	DPDT, sensitive non-latching relay with internal diode for coil transient suppression
134DD	DPDT, sensitive non-latching relay with internal diodes for coil transient suppression and polarity reversal protection

### DESCRIPTION

The 134 sensitive Centigridd® relay retains the same features as the 114 standard Centigridd® relay with only a minimal increase in profile height (.375 in.). Its .100-inch grid spaced terminals, which preclude the need for spreader pads, and its low profile make the 134 relay ideal for applications where high packaging density is important.

The following unique construction features and manufacturing techniques provide excellent resistance to environmental extremes and overall high reliability:

#### The 134 feature:

- All welded construction.
- Advanced cleaning techniques provide maximum assurance of internal cleanliness.
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity.
- High force/mass ratios for resistance to shock and vibration.
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities.

The Series 134D and 134DD have internal discrete silicon diodes for coil suppression and polarity reversal protection.


The sensitive 134 Centigridd® relay has a high resistance coil, thus requiring extremely low operating power (200 mW typical). The advantages of reduced heat dissipation and power supply demands are a plus.

By virtue of its inherently low intercontact capacitance and contact circuit losses, the 134 relay has proven to be an excellent ultraminiature RF switch for frequency ranges well into the UHF spectrum. A typical RF application for the Centigridd® relay is in handheld radio transceivers, wherein the combined features of good RF performance, small size, low coil power dissipation and high reliability make it a preferred method of Transmit-Receive switching

### ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS


<b>Temperature</b> (Ambient)	-65°C to +125°C
<b>Vibration</b> (Note 1)	30 g's to 3000 Hz
<b>Shock</b> (Note 1)	50 g's, 6ms half sine
<b>Acceleration</b>	50 g's
<b>Enclosure</b>	Hermetically sealed
<b>Weight</b>	0.15 oz. (4.3g) max.
<b>Reflow Temperature</b>	260°C max. temp. 1 min. max

### INTERNAL CONSTRUCTION

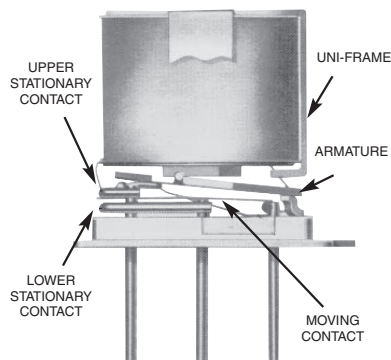


### Part Numbering System (Note 5 & 6)

#### T<sup>2</sup>R Established Reliability Relays

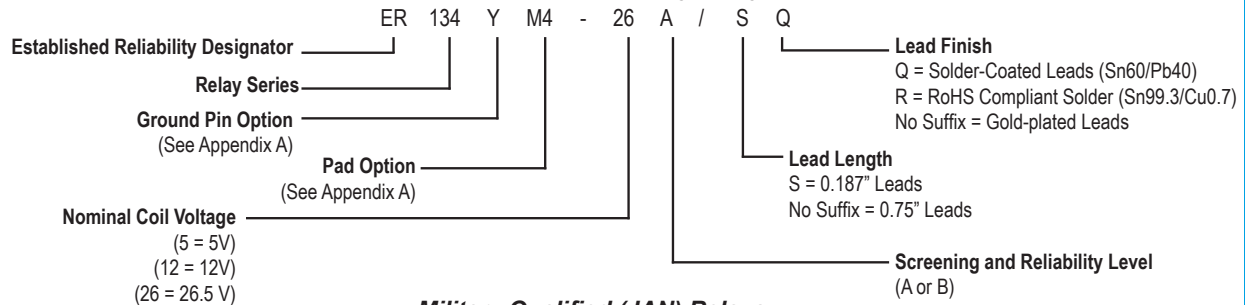

#### Military Qualified (JAN) Relays

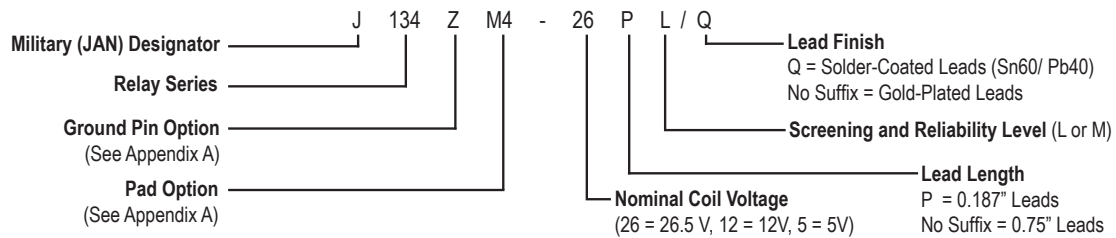


### GENERAL ELECTRICAL SPECIFICATIONS (-65 °C to 125 °C unless otherwise noted. See notes 2 & 3.)

<b>Contact Arrangement</b>		2 Form C (DPDT)
<b>Rated Duty</b>		Continuous
<b>Contact Resistance</b>		0.10 $\Omega$ max.
<b>Contact Load Rating (DC)</b>		Resistive: 1 A / 28 V <sub>dc</sub> Inductive: 200 mA / 28 V <sub>dc</sub> (320mH) Lamp: 100 mA / 28 V <sub>dc</sub> (320mH) Low level: 10 to 50 $\mu$ A @ 10 to 50 mV
<b>Contact Load Rating (AC)</b>		Resistive: 250 mA / 115V <sub>ac</sub> , 60 and 400 Hz (Case not grounded) 100 mA / 115 V <sub>ac</sub> , 60 and 400 Hz (Case grounded)
<b>Contact Life Ratings</b>		10,000,000 cycles (typical) at low level 1,000,000 cycles (typical) at 0.5 A / 28 V <sub>dc</sub> resistive 100,000 cycles min. at all other loads specified above
<b>Contact Overload Rating</b>		2 A / 28 V <sub>dc</sub> Resistive (100 cycles min.)
<b>Coil Operating Power</b>		200 mW typical at nominal rated voltage
<b>Contact Carry Rating</b>		Contact Factory
<b>Operate Time</b>		4.0 ms max. @ nominal rated coil voltage
<b>Release Time</b>	<b>134</b>	2.0 ms max.
	<b>134D</b>	7.5 ms max.
	<b>134DD</b>	
<b>Contact Bounce</b>		1.5 ms max.
<b>Intercontact Capacitance</b>		0.4 pf typical
<b>Insulation Resistance</b>		10,000 M $\Omega$ min. between mutually isolated terminals
<b>Dielectric Strength (V<sub>rms</sub>/60 Hz)</b>		Atmospheric pressure: 500      70,000 ft: 125
<b>Negative Coil Transient (V<sub>dc</sub>)</b>	<b>134D</b> <b>134DD</b>	1.0 V <sub>dc</sub> Max.
<b>Diode P.I.V. (V<sub>dc</sub>)</b>	<b>134D</b> <b>134DD</b>	100 V <sub>dc</sub> Min.


**DETAILED ELECTRICAL SPECIFICATIONS** (-65 °C to 125 °C unless otherwise noted. See note 3.)

BASE PART NUMBERS (134, 134D, 134DD)		134-5 134D-5 134DD-5	134-12 134D-12 134DD-12	134-26 134D-26 134DD-26
Coil Voltage	Nom.	5.0	12.0	26.5
	Max.	7.5	20.0	40.0
Coil Resistance (Ohms $\pm 10\%$ @25°C)	134, 134D	100	800	3200
	134D (Note 4)	64	800	3200
Coil Current (134DD) (mA <sub>dc</sub> @25°C)	Min.	56.8	12.5	7.2
	Max.	78.1	16.0	9.0
Pick-up Voltage (V <sub>dc</sub> , Max)	134 134D	3.5	9.0	18.0
	134DD	3.7	11.0	19.0
Drop-out Voltage (V <sub>dc</sub> )	134, 134D	Min.	0.12	0.41
		Max.	2.5	6.5
	134DD	Min.	0.7	1.3
		Max.	2.6	5.8

**PERFORMANCE CURVES (Note 2)**

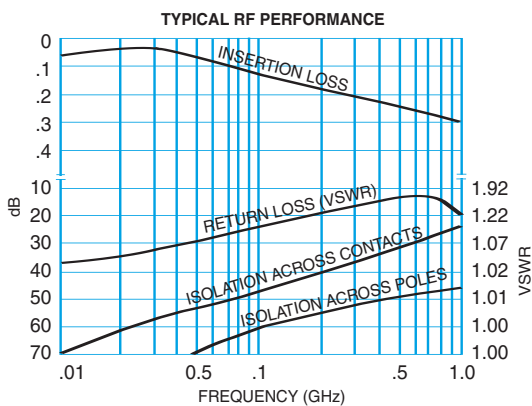

**FIGURE 1**

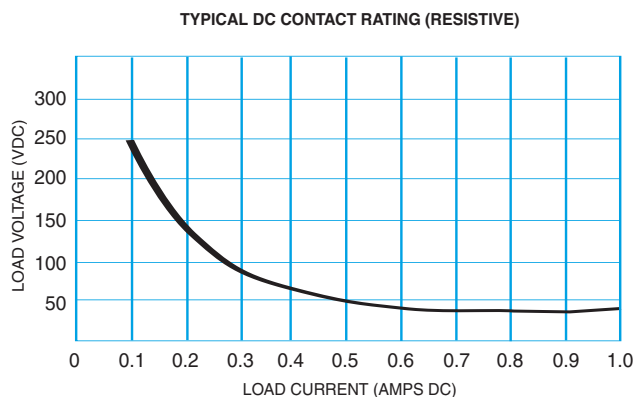


**FIGURE 2**


**NOTES:**

- Relay contacts will exhibit no chatter in excess of 10  $\mu$ s or transfer in excess of 1  $\mu$ s.
- "Typical" characteristics are based on available data and are best estimates. No on-going verification tests are performed.
- Unless otherwise specified, parameters are initial values.
- For reference only. Coil resistance not directly measurable at relay terminals due to internal series semiconductor, 134DD only
- Unless otherwise specified, relays will be supplied with gold-plated leads.
- The slash and characters appearing after the slash are not marked on the relay.

## OUTLINE DIMENSIONS

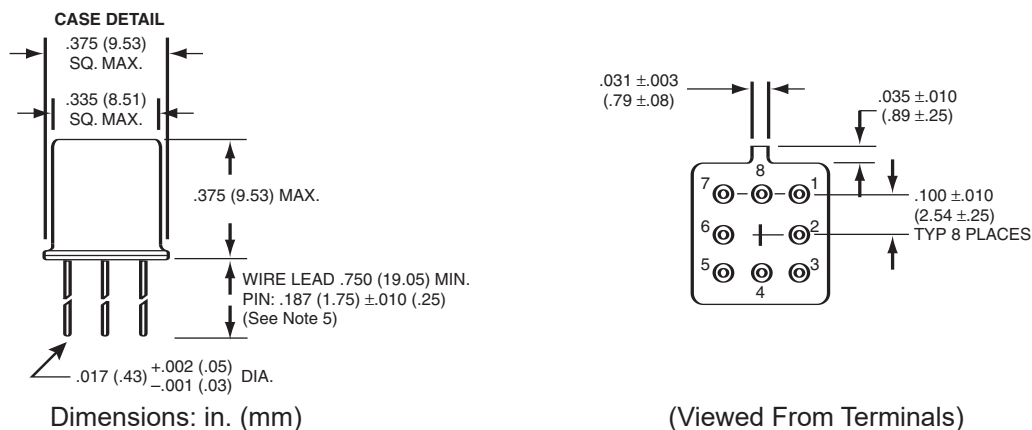


## SCHEMATIC DIAGRAMS

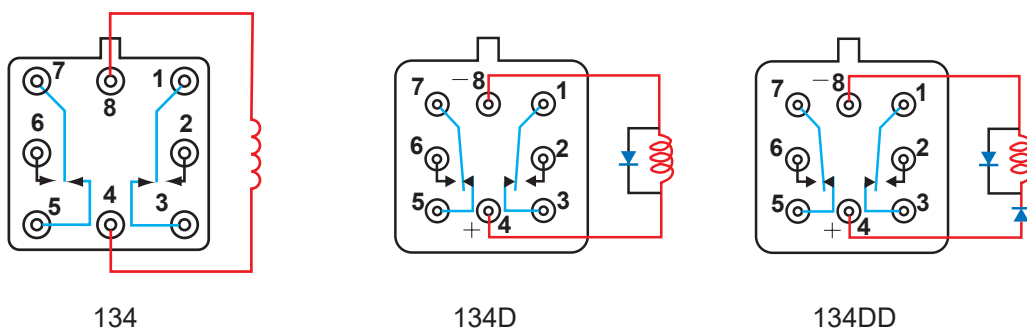


## APPENDIX A : Spacer Pads

### Pad designation and bottom view dimensions



"M4" Spacer Pad for Centigrad®

### Height

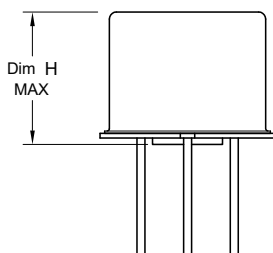

### For use with the following:


### Dim. H Max.

172	.305 (7.75)
ER114, J114	.300 (7.62)
ER134, J134	.400 (10.16)
RF100	.315 (8.00)
RF103	.420 (10.67)

#### Notes:

1. Spacer pad material: Polyester film.
2. To specify a "M4" spacer pad, refer to the mounting variants portion of the part numbering example in the applicable datasheet.
3. Dimensions are in inches (mm).
4. Unless otherwise specified, tolerance is  $\pm .010$ " (.25 mm).
5. Add 10 mΩ to the contact resistance shown in the datasheet.
6. Add 0.01 oz. (0.25 g) to the weight of the relay assembly shown in the datasheet.

## APPENDIX A : Ground Pin Positions

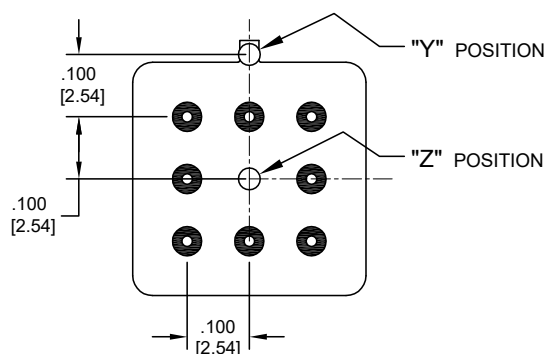

**Centigrad® Relays:**  
RF100, RF103, ER114, ER134, 172

- Indicates ground pin position
- Indicates glass insulated lead position
- ⊙ Indicates ground pin or lead position depending on relay type

#### NOTES

1. Terminal views shown
2. Dimensions are in inches (mm)
3. Tolerances:  $\pm .010$  ( $\pm .25$ ) unless otherwise specified
4. Ground pin positions are within .015 (0.38) dia. of true position
5. Ground pin head dia., 0.035 (0.89) ref: height 0.010 (0.25) ref.
6. Lead dia. 0.017 (0.43) nom.