

E-Series RF 2:1 Flux Coupled Transformer

1.0 - 350 MHz




Features

- Surface Mount
- 2:1 Impedance Ratio
- CT on Secondary
- Available on Tape & Reel



SM-138 Package

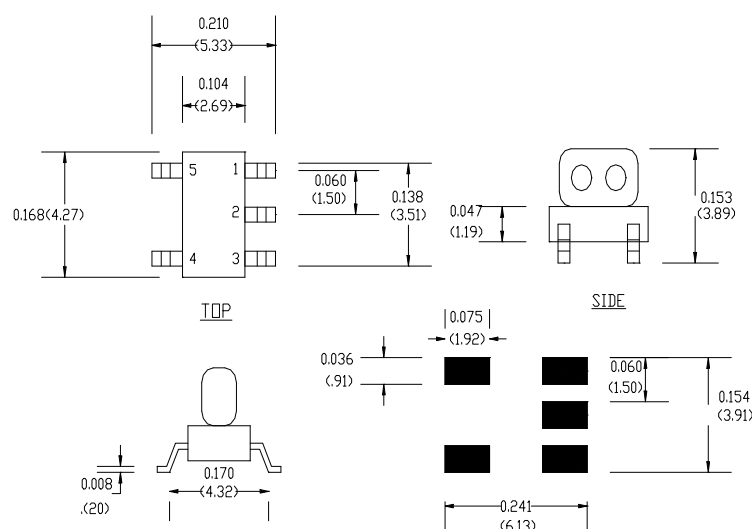


SUGGEST SOLDER FOOTPRINT

Description

M/A-COM's MABAES0040 is a 2:1 RF flux coupled transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

Schematic

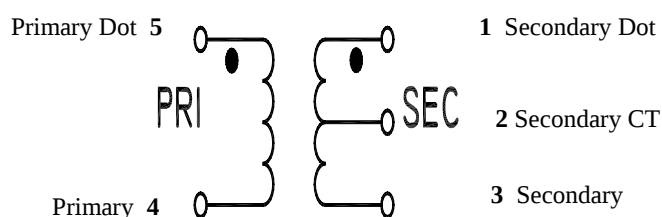

Electrical Specifications @25°C

Parameter	Units	Nominal	Maximum	Minimum	Typical
Frequency Range 1.0 - 350	MHz	—	—	—	—
Insertion Loss					
1 - 150 MHz	dB	—	1.0	—	0.7
150 - 250 MHz	dB	—	2.0	—	1.6
Amplitude Unbalance					
1 - 150 MHz	dB	—	0.5	—	0.3
150 - 250 MHz	dB	—	1.0	—	0.7
250 - 350 MHz	dB	—	2.0	—	1.5
Phase Unbalance					
1 - 250 MHz	Degrees	—	5	—	2.5
250 - 350 MHz	Degrees	—	12	—	8

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 V1.00
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

Functional Configuration


Function	Pin No.
Secondary	3
Secondary CT	2
Secondary Dot	1
Primary Dot	5
Primary	4

Typical Performance


Insertion Loss

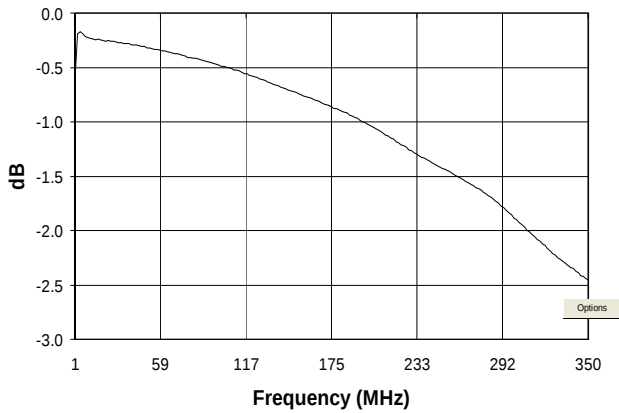

Phase Unbalance

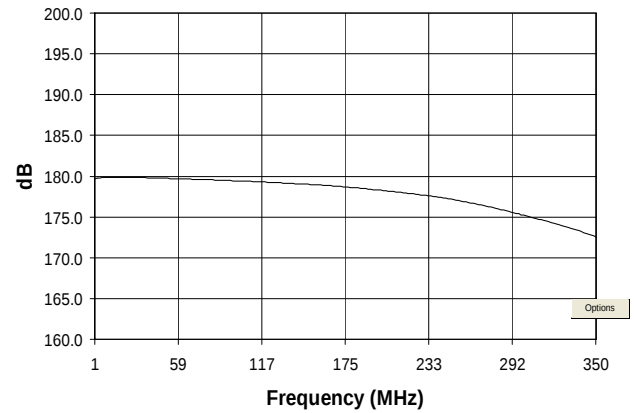

Amplitude Unbalance

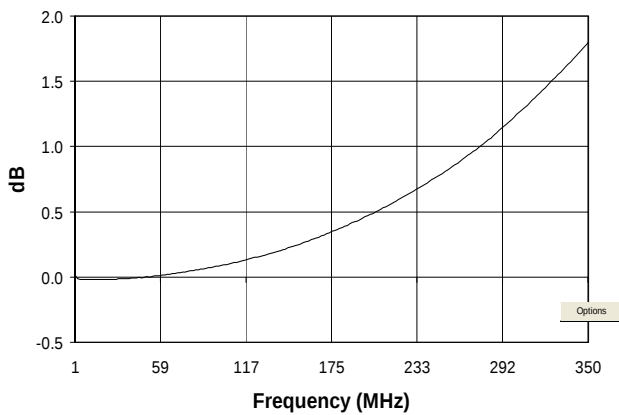

Note: All measurements performed on Hewlett Packard 8753D Network Analyzer (201 sample points, linear scale) in a 50 ohm coplanar waveguide environment. Tables created using MDS software.