



TSXDC-DFM

Features

- · Surge current of 40kA
- Max Power 1000W
- Frequency range from 698 MHz to 2700 MHz
- Waterproof IP67 rated
- 7/16 DIN Female to 7/16 DIN Male connectors

Applications

- · Cellular communication systems
- Public safety systems

- DC Pass
- VSWR <1.2:1
- · Low insertion loss
- CE & RoHS compliant
- Bi-Directional
- Emergency response systems
- Industrial Communications

Description

RF surge protector (also known as lightning arrester) TSXDC-DFM from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type DC Handling

Surge Filter DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.698		2.7	GHz
Impedance		50		Ohms
VSWR			1.2:1	
Insertion Loss			0.1	dB
Passive Intermodulation		-125	-155	dBc
Operating Voltage (DC)			60	Volts
Operating Current (DC)			6	А
Resistance (DC)			20	mOhms
Input Power, CW			1	kWatts
@ 920 MHz				
Surge Current		20	40	kA
IEC 61000-4-5 8/20µs WAVEFO	ORM			
Throughput Voltage			500	Volts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 7/16 F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFM





TSXDC-DFM

<500V 2kA IEC 61000-4-5 8/20µs WAVEFORM

Throughput Energy 25 mJ

FOR 2kA IEC 61000-4-5 8/20µs WAVEFORM

Mechanical Specifications

Size

 Length
 3.46 in [87.88 mm]

 Width/Diameter
 1.73 in [43.94 mm]

 Height
 1.94 in [49.28 mm]

 Weight
 1.4 lbs [635.03 g]

Configuration

Input Connector 7/16 DIN Female
Output Connector 7/16 DIN Male

Environmental Specifications

Temperature

Operating Range -50 to +85 deg C

Ingress Protection (IP) Rating

Humidity 95%, Non-condensing, 100% External

Compliance Certifications

CE

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 7/16 F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFM





TSXDC-DFM

Typical Performance Data

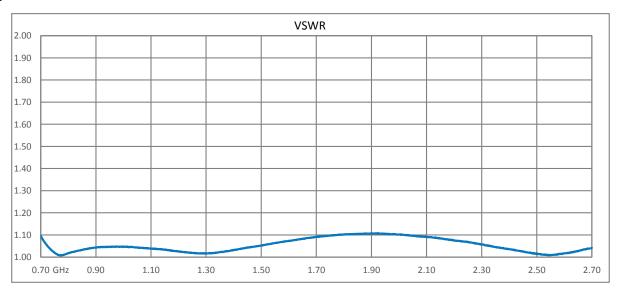


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 7/16 F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFM





TSXDC-DFM

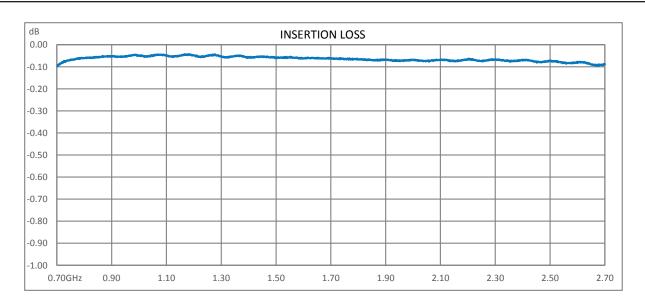

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 7/16 F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, 1000W, IP67, 60 V Max., 25mJ, 40kA, Filter, Low PIM TSXDC-DFM

URL: https://www.polyphaser.com/7-16-surge-protector-2.7ghz-filter-tsxdc-dfm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

TSXDC-DFM CAD Drawing

