

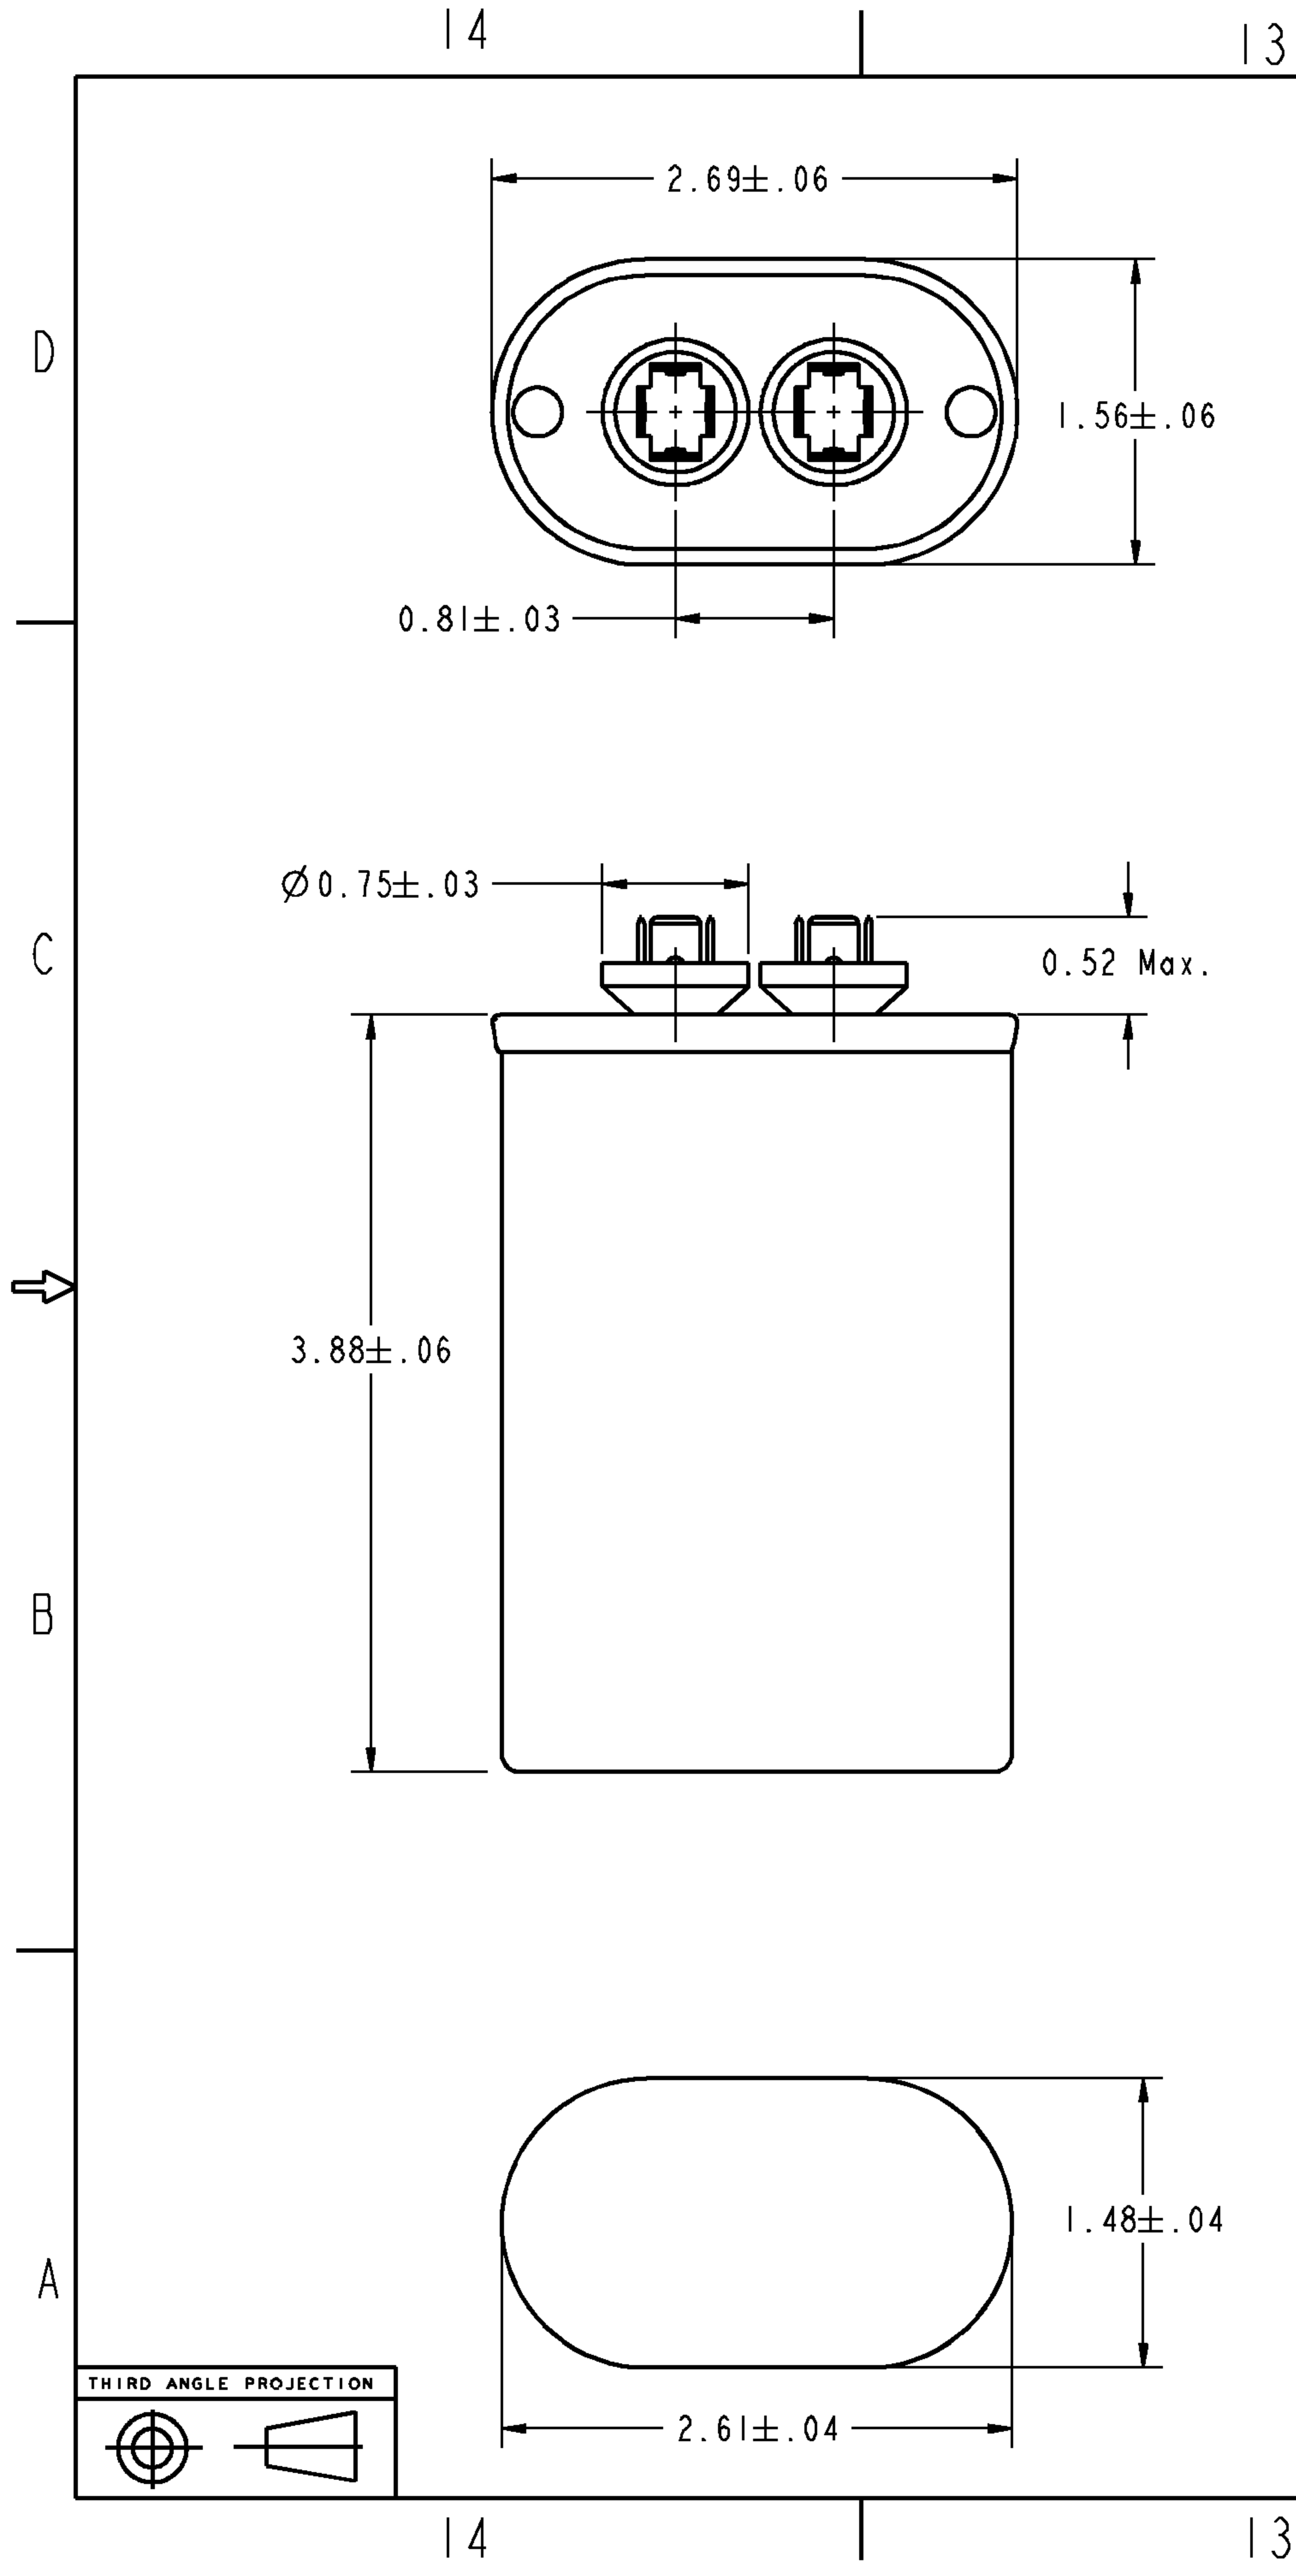


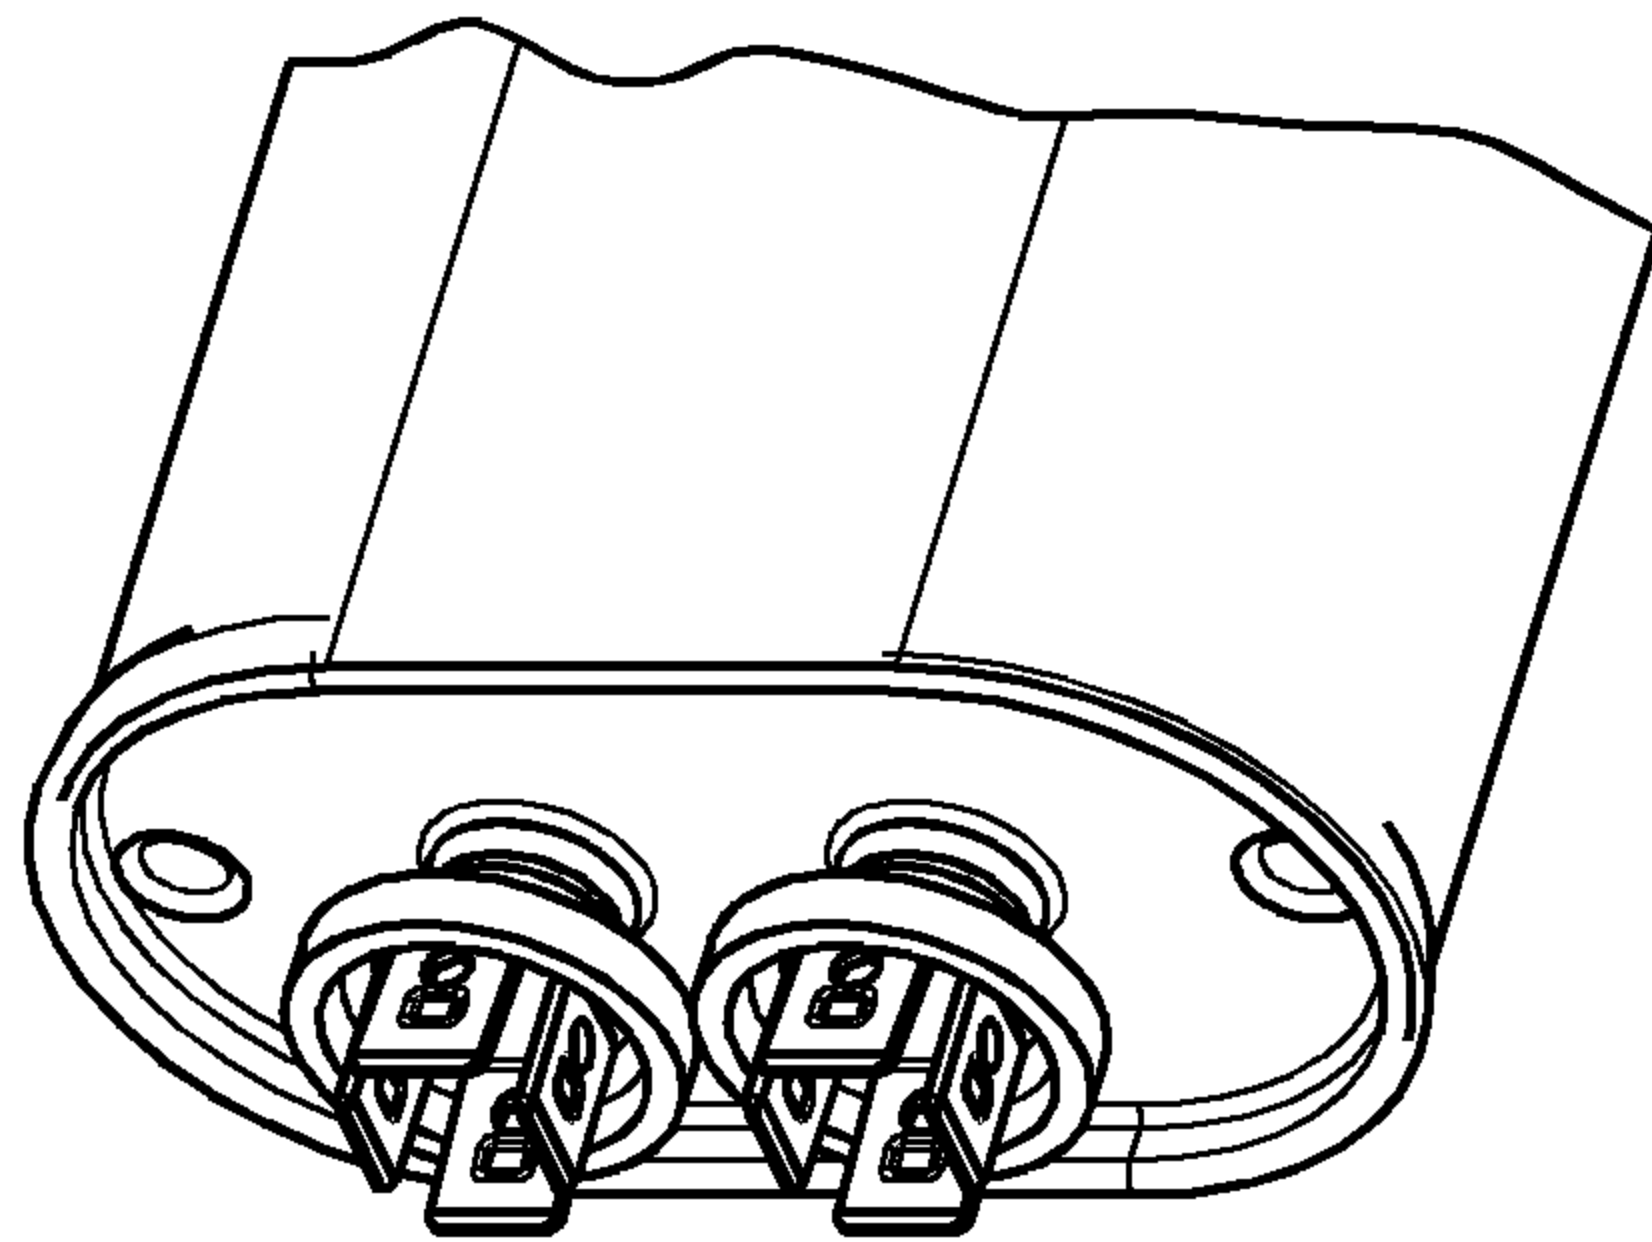

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of REGAL BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of RBC, and that the information shall be returned to RBC upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

SIZE		DRAWING NO.		27L6017		REV	SHEET
C						2	1
REVISIONS							
REV.	DESCRIPTION			DATE		APPROVED	
1	Modified per ECN NO. 0627.			11/11/05		HV	
2	Modified per ECN NO.0668			05/23/07		JC	

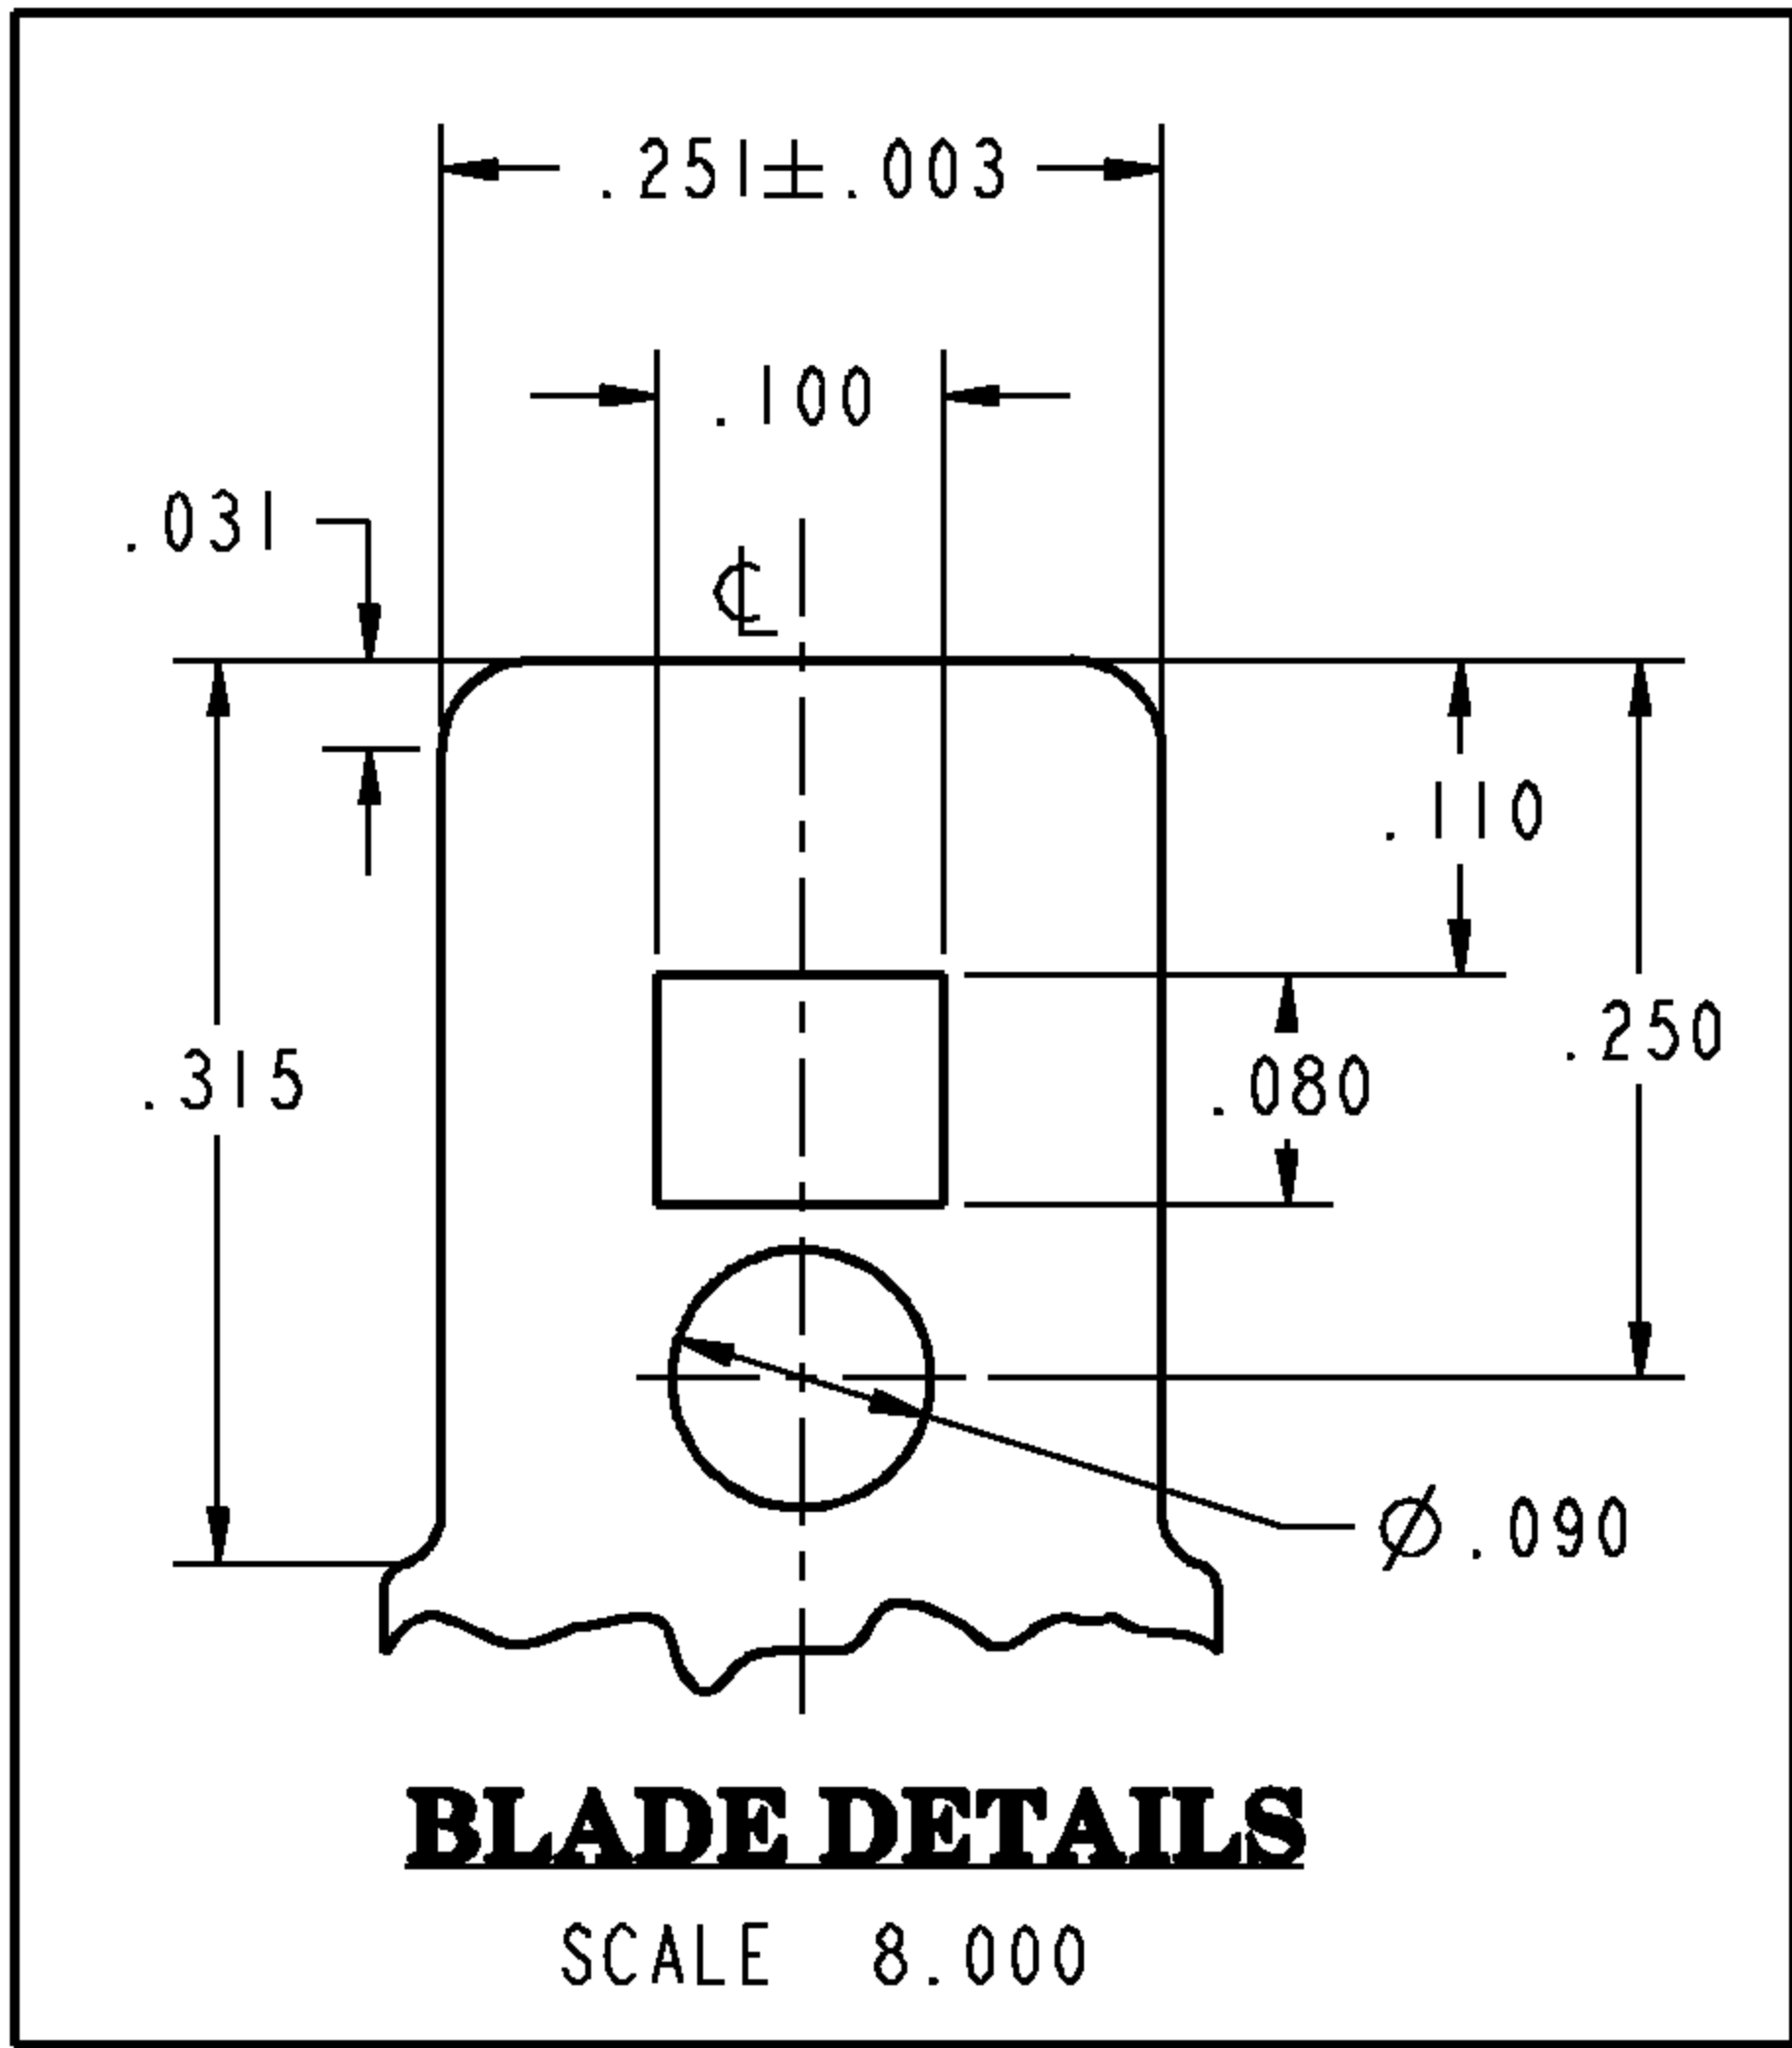

SPECIFICATIONS :

"GEM-III Capacitors are manufactured with High Grade Metallized Polypropylene Film"

Main Capacitance	: 10.00μF ±6%
Secondary Capacitance	: NIL
Volts	:660AC
Leakage Current	:30μA Max.
Frequency	:50/60 HZ
Operating Temperature	: -40 DEG C TO 70 DEG C
Storage Temperature	: -40 DEG C TO 90 DEG C
Operative Life	:60,000 HRS WITH 94% SURVIVAL
Dissipation Factor	:0.1% MAX.
Case Material	:ALUMINIUM
Cover Material	:STEEL TIN PLATED
Terminals	: 0.250"x0.031" Quick Connect Blades
Dielectric Fluid	:DIELEKTROL VI
Internal Protection	: UL RECOGNIZED PRESSURE SENSITIVE INTERRUPTER

FOR ADDITIONAL INFO REFER TO:		SIGNATURES		DATE		 REGAL-BELOIT CORPORATION	
APPLIED PRACTICES		MODEL	RAGHU.P.H	05/12/03			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DETAIL	RAGHU.P.H	05/12/03		TITLE GEM III CAPACITOR OUTLINE DRAWING	
TOLERANCE ON: 1 PL DECIMALS ± 0.1 2 PL DECIMALS ± 0.01 3 PL DECIMALS ± 0.001 ANGLES ± 0.5 FRACTIONS ± FINISH ✓		CHECKED	RAGHU.P.H	05/21/03			
		ENGRG	-	-			
		MFG	-	-			
		QUALITY	-	-			
		ISSUED	-	-			
				SIZE C		DRAWING 27L6017	
MATERIAL		SOLID MODEL: 2TCAPACITOR.ASM		SCALE: 1.250		REF. No: .	
						SHEET 1 OF 1	