



476KBM100MGU

RADIAL LEAD HIGH FREQUENCY/ LOW IMPEDANCE

Parts are RoHS compliant

Date code when parts became RoHS: 1424

APPLICATIONS: Switching regulators and power supplies, input filters

ELECTRICAL SPECIFICATIONS

Capacitance: 47 μ F

Dissipation Factor: 0.08 Max at 120 Hz and 20°C

Temperature Range: -40°C to +105°C

Impedance: 0.34 Ohms 100 kHz 20°C

Ohms 100 kHz -10°C

Tolerance: -20 %, +20 %

WVDC: 100 Volts DC

SVDC: 125 Volts DC

Ripple Current: 400 mA at 100 kHz and 105°C

Impedance Ratios: -25°C/20°C 2 and -40°C/20°C - 3

Leakage Current: .01CV or 3 μ A, whichever is greater

47 μ A after 2 Minutes

Load Life: 7000 hours at with % of rated voltage and with % of rated ripple current

Capacitance Change: of initial measured value

Dissipation Factor: of maximum specified value

Leakage Current: of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.05	0.05	0.05	0.3	0.7	1

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2.23	2.17	1.6	1.75	1.4	1.4	1	0

PHYSICAL DIMENSIONS

Diameter (D): 10 mm + 0.5 mm

Length (L): 12.5 mm + 1.5 mm


Lead Spacing (S): 5 mm +/- 0.5 mm

Coating: BlackPET sleeving

Lead Wire Diameter (d): 0.6 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

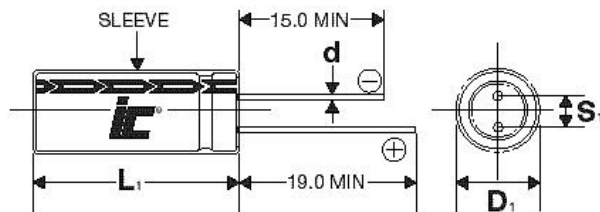

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved