

SMD ALUMINUM POLYMER CAPACITORS

ELECTRICAL SPECIFICATIONS

Impedance: 45 milliohm Max at 20°C and 100 KHz

N/A

Impedance Ratios: -55°C/20°C ≤ 1.25 and +105°C/20°C ≤ 1.25


280 μ A after 2 Minutes

Leakage Current: $\leq 100\%$ of maximum specified value

Temperature Multipliers:

45°C	60°C	70°C:	65°C	75°C	85°C	105°C	125°C
1	1	1	1	1	1	1	0

Lead Finish: Matte Tin

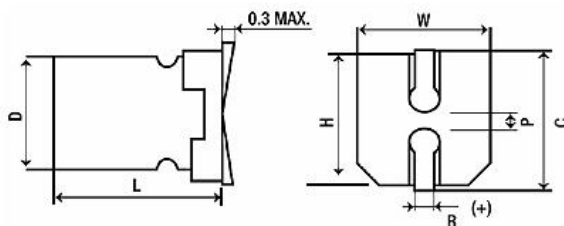

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier. All Rights Reserved