


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/30/00	—	INITIAL RELEASE
A	11/22/08	—	UPDATE DRAWING FORMAT

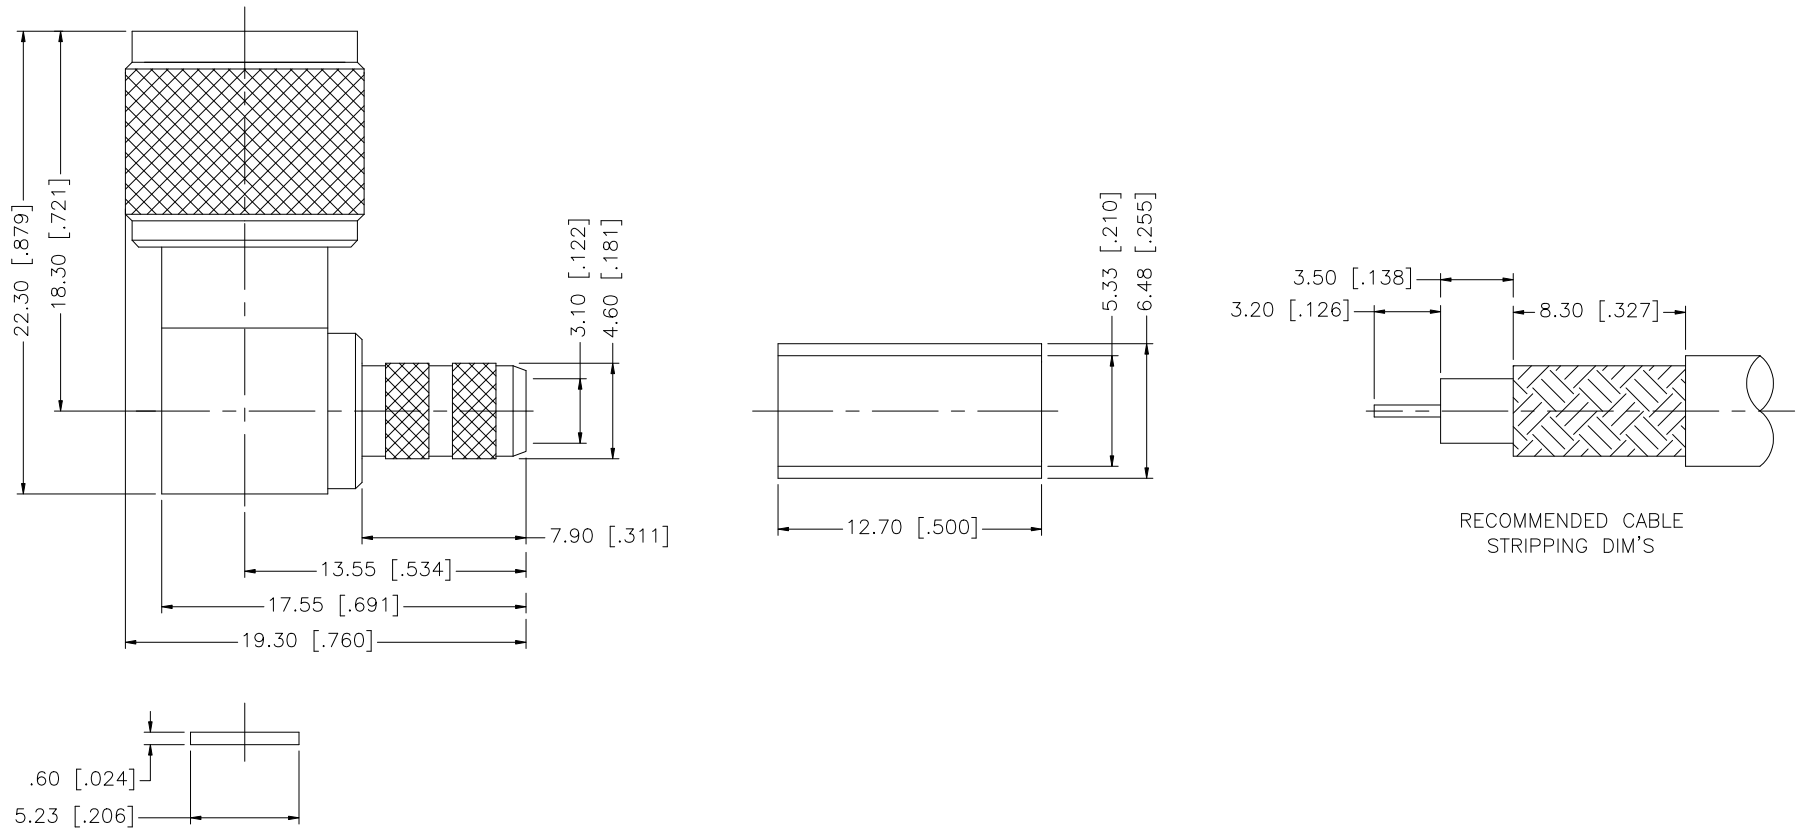

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE.213" [5.41]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	GRS	11/22/08							
7						CHECKED		PART DESCRIPTION							
6						ISSUED				MINI-UHF R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)					
5	FERRULE	COPPER	NICKEL	1		SHEET		1 OF 1							
4	COVER	BRASS	NICKEL	1						PART NO.					
3	CONTACT PIN	BRASS	GOLD	1						182323					
2	INSULATOR	PTFE	NATURAL	1						DWG. NO.					
1	BODY	BRASS	NICKEL	1					182323.DWG						
DESCRIPTION					MATERIAL	FINISH	QTY	C:/182/182323.DWG		REV.	A	SIZE	A	SCALE	NA