

SKM 600GA176D



SEMITRANS® 4

Trench IGBT Modules

SKM 600GA176D

Preliminary Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications

- AC inverter drives mains 575 - 790 V AC
- Public transport (auxiliary systems)

Remarks

- $I_{DC} \leq 500$ A limited for $T_{Terminal} = 100^\circ\text{C}$


Absolute Maximum Ratings		T _{case} = 25°C, unless otherwise specified		
Symbol	Conditions		Values	Units
IGBT				
V _{CES}	T _j = 25 °C		1700	V
I _C	T _j = 150 °C	T _c = 25 °C	660	A
		T _c = 80 °C	470	A
I _{CRM}	I _{CRM} =2xI _{Cnom}		800	A
V _{GES}			± 20	V
t _{psc}	V _{CC} = 1200 V; V _{GE} ≤ 20 V; T _j = 125 °C V _{CES} < 1700 V		10	μs
Inverse Diode				
I _F	T _j = 150 °C	T _c = 25 °C	600	A
		T _c = 80 °C	410	A
I _{FRM}	I _{FRM} =2xI _{Fnom}		800	A
I _{FSM}	t _p = 10 ms; sin. T _j = 150 °C		3800	A
Module				
I _{t(RMS)}			500	A
T _{vj}			- 40 ... +150	°C
T _{stg}			- 40 ... +125	°C
V _{isol}	AC, 1 min.		4000	V

Characteristics			T _{case} = 25°C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 16 mA		5,2	5,8	6,4	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C			0,2	0,6	mA
V _{CE0}	T _j = 25 °C			1	1,2	V
	T _j = 125 °C			0,9	1,1	V
r _{CE}	V _{GE} = 15 V T _j = 25°C			2,5	3,1	mΩ
	T _j = 125°C			3,9	4,5	mΩ
V _{CE(sat)}	I _{Cnom} = 400 A, V _{GE} = 15 V T _j = 25°C _{chiplev.}			2	2,45	V
	T _j = 125°C _{chiplev.}			2,45	2,9	V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		28,4			nF
C _{oes}			1,46			nF
C _{res}			1,17			nF
t _{d(on)}	R _{Gon} = 3 Ω	V _{CC} = 1200V I _C = 400A	290			ns
t _r			70			ns
E _{on}	R _{Goff} = 3 Ω	T _j = 125 °C V _{GE} = ±15V	255			mJ
t _{d(off)}			890			ns
t _f			160			ns
E _{off}			155			mJ
R _{th(j-c)}	per IGBT		0,044			K/W



GA

SKM 600GA176D

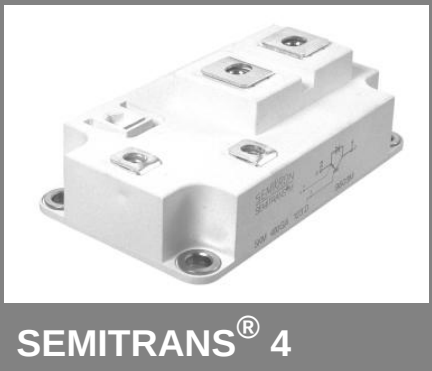

Trench IGBT Modules

SKM 600GA176D

Preliminary Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications

- AC inverter drives mains 575 - 790 V AC
- Public transport (auxiliary systems)

Remarks

- $I_{DC} \leq 500\text{ A}$ limited for $T_{Terminal} = 100^\circ\text{C}$

Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 400\text{ A}; V_{GE} = 0\text{ V}$				
	$T_j = 25\text{ }^\circ\text{C}_{chiplev.}$		1,6	1,9	V
	$T_j = 125\text{ }^\circ\text{C}_{chiplev.}$		1,6	1,9	V
V_{F0}	$T_j = 25\text{ }^\circ\text{C}$		1,1	1,3	V
r_F	$T_j = 25\text{ }^\circ\text{C}$		1,3	1,5	mΩ
I_{RRM}	$I_F = 400\text{ A}$		510		A
Q_{rr}	$di/dt = 5700\text{ A}/\mu\text{s}$		155		μC
E_{rr}	$V_{GE} = -15\text{ V}; V_{CC} = 1200\text{ V}$		102		mJ
$R_{th(j-c)D}$	per diode			0,09	K/W
Module					
L_{CE}			15	20	nH
$R_{CC'+EE'}$	res., terminal-chip		0,18		mΩ
	$T_{case} = 25\text{ }^\circ\text{C}$		0,22		mΩ
	$T_{case} = 125\text{ }^\circ\text{C}$				
$R_{th(c-s)}$	per module			0,038	K/W
M_s	to heat sink M6	3		5	Nm
M_t	to terminals M6 (M4)	2,5 (1,1)		5 (2)	Nm
w				330	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.



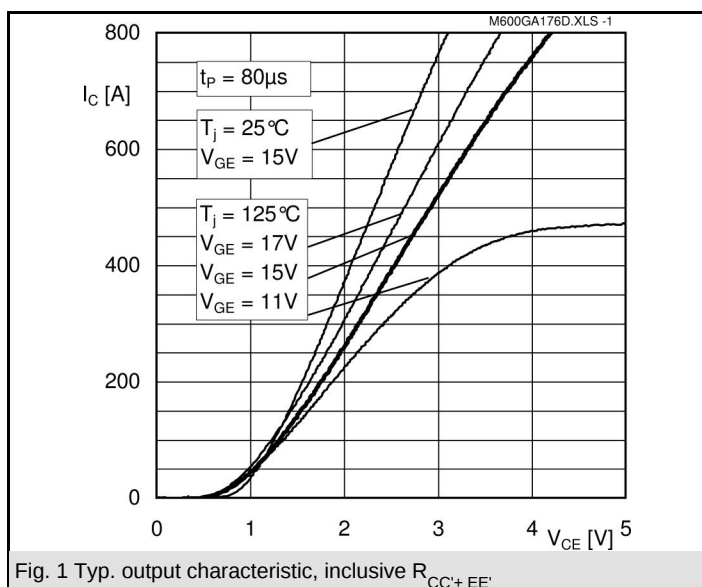


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

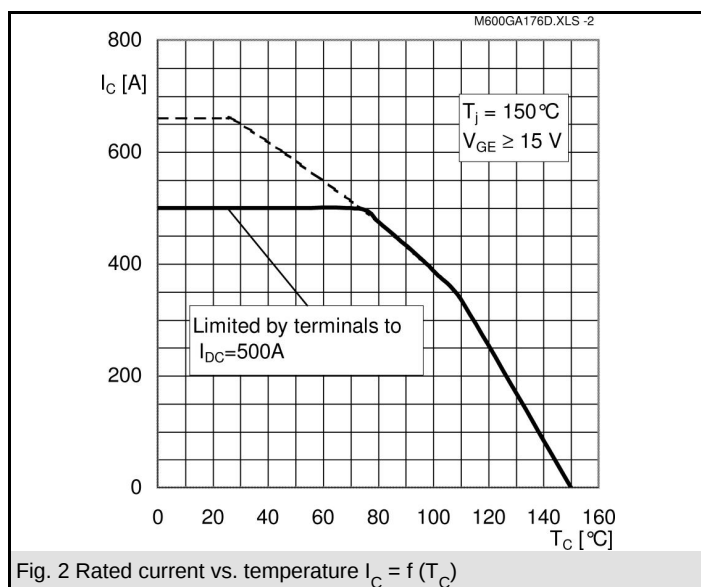


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

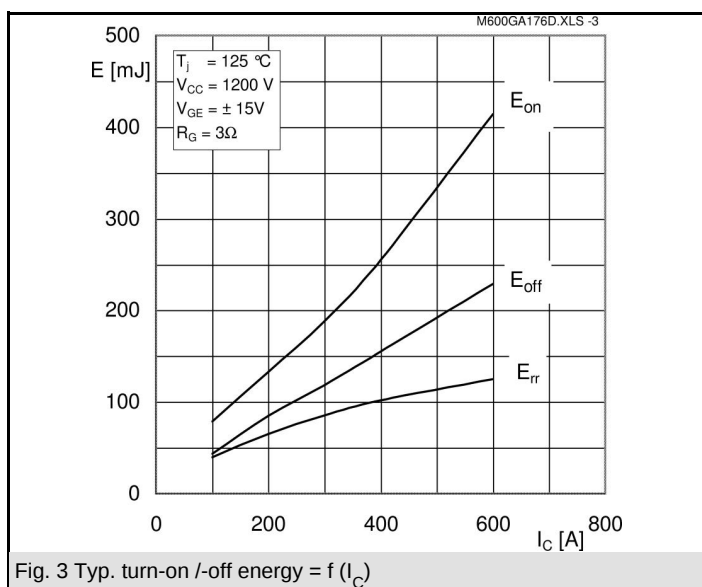


Fig. 3 Typ. turn-on /-off energy = $f(I_C)$

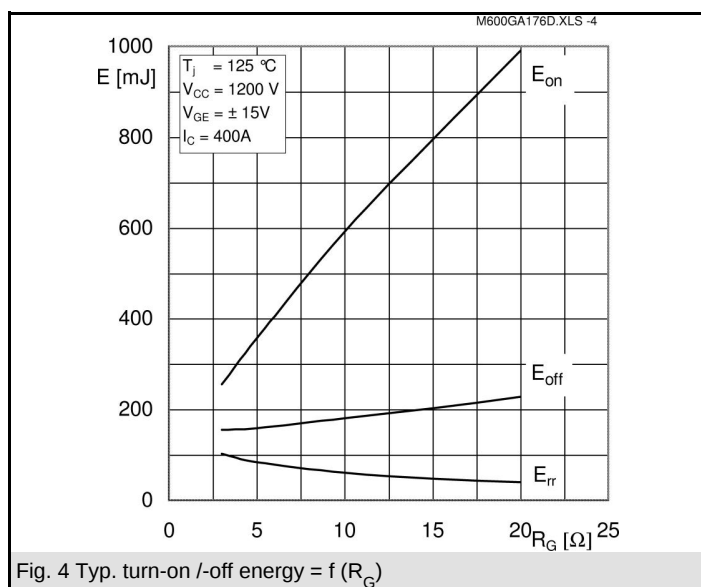


Fig. 4 Typ. turn-on /-off energy = $f(R_G)$

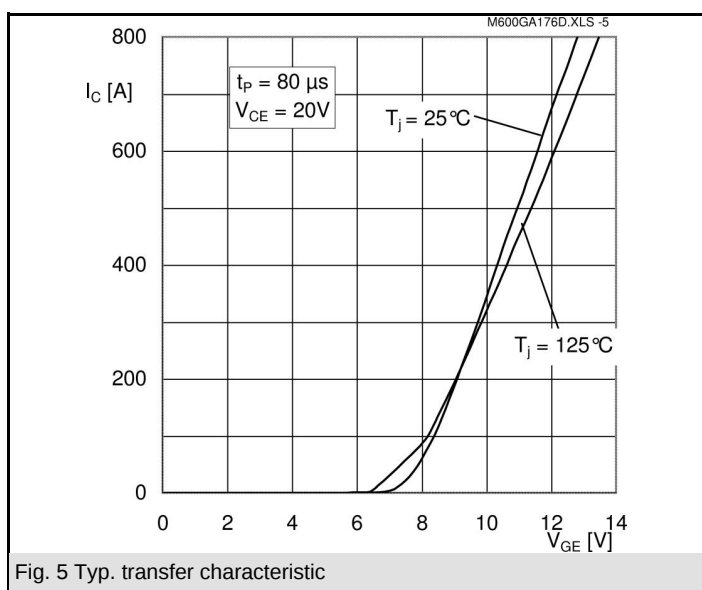


Fig. 5 Typ. transfer characteristic







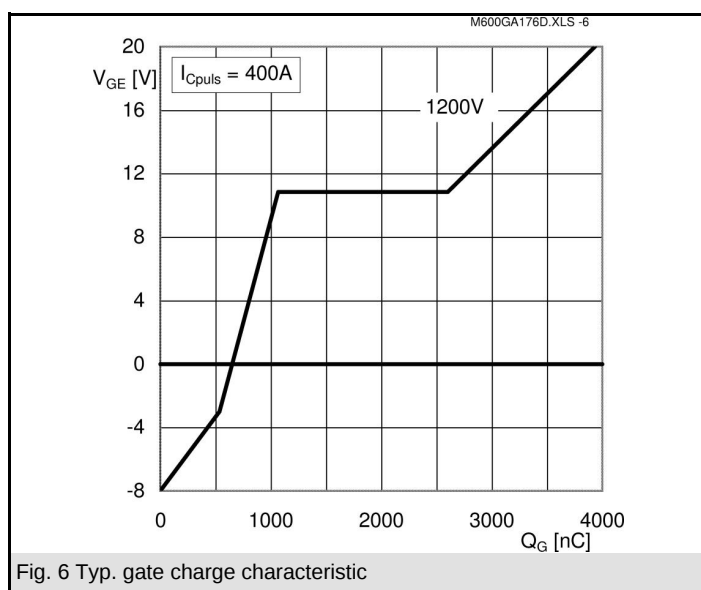


Fig. 6 Typ. gate charge characteristic

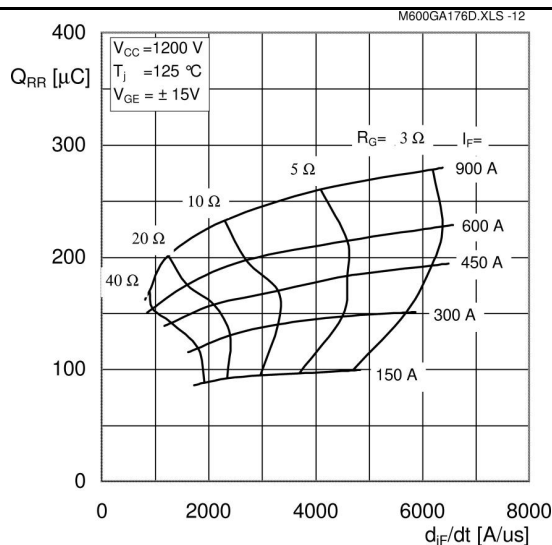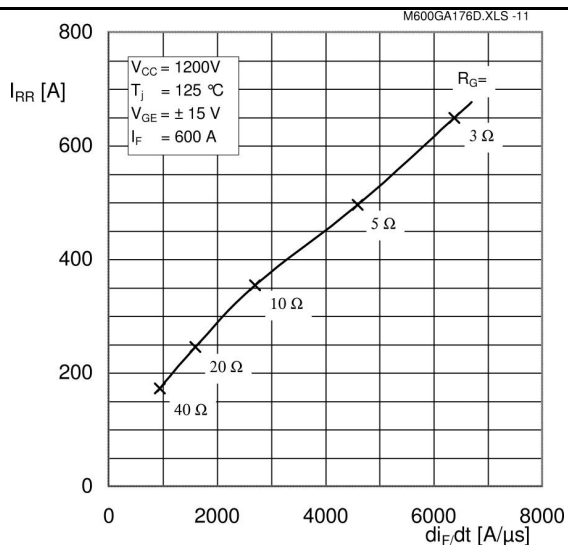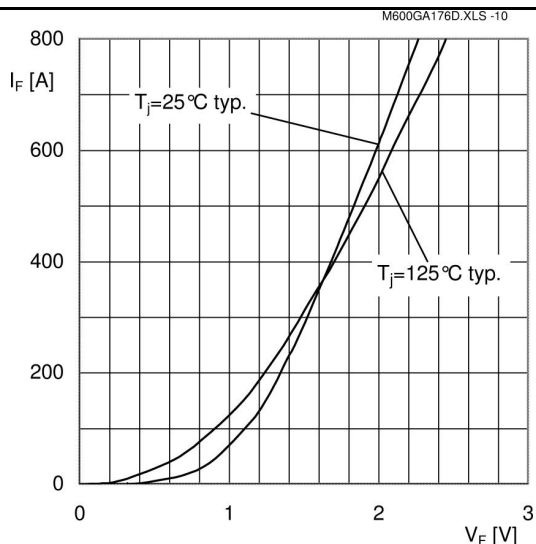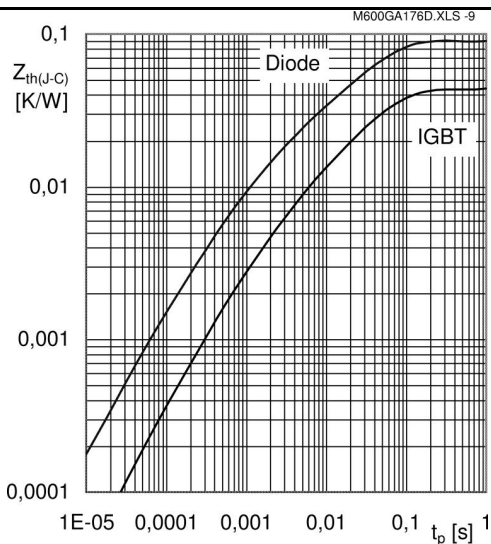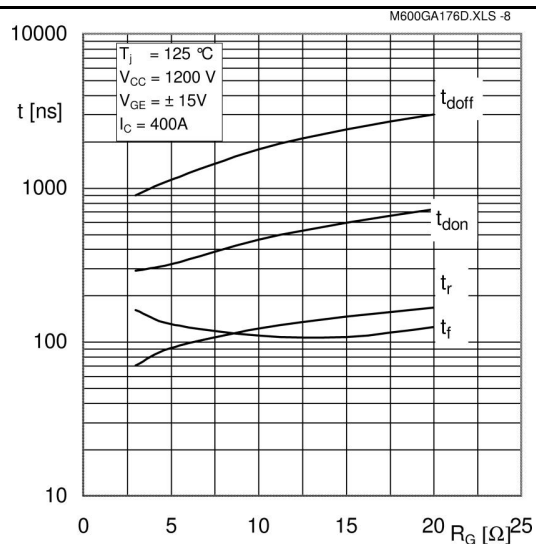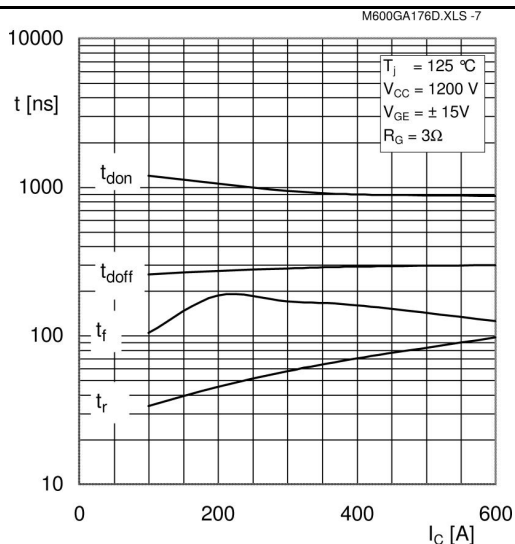


SKM 600GA176D


UL Recognized

CASED59

File no. 63 532

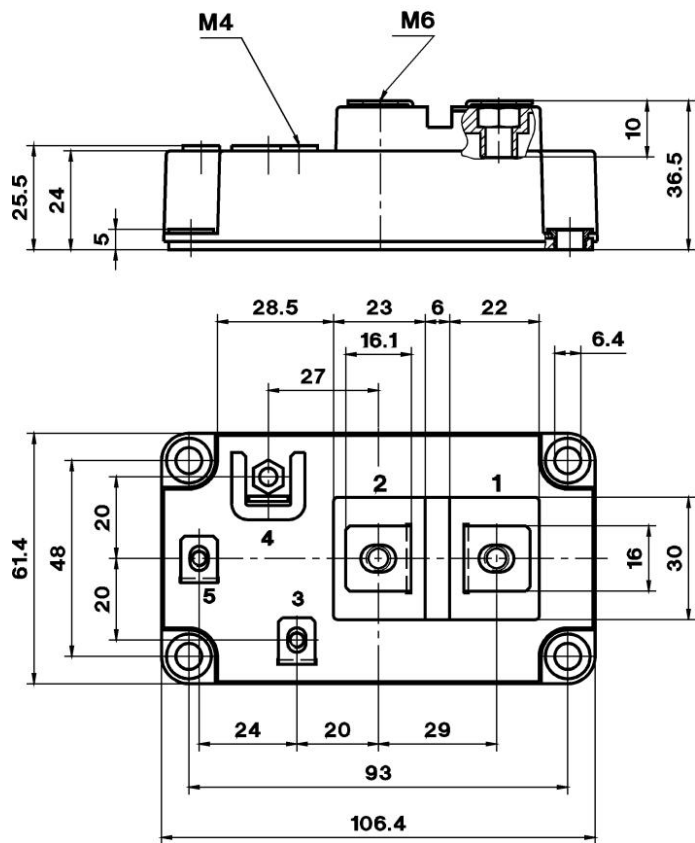

Case D 59

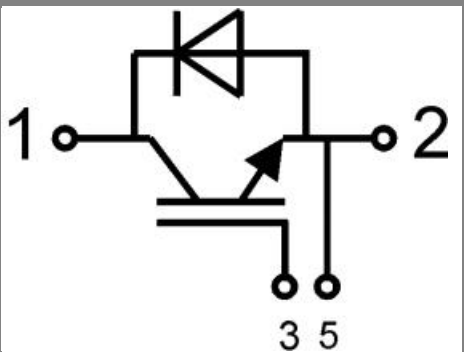

GA

Case D59