

**Description**

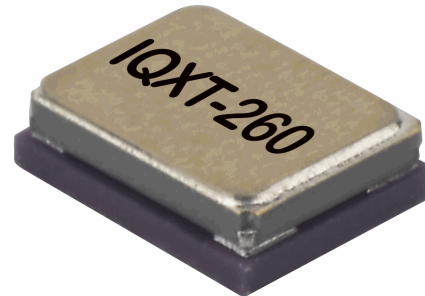
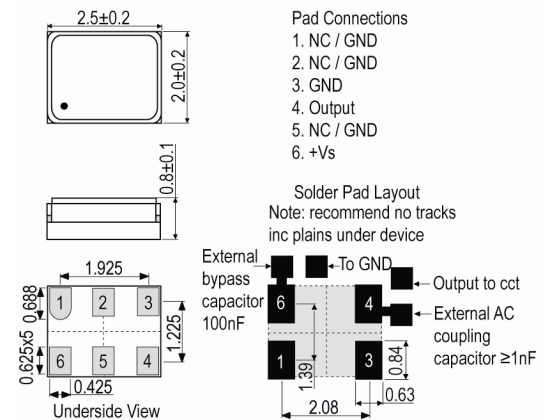
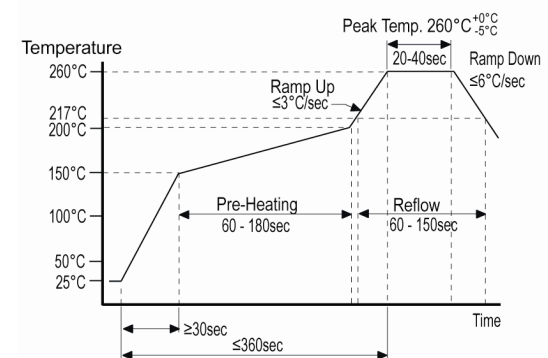
- The IQXT-260-6 employs an analogue ASIC for the oscillator and a high-order temperature compensation circuit in a 2.5 x 2.0mm size package.
- Model IQXT-260-6
- Model Issue number 1

**Frequency Parameters**

- Frequency 26.0MHz
- Frequency Tolerance  $\pm 1.00\text{ppm}$
- Tolerance Condition @ 25°C  $\pm 2^\circ\text{C}$
- Frequency Stability  $\pm 0.50\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Ageing:
  - $\pm 1\text{ppm}$  max over 1yr @ 25°C
  - $\pm 1.5\text{ppm}$  max over 2yrs @ 25°C
  - $\pm 2.5\text{ppm}$  max over 5yrs @ 25°C
  - $\pm 5\text{ppm}$  max over 10yrs @ 25°C
- Frequency Stability: TA varied over -30 to 85°C, measurement referenced to frequency observed with  $F_{\text{ref}} = (F_{\text{max}} + F_{\text{min}})/2$ ,  $V_s = 2.8\text{V}$  and load = 10k $\Omega$ /10pF:  $\pm 0.5\text{ppm}$  max
- Frequency Stability: TA varied over -40 to -30°C, measurement referenced to frequency observed with  $F_{\text{ref}} = (F_{\text{max}} + F_{\text{min}})/2$ ,  $V_s = 2.8\text{V}$  and load = 10k $\Omega$ /10pF:  $\pm 3\text{ppm}$  max
- Frequency Slope (minimum of one frequency reading every 2°C):
  - 20 to 65°C: 0.05ppm/°C max
  - 30 to 85°C: 0.1ppm/°C max
  - 40 to -30°C: 0.35ppm/°C max
- Static Temperature Hysteresis (frequency change after reciprocal temperature ramped over the operating range - frequency measured before and after @ 25°C): 0.6ppm max
- Supply Voltage Variation ( $\pm 5\%$  change @ 25°C):  $\pm 0.1\text{ppm}$  max
- Load Variation ( $\pm 5\%$  change @ 25°C):  $\pm 0.1\text{ppm}$  max
- Reflow Variation (after two consecutive reflows as per profile shown and 1hr recovery @ 25°C):  $\pm 1\text{ppm}$  max
- Root Allan Variance (Tau=1sec): 0.3ppb max
- G Sensitivity (within 30Hz to 1500Hz): 2ppb/G max
- Note: Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents can lead to short term frequency drift.

**Electrical Parameters**

- Supply Voltage 2.8V nominal
- Current Draw 1.50mA
- Supply Voltage Range: 1.7V min to 3.3V max
- Supply Current (@ TA=25°C, Vs max and load=10k $\Omega$ /10pF): 1.5mA max
- Note: Nominal supply voltage applies for all measurements unless otherwise stated.


**Outline (mm)**

**Pb-Free Reflow**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Output Details**

- Output Compatibility                      Clipped Sine
- Drive Capability                          10kΩ//10pF ±10%
- Output Voltage Level (@ TA=25°C, Vs min and load=10kΩ//10pF): 0.8V pk-pk min
- Start Up Time (amplitude within 90% of specified output level): 2ms max
- Start Up Time (frequency within ±0.5ppm of steady state frequency): 2ms max
- Output: DC coupled
- Note: AC-coupled output requires an external capacitor, ≥1nF recommended.

**Noise Parameters**

- Phase Noise @ 25°C (typ):
  - 62dBc/Hz @ 1Hz
  - 91dBc/Hz @ 10Hz
  - 115dBc/Hz @ 100Hz
  - 136dBc/Hz @ 1kHz
  - 150dBc/Hz @ 10kHz
  - 152dBc/Hz @ 100kHz
- Harmonics: -8dBc max

**Environmental Parameters**

- Storage Temperature Range: -40 to 85°C
- Shock: MIL-STD-202 M213: Half sine wave acceleration of 3000G peak amplitude, duration 0.3ms, velocity 12.3ft/s.
- Vibration: JESD22-B103-B: 10G peak acceleration for 20mins, 12 cycles in each of the 3 orientations, tested from 10-2000Hz.
- Moisture Resistance: MIL-STD-202 M106g: 1000hrs @ 85°C, 85% RH, biased.
- Thermal Cycling: JESD22 Method JA-104C: 1000 temperature cycles, where each cycle consists of a 25mins soak time @ -40°C followed by a 25mins soak time @ 85°C, with a 60secs maximum transition time between temperatures, air to air transition.
- Note: Frequency shift ≤1ppm after environmental conditions.

**Manufacturing Details**

- Maximum Process Temperature: 260°C (40secs max)

**Compliance**

- RoHS Status (2011/65/EU)              Compliant
- REACH Status                                Compliant
- MSL Rating (JEDEC-STD-033):        Not Applicable

**Packaging Details**

- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 3,000
- *Alternative packing option available*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)