

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT BY SHANGHAI SHIDI TECHNOLOGY INC.

LOC DIST

REVISIONS

P LTR

DESCRIPTION

DATE

DWN


APVD

1.0 PERFORMANCE

- 1.1 OPERATING FREQUENCY: 0-12GHz
1.2 VSWR: <1.3
1.4 TEMPERATURE RANGE: -65°C TO +165°C
1.5 NOMINAL IMPEDANCE: 50 OHMS
1.6 DURABILITY: ≥500 matings

2.0 MATERIALS


- 2.1 DIELECTRIC: PTFE
2.2 CENTER CONTACT: BE-BROZE
2.3 BODY: BRASS
3.0 FINISHES
3.1 CENTER CONTACT: GOLD PLATED
3.2 BODY: GOLD FLASH
4.0 THE CONNECTOR IS ROHS COMPLIANT.

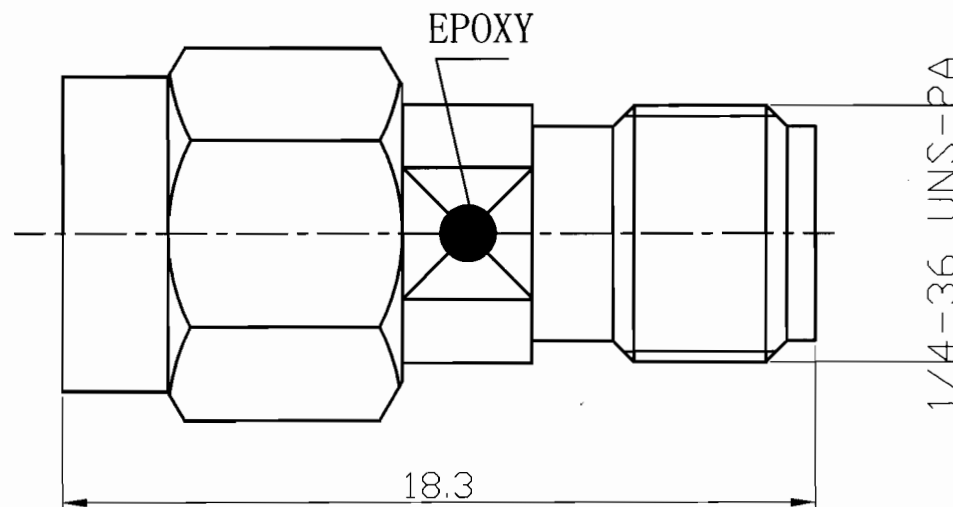

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ± -
1 PLC ± 0.15
2 PLC ± 0.1
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN 09-06-2011

CHK

09-06-2011

YH

APVD

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

SHANGHAI SHIDI TECHNOLOGY INC.

SMA MALE TO SMA FEMALE ADAPTOR
50 OHM

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

20551-0

SCALE

SHEET

1 OF 1

REV 0