



Fast Diode Modules

SKKE 600F

Features

- CAL (controlled axial lifetime) technology, patent No. 43 10 44
- Heat transfer through aluminium oxide DCB ceramic isolated metal baseplate
- Small recovered charge
- Fast & soft recovery CAL diodes
- UL recognized, file no. E 63 532







Typical Applications


- Freewheeling diodes for IGBT
- Freewheeling diode for inductive loads
- Brake choppers
- Inverters and DC choppers
- AC motor control
- Boost choppers
- up to 20 kHz

V_{RSM} V	V_{RRM} V	$I_{FRMS} = 450\text{ A}$ (maximum value for continuous operation) $I_{FAV} = 360\text{ A}$ (sin. 180; 50 Hz; $T_c = 85\text{ }^{\circ}\text{C}$)	
1200	1200	SKKE 600F12	

Symbol	Conditions	Values	Units
I_{FAV}	sin. 180; $T_c = 85\text{ (100) }^{\circ}\text{C}$	360 (305)	A
I_{FSM}	$T_{vj} = 25\text{ }^{\circ}\text{C}; 10\text{ ms}$ $T_{vj} = 150\text{ }^{\circ}\text{C}; 10\text{ ms}$	7000 5800	A A
i^2t	$T_{vj} = 25\text{ }^{\circ}\text{C}; 8,3 \dots 10\text{ ms}$ $T_{vj} = 150\text{ }^{\circ}\text{C}; 8,3 \dots 10\text{ ms}$	245000 168000	A ² s A ² s
V_F	$T_{vj} = 25\text{ }^{\circ}\text{C}; I_F = 600\text{ A}$	max. 2,5	V
$V_{(TO)}$	$T_{vj} = 150\text{ }^{\circ}\text{C}$	max. 1,2	V
r_T	$T_{vj} = 150\text{ }^{\circ}\text{C}$	max. 1,9	mΩ
I_{RD}	$T_{vj} = 25\text{ }^{\circ}\text{C}; V_{RD} = V_{RRM}$	max. 4	mA
I_{RD}	$T_{vj} = 150\text{ }^{\circ}\text{C}; V_{RD} = V_{RRM}$	max. 30	mA
Q_{rr}	$T_{vj} = 150\text{ }^{\circ}\text{C}; I_F = 600\text{ A},$ $-di/dt = 4000\text{ A}/\mu\text{s}, V_R = 600\text{ V}$	80	μC
I_{RM}		280	A
t_{rr}		780	ns
E_{rr}		21	mJ
$R_{th(j-c)}$	DC	0,062	K/W
$R_{th(c-s)}$		0,038	K/W
T_{vj}		- 40 ... + 150	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1s / 1 min.	4800 / 4000	V~
M_s	to heatsink	3 ... 5	Nm
M_t	to terminals	2,5 ... 5	Nm
a		5 * 9,81	m/s ²
m	approx.	330	g
Case	SEMITRANS 4	A 68	



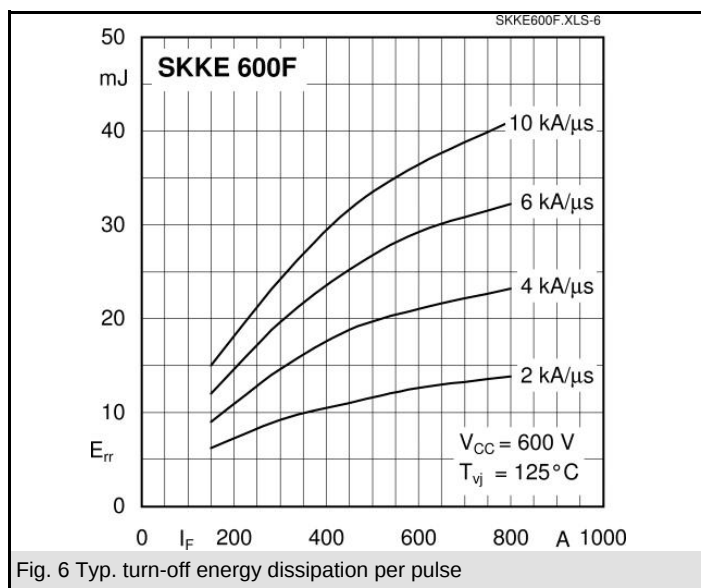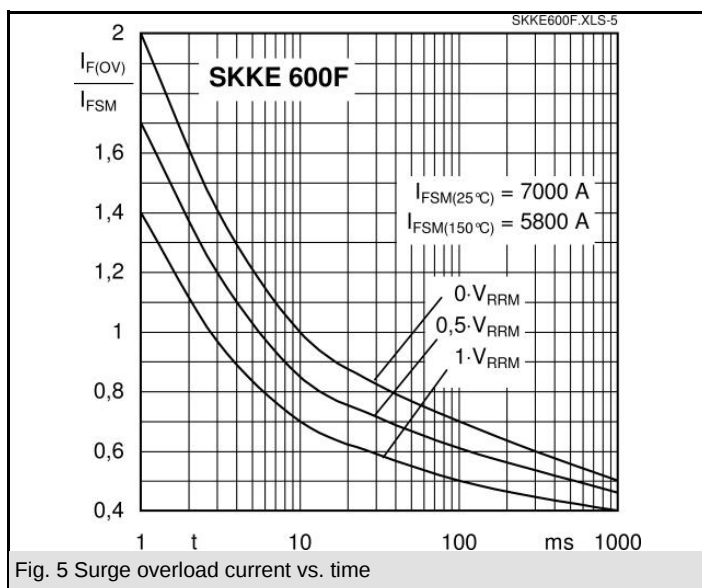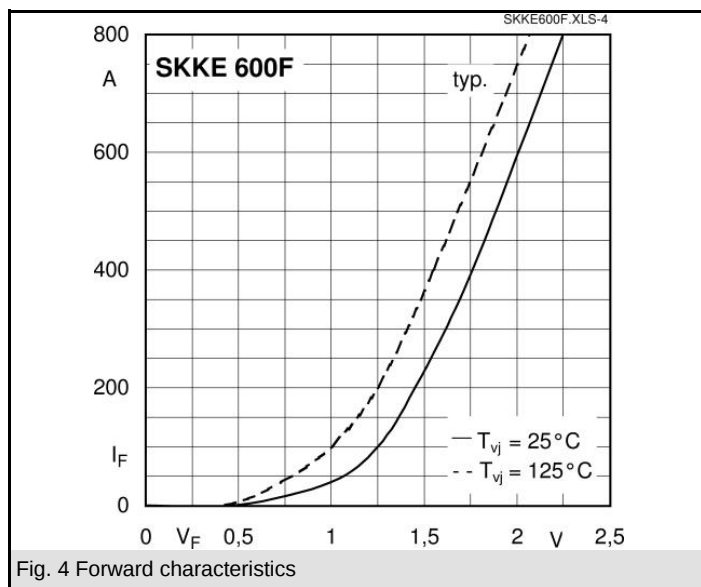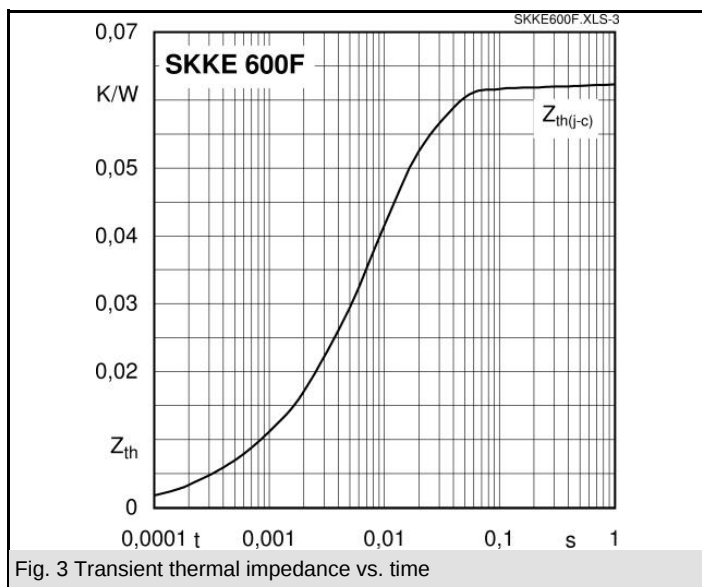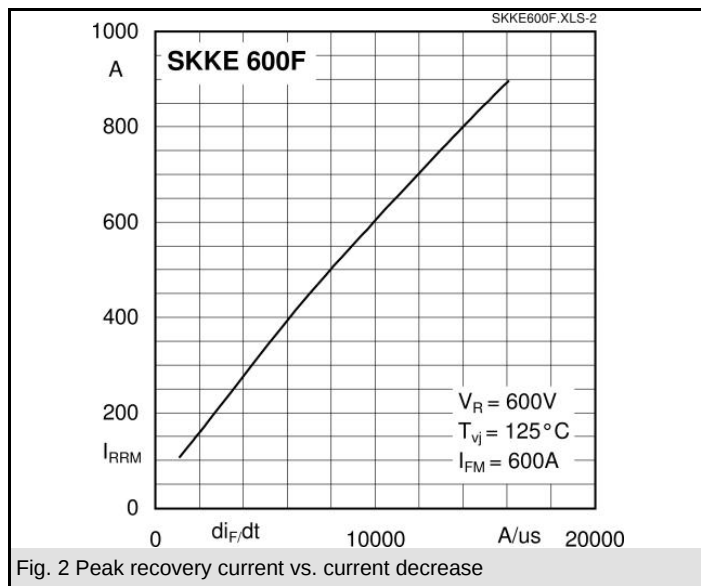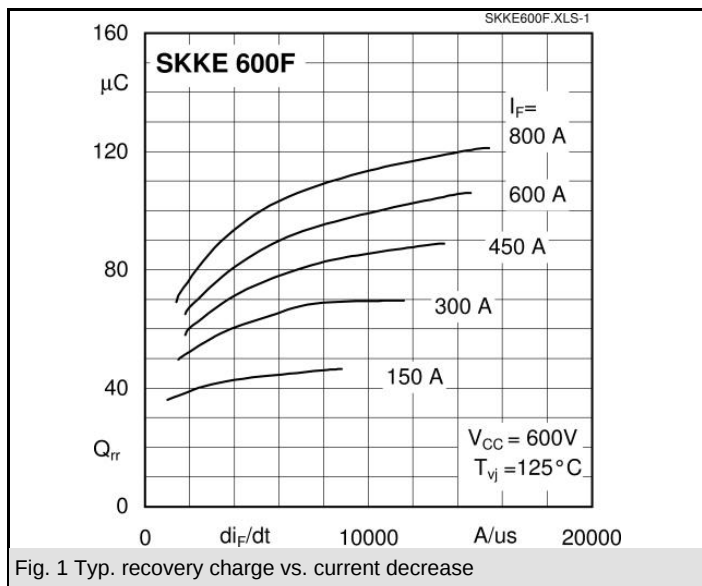

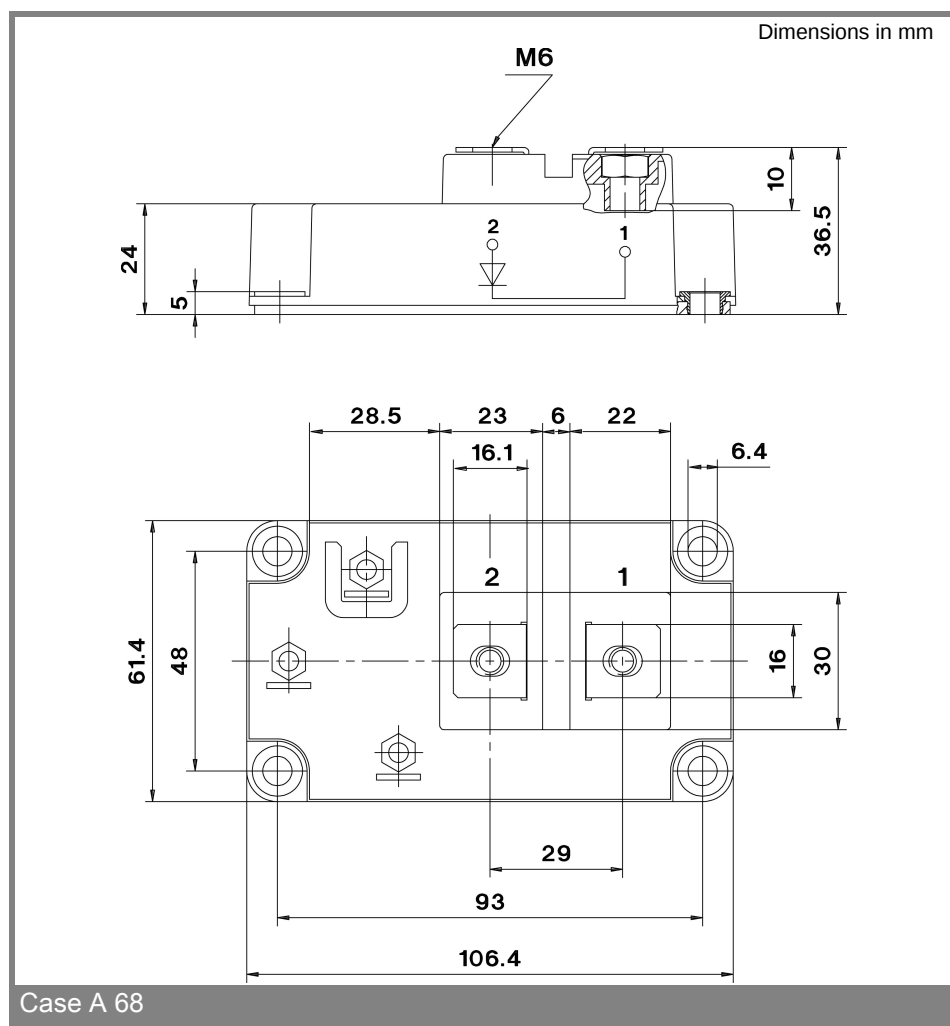

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.