

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY SHANGHAI SHIDI TECHNOLOGY INC.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTY

DESCRIPTION


DATE

DWN

APVD

- 1.0 PERFORMANCE
1.1 FREQUENCY RANGE: DC-3GHZ
1.2 DWV: 335V RMS
1.3 TEMPERATURE RANGE: -65° C TO +155° C
1.4 IMPEDANCE: 50 OHMS
1.5 INSULATION RESISTANCE: 5000M OHMS
1.6 VSWR<1.3

- 2.0 MATERIALS
2.1 DIELECTRIC: PTFE
2.2 CENTER CONTACT: BeCu/BRASS
2.3 BODY: BRASS
3.0 FINISHES
3.1 CENTER CONTACT: GOLD PLATED
3.2 BODY: GOLD PLATED
4.0 THE CONNECTOR IS ROHS COMPLIANT

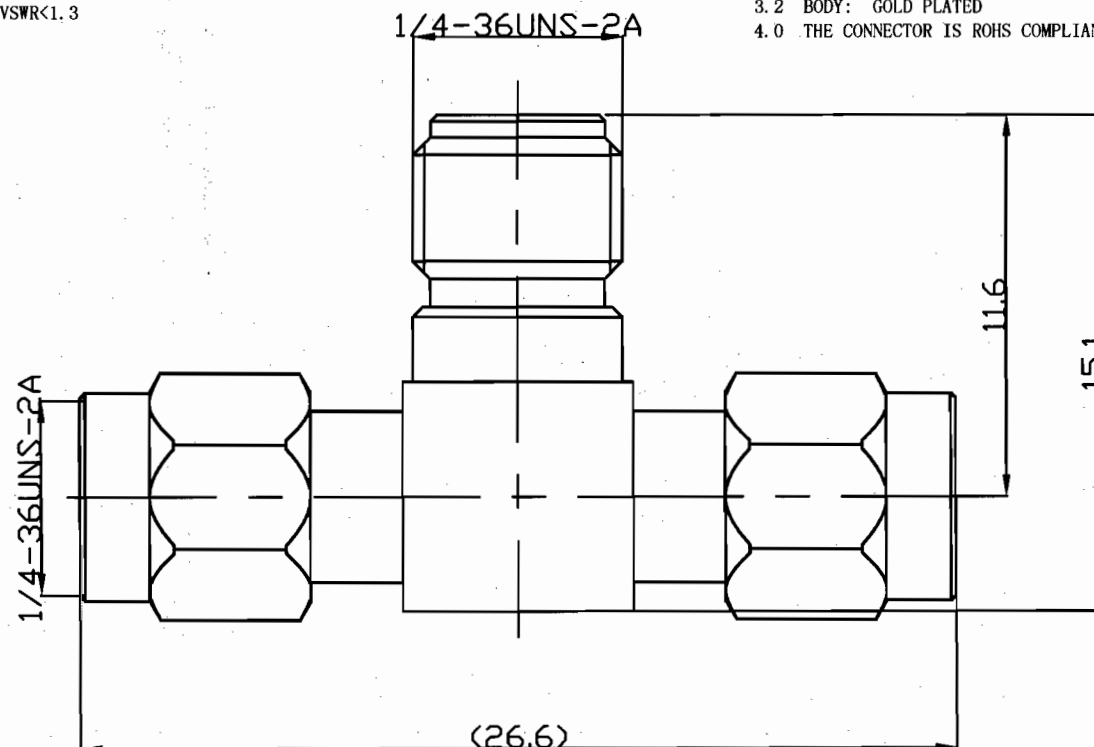

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

- 0 PLC ± 0.1
1 PLC ± 0.1
2 PLC ± 0.05
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH

DWN 17-01-2014

Rebecca

CHK 17-01-2014

DAVID

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

NAME

SHANGHAI SHIDI TECHNOLOGY INC.

T Adapter
SMA M-M-F

SIZE A3

CAGE CODE

DRAWING NO

C-210-210-220-01

RESTRICTED TO

SCALE

SHEET

1 OF 1

REV 0