

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY SHANGHAI SHIDI TECHNOLOGY INC.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P LTR

DESCRIPTION

DATE


DIN

APVD

- 1.0 PERFORMANCE
1.1 FREQUENCY RANGE: DC-3GHZ
1.2 VSWR: < 1.3
1.3 TEMPERATURE RANGE: -65° C TO +165° C
1.4 IMPEDANCE: 50 OHMS

- 2.0 MATERIALS
2.1 DIELECTRIC: PTFE
2.2 BODY: BRASS
2.3 CENTER CONTACT: BeCu

- 3.0 FINISHES
3.1 BODY: GOLD PLATING
3.2 CENTER CONTACT: GOLD PLATING
4.0 THE CONNECTOR IS ROHS COMPLIANT.

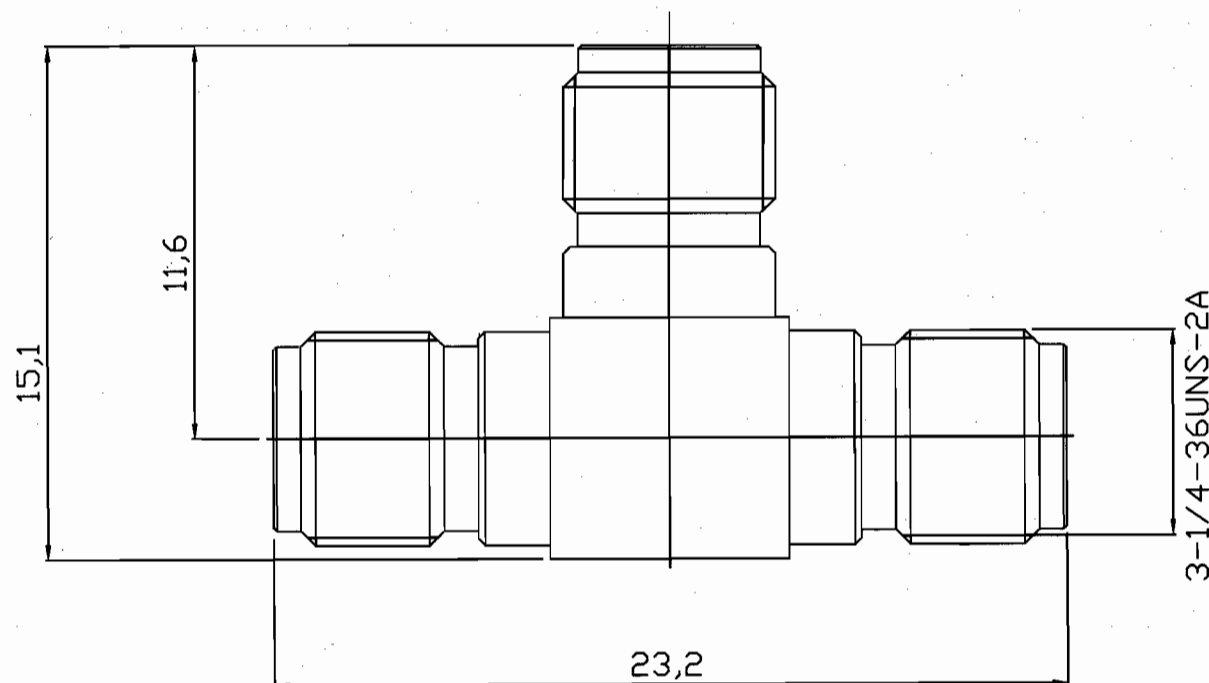

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN 2014-1-17

LOW

CHK

2014-1-17

DAVID

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SHANGHAI SHIDI TECHNOLOGY INC.

ADAPTOR SMA JACK / SMA JACK/SMA JACK

A3

C-220-220-220-01


SCALE 3:1

SHEET 1 OF 1

REV 1

DIMENSIONS:

INCHES



TOLERANCES UNLESS

OTHERWISE SPECIFIED:

- 0 PLC ± -
1 PLC ± -.039
2 PLC ± -
3 PLC ± -.005
4 PLC ± -
ANGLES ± -

MATERIAL

FINISH