

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY SHANGHAI SHIDI TECHNOLOGY INC.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P


LTR

DESCRIPTION

DATE

DWN

APVD

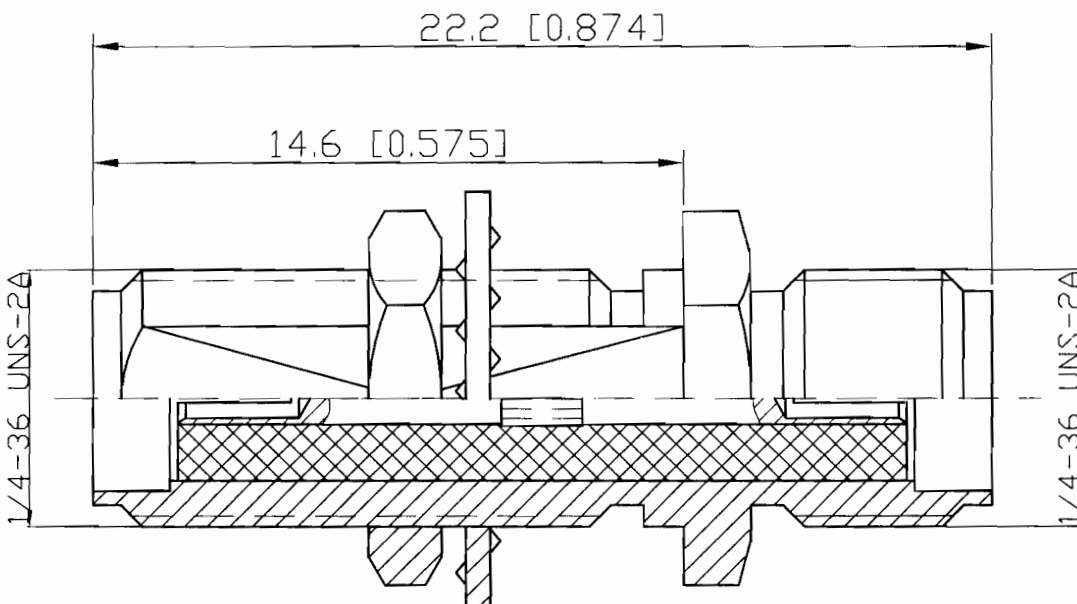

- 1.0 PERFORMANCE
1.1 FREQUENCY RANGE: DC-18GHZ
1.2 DWV: 1000 RMS
1.3 TEMPERATURE RANGE: -65° C TO +165° C
1.4 IMPEDANCE: 50 OHMS
1.5 INSULATION RESISTANCE: 5000M OHMS

- 2.0 MATERIALS
2.1 DIELECTRIC: PTFE
2.2 BODY: BRASS
2.3 CENTER CONTACT: BERYLLIUM BRONZE

- 3.0 FINISHES
3.1 CONNECTOR BODY: NICKEL PLATED
3.2 CENTER CONTACT: GOLD PLATING

- 4.0 THE CONNECTOR IS ROHS COMPLIANT.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN STEVEN 2009-6-22

CHK DAVID 2009-6-22

APVD

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

C-22553-3

SCALE 8:1

SHEET

OF 1

REV 1

DIMENSIONS:
INCHESTOLERANCES UNLESS
OTHERWISE SPECIFIED:

- 0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±-005
4 PLC ±
ANGLES ±

MATERIAL

FINISH