
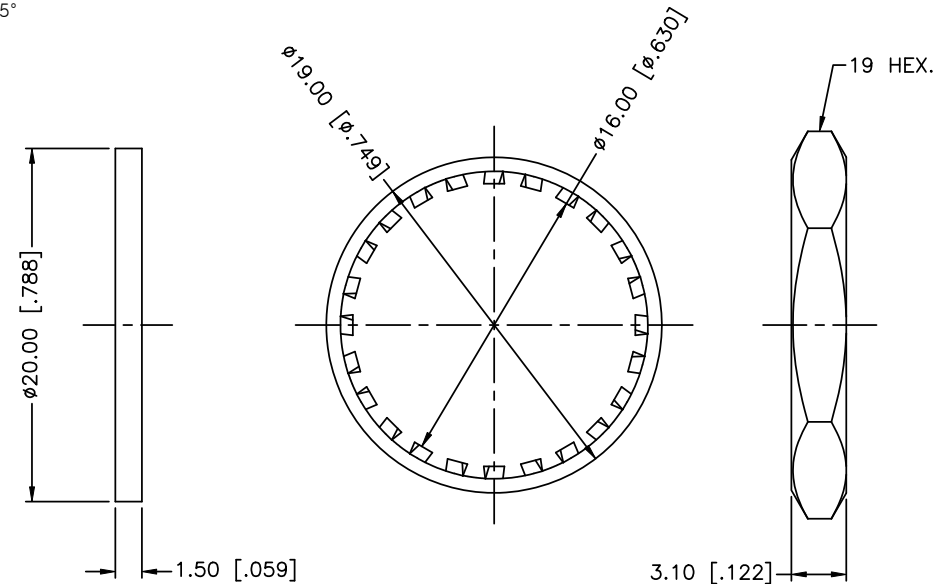
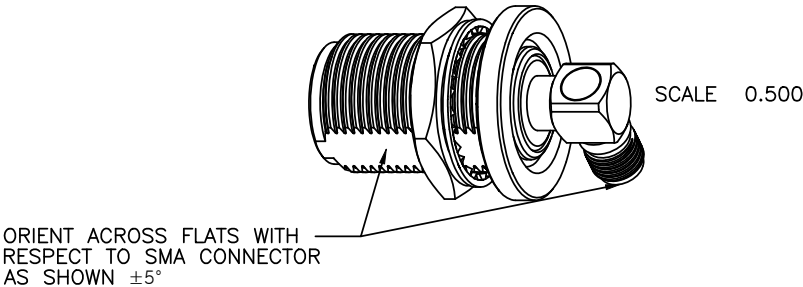


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/12/11	XXXXXX	INITIAL RELEASE
A	06/23/11	2189	ADDED ±5° TOLERANCE FOR THE PARALLELISM OF THE SMA AND THE FLATS OF THE N CONNECTOR

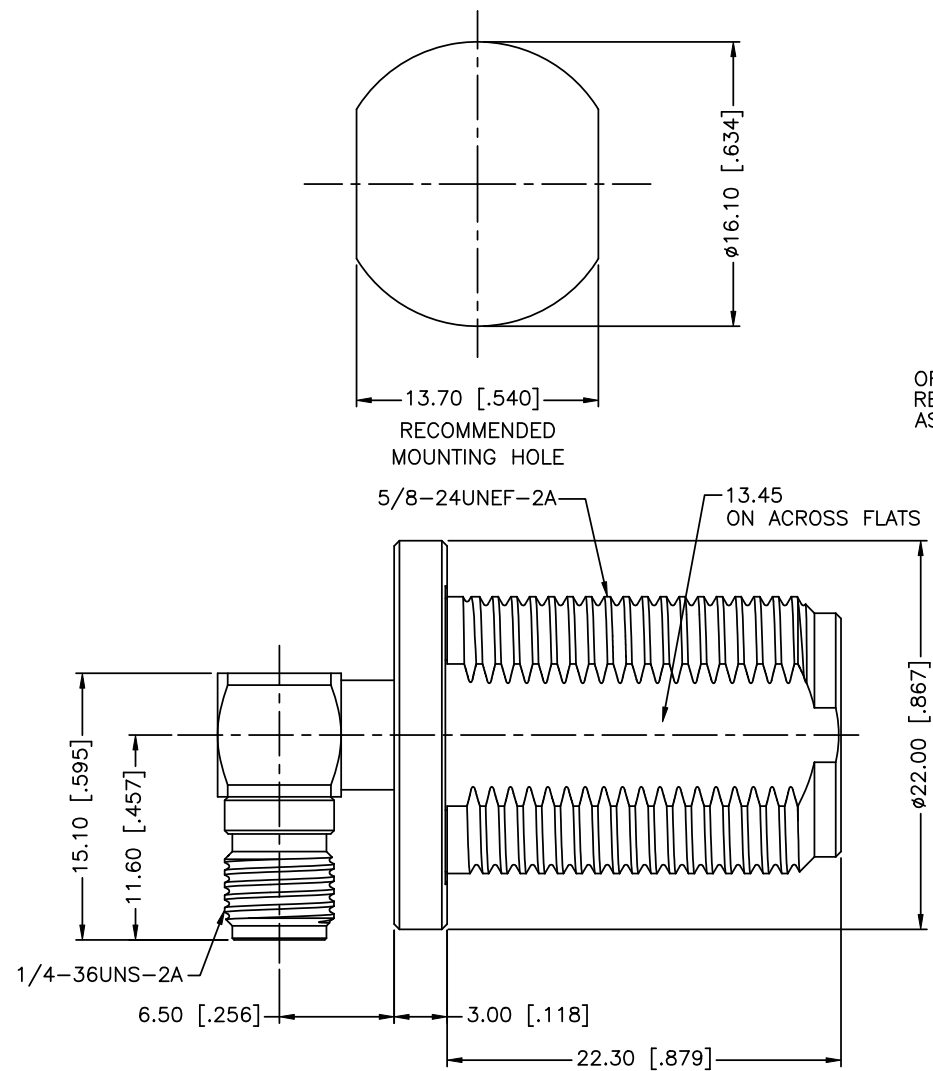

1. MAX. PANEL THICKNESS= 6.8mm

9	COVER	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8	HEX NUT	BRASS	NICKEL	1		DRAWN	T.DENG	06/23/11								
7	LOCK WASHER	BRASS	NICKEL	1		CHECKED										
6	GASKET	SILICONE	RED	1		ISSUED			PART DESCRIPTION							
5	BODY	BRASS	NICKEL	1		SHEET	1 OF 1		N BULKHEAD JACK TO SMA RIGHT ANGLE JACK ADAPTOR							
4	CONTACT PIN	BER. COPPER	GOLD	1				PART NO.								
3	O—RING	SILICONE	RED	1				242253								
2	INSULATOR	PTFE	NATURAL	1				DWG. NO.								
1	HOUSING	BRASS	NICKEL	1				242253.DWG								
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE		C:/CONNEX/242253.DWG		REV.	A	SIZE	A	SCALE