



SEMIPACK® 2

Rectifier Diode Modules

SKKD 212

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability

Typical Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

V_{RSM} V	V_{RRM} V	$I_{FRMS} = 340\text{ A}$ (maximum value for continuous operation) $I_{FAV} = 212\text{ A}$ (sin. 180; $T_c = 85\text{ °C}$)		
1300	1200	SKKD 212/12		
1700	1600	SKKD 212/16		
1900	1800	SKKD 212/18		

Symbol	Conditions	Values	Units
I_{FAV}	sin. 180; $T_c = 85\text{ (100) °C}$	212 (165)	A
I_{FSM}	$T_{vj} = 25\text{ °C}$; 10 ms $T_{vj} = 125\text{ °C}$; 10 ms	6600 5500	A A
i^2t	$T_{vj} = 25\text{ °C}$; 8,3 ... 10 ms $T_{vj} = 125\text{ °C}$; 8,3 ... 10 ms	217800 151250	A²s A²s
V_F $V_{(TO)}$ r_T I_{RD}	$T_{vj} = 25\text{ °C}$; $I_F = 500\text{ A}$ $T_{vj} = 135\text{ °C}$ $T_{vj} = 135\text{ °C}$ $T_{vj} = 135\text{ °C}$; $V_{RD} = V_{RRM}$	max. 1,4 max. 0,75 max. 1,05 max. 9	V V mΩ mA
$R_{th(j-c)}$ $R_{th(c-s)}$ T_{vj} T_{stg}	per diode / per module per diode / per module - 40 ... + 135 - 40 ... + 135	0,18 / 0,09 0,1 / 0,05 - 40 ... + 135 - 40 ... + 135	K/W K/W °C °C
V_{isol} M_s M_t a m	a. c. 50 Hz; r.m.s.; 1 s / 1 min. to heatsink to terminals approx.	3600 / 3000 5 ± 15 % 5 ± 15 % 5 * 9,81 165	V~ Nm Nm m/s² g
Case	SKKD	A 23	



SKKD

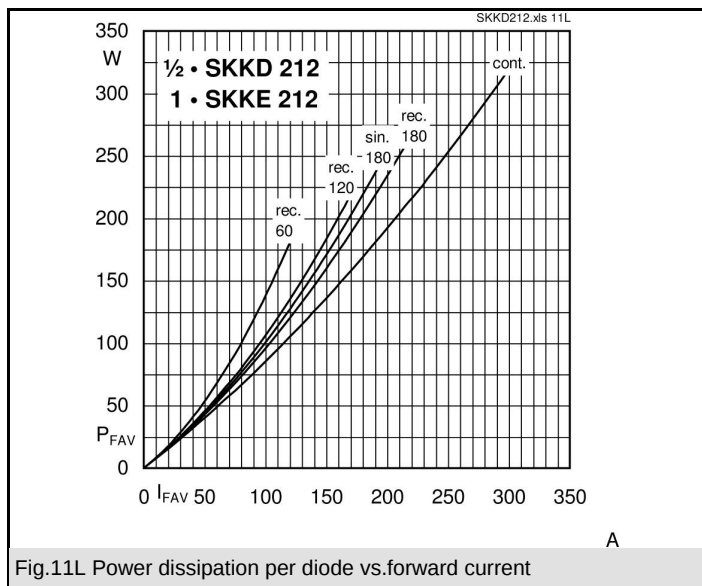


Fig.11L Power dissipation per diode vs. forward current

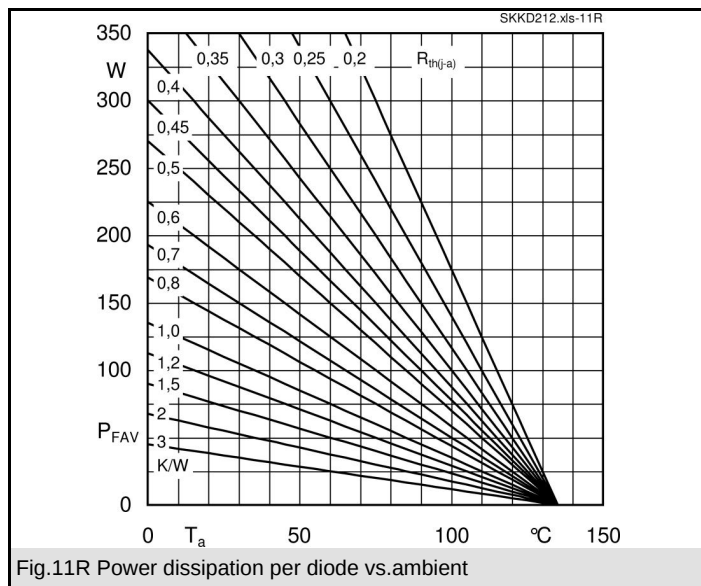


Fig.11R Power dissipation per diode vs. ambient

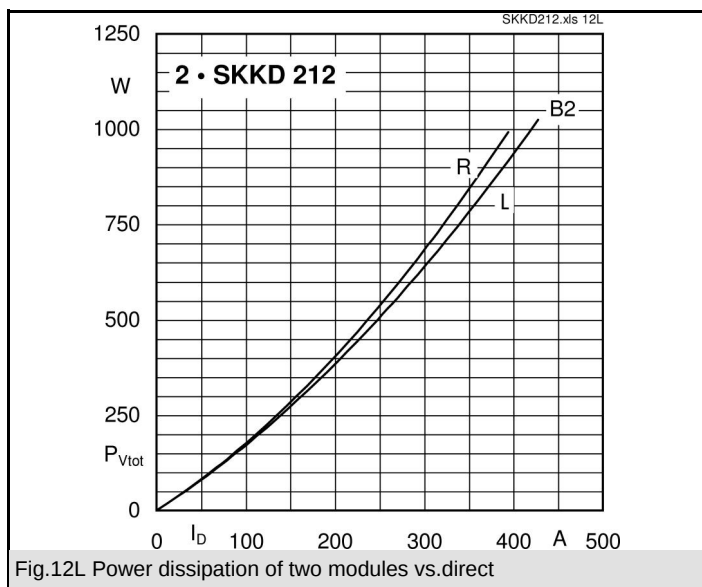


Fig.12L Power dissipation of two modules vs. direct

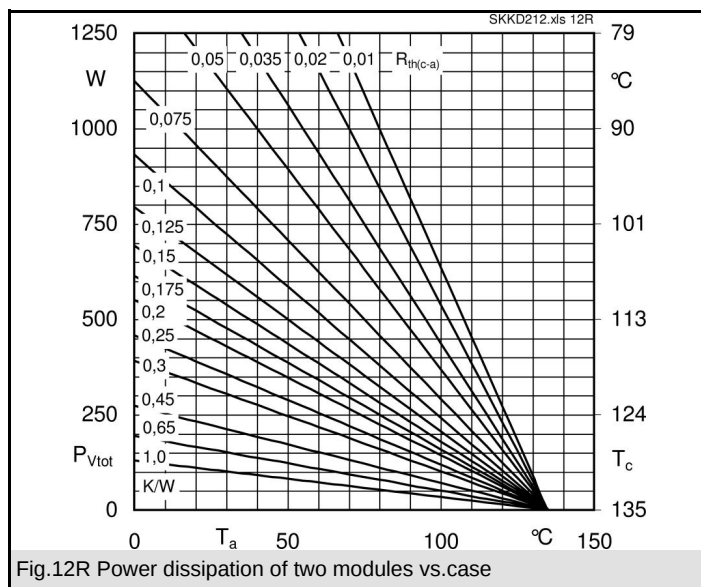


Fig.12R Power dissipation of two modules vs. case

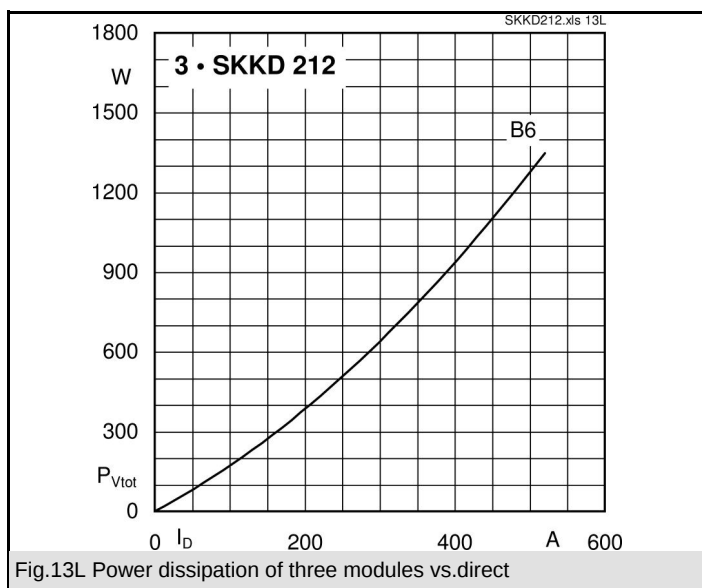


Fig.13L Power dissipation of three modules vs. direct





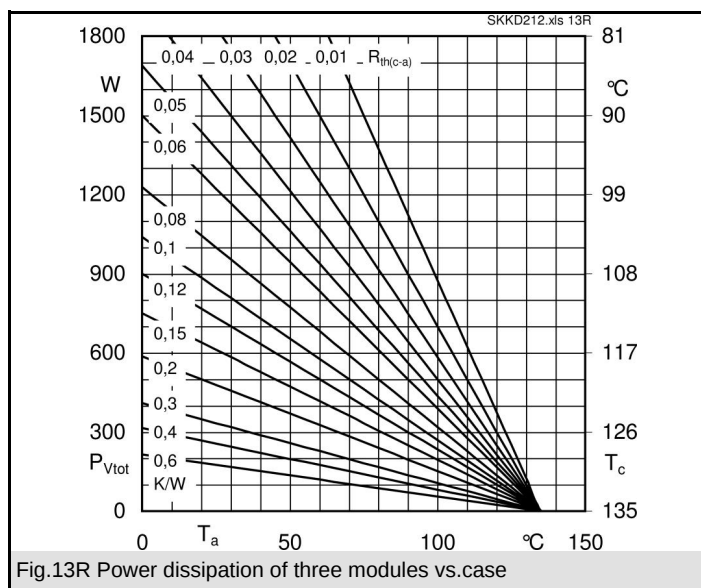


Fig.13R Power dissipation of three modules vs. case

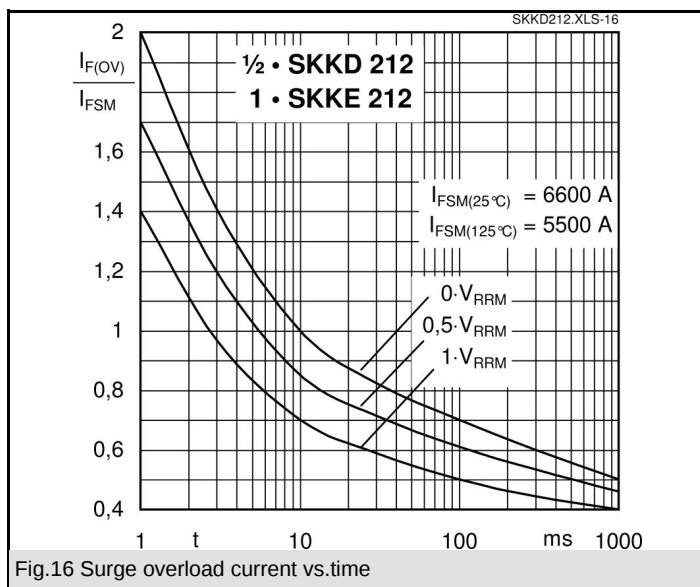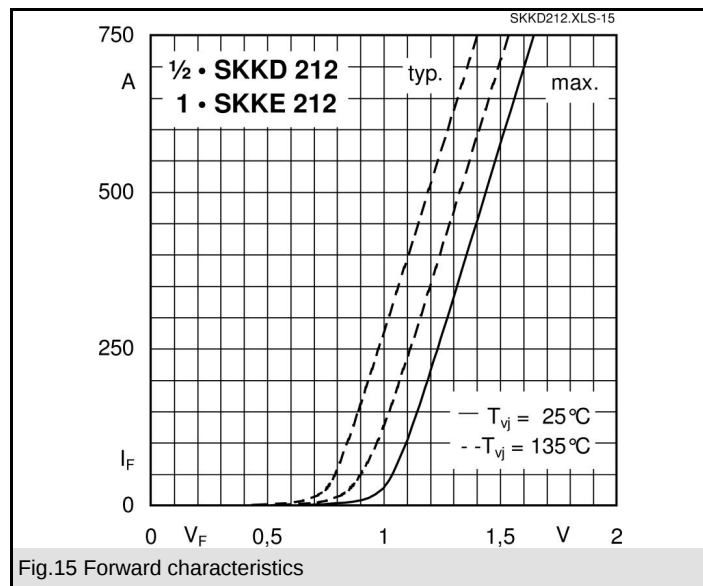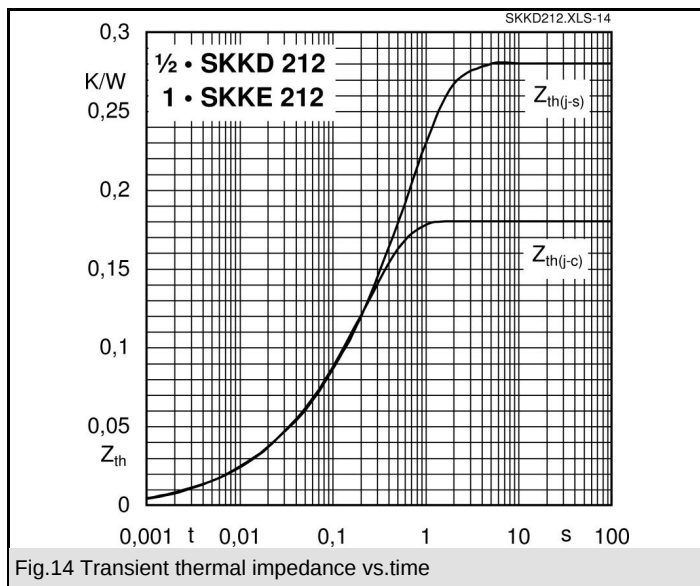

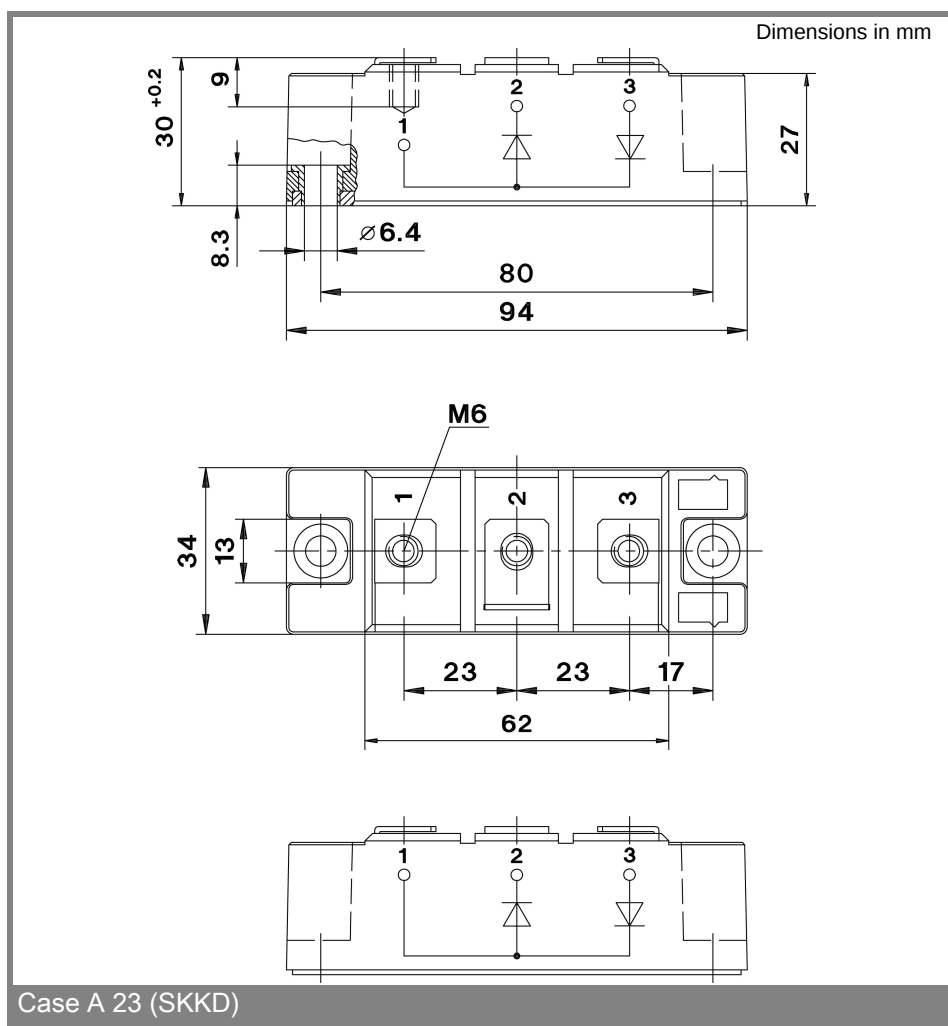

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.