

DATASHEET

2.4mm(F) to 2.4mm(F) 4 Hole Adapter

Product Name

1. 2P4F4H-2P4F-001





2.4mm(F) to 2.4mm(F) 4 Hole Adapter

Document No.	CRD-DS-2251-04
Date / Rev.	01.Jun.2023 / 1
Confidential level	N/A

1. Product

1-1. 2.4mm(F) to 2.4mm(F) 4 Hole Adapter
(P/N : 2P4F4H-2P4F-001)

2. Specifications

2-1. Material

Body : Stainless Steel, Passivated
Center Conductor : BeCu, Au Plated
Insulator : PS

2-2. Environmental

Operating Temperature : -50°C to 100°C

2-3. Electrical

Impedance : 50Ω Typ.
Operating Freq. : DC to 50GHz
VSWR : 1.20 : 1 @50GHz Typ.
1.25 : 1 @50GHz Max.
Insertion Loss : -0.04dB x $\sqrt{f}$




2.4mm(F) to 2.4mm(F) 4 Hole Adapter

Document No.	CRD-DS-2251-04
Date / Rev.	01.Jun.2023 / 1
Confidential level	N/A

3. Drawing

3-1. 2.4mm(F) to 2.4mm(F) 4 Hole Adapter

(P/N : 2P4F4H-2P4F-001)

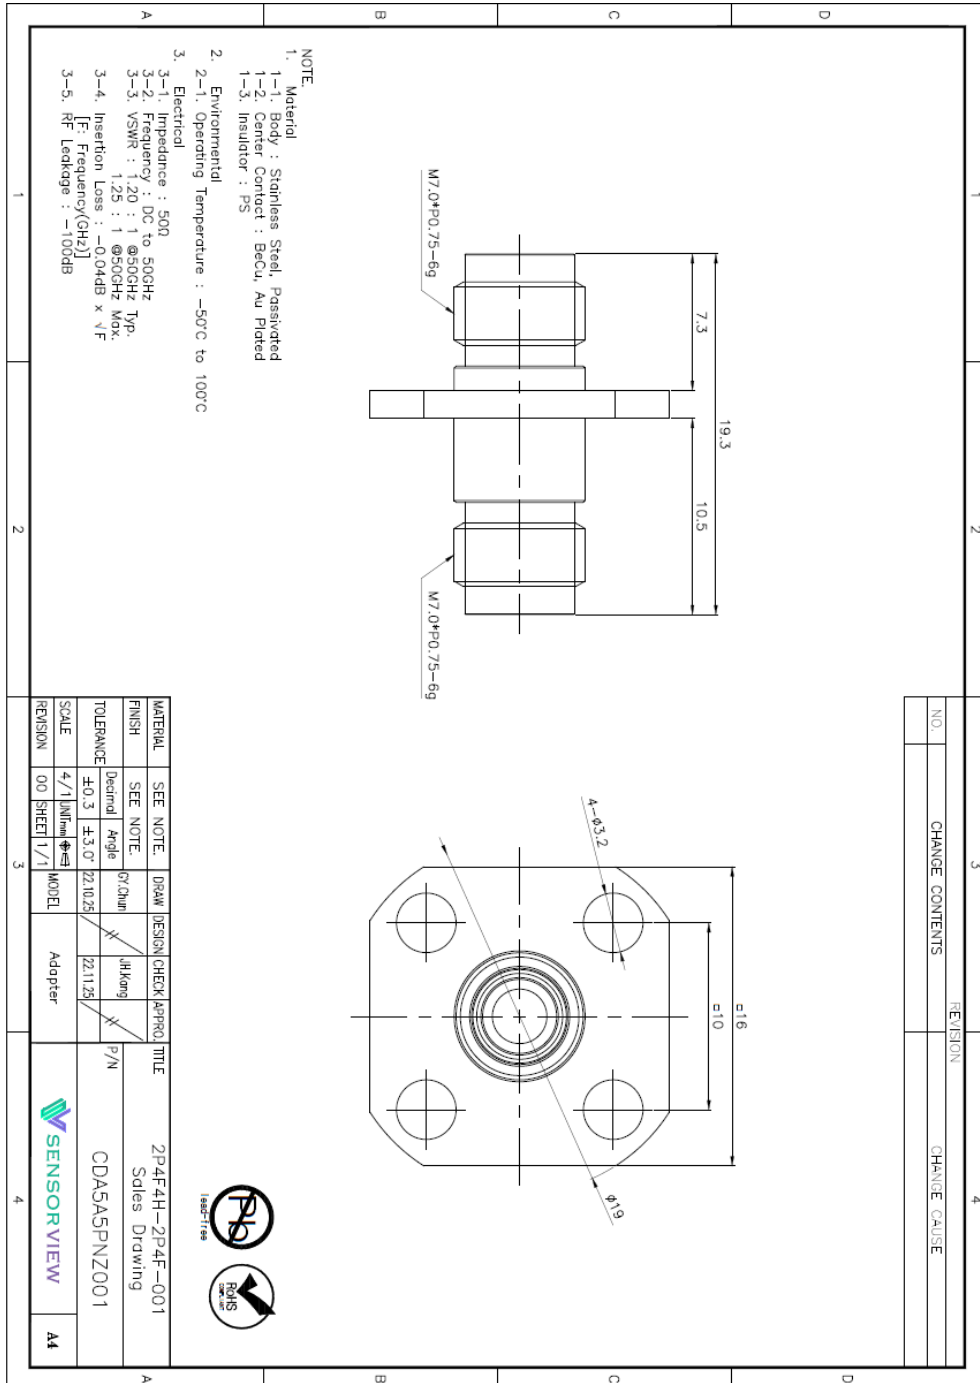



2.4mm(F) to 2.4mm(F) 4 Hole Adapter

Document No.	CRD-DS-2251-04
Date / Rev.	01.Jun.2023 / 1
Confidential level	N/A

4. Data

4-1. 2.4mm(F) to 2.4mm(F) 4 Hole Adapter

(P/N : 2P4F4H-2P4F-001)

