

DATASHEET

2P4(F) to 2P92(F) NMD Adapter

Product Name

1. 2P4FNM-2P92F-002





2P4(F) to 2P92(F) NMD Adapter

Document No.	CRD-DS-2306-02
Date / Rev.	07.Feb.2023 / 0
Confidential level	N/A

1. Product

1-1. 2P4(F) to 2P92(F) NMD Adapter

(P/N : 2P4FNM-2P92F-002)

2. Specifications

2-1. 2P4(F) to 2P92(F) NMD Adapter

(P/N : 2P4FNM-2P92F-002)

2-1-1. Material

Body : STS303, Passivated

Center Conductor : BeCu, Au Plated

Coupling Nut : STS303, Passivated

2-1-2 Environmental

Operating Temperature: -55°C to +110°C

2-1-2. Electrical

Frequency Range : DC to 40GHz

Impedance : 50Ω Nominal

VSWR : 1.20 Max.

Insertion Loss : $-0.05 \times \sqrt{f}$ [f:Frequency]

Insulation Resistance : 5 GΩ Min.

RF Leakage : -100dB




2P4(F) to 2P92(F) NMD Adapter

Document No.	CRD-DS-2306-02
Date / Rev.	07.Feb.2023 / 0
Confidential level	N/A

3. Drawing

3-1. 2P4(F) to 2P92(F) NMD Adapter

(P/N : 2P4FNM-2P92F-002)

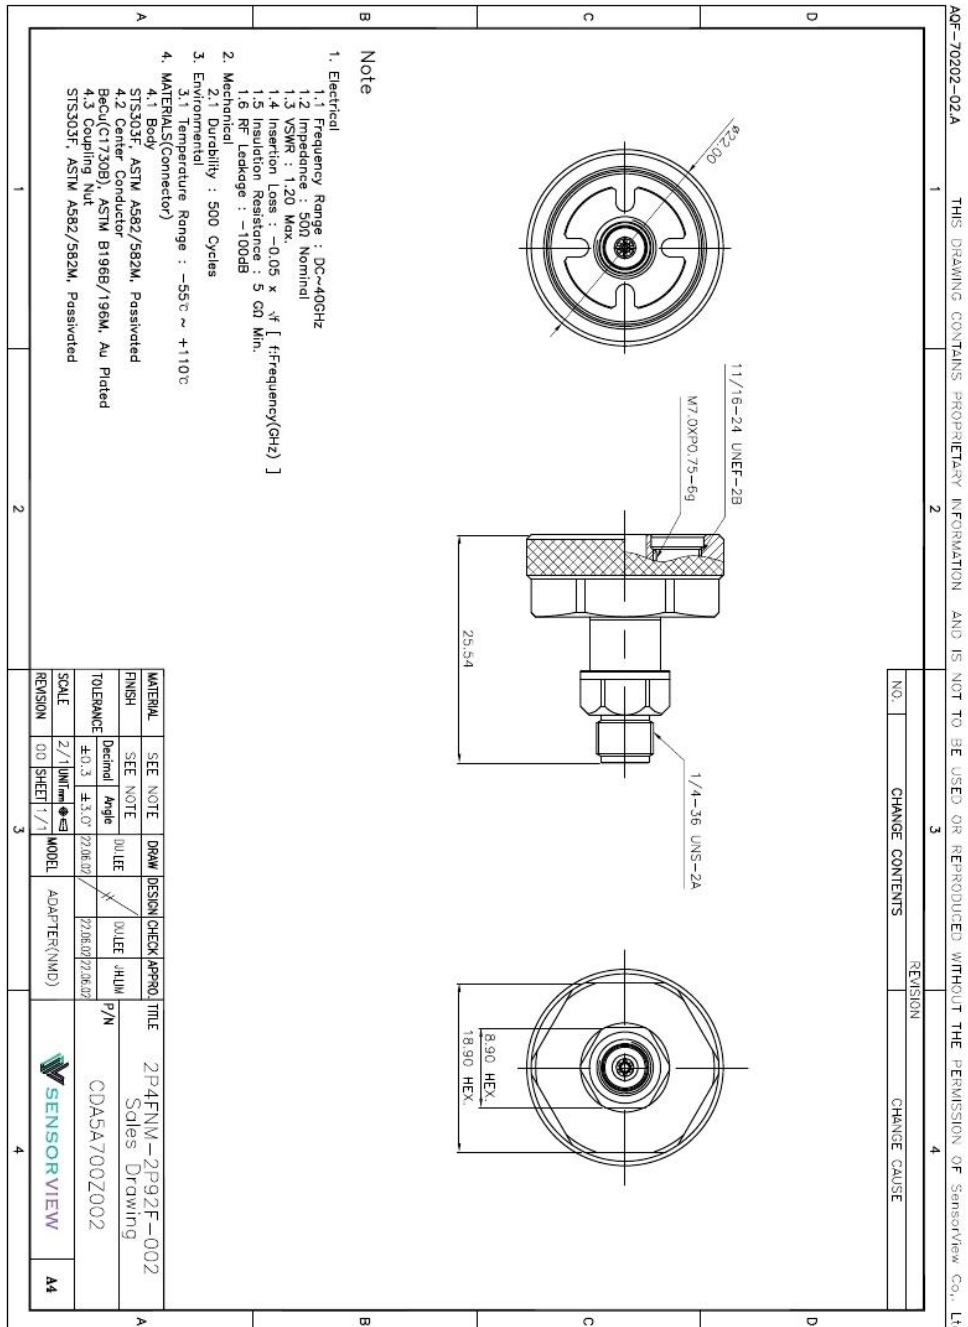



2P4(F) to 2P92(F) NMD Adapter

Document No.	CRD-DS-2306-02
Date / Rev.	07.Feb.2023 / 0
Confidential level	N/A

4. Data

4-1. 2P4(F) to 2P92(F) NMD Adapter(P/N : 2P4FNM-2P92F-002)

