

DATASHEET

2.4mm(F) to 2.92mm(M) Adapter

Product Name

1. 2P4FST-2P92M-001





2.4mm(F) to 2.92mm(M) Adapter

Document No.	CRD-DS-2315-05
Date / Rev.	10.Apr.2023 / 0
Confidential level	N/A

1. Product

1-1. 2.4mm(F) to 2.92mm(M) Adapter

(P/N : 2P4FST-2P92M-001)

2. Specifications

2-1. Material

Coupling Nut : Stainless Steel, Passivated

Body : Stainless Steel, Passivated

Center Conductor : BeCu, Au Plated

Insulator : PS

2-2. Environmental

Operating Temperature : -50°C to 100°C

2-3. Electrical

Impedance : 50Ω Typ.

Operating Freq. : DC to 40GHz

VSWR : 1.12 : 1 @40GHz Typ.

1.15 : 1 @40GHz Max.

Insertion Loss : -0.03dB x $\sqrt{f}$

RF Leakage : -100dB




2.4mm(F) to 2.92mm(M) Adapter

Document No.	CRD-DS-2315-05
Date / Rev.	10.Apr.2023 / 0
Confidential level	N/A

3. Drawing

3-1. 2.4mm(F) to 2.92mm(M) Adapter

(P/N : 2P4FST-2P92M-001)

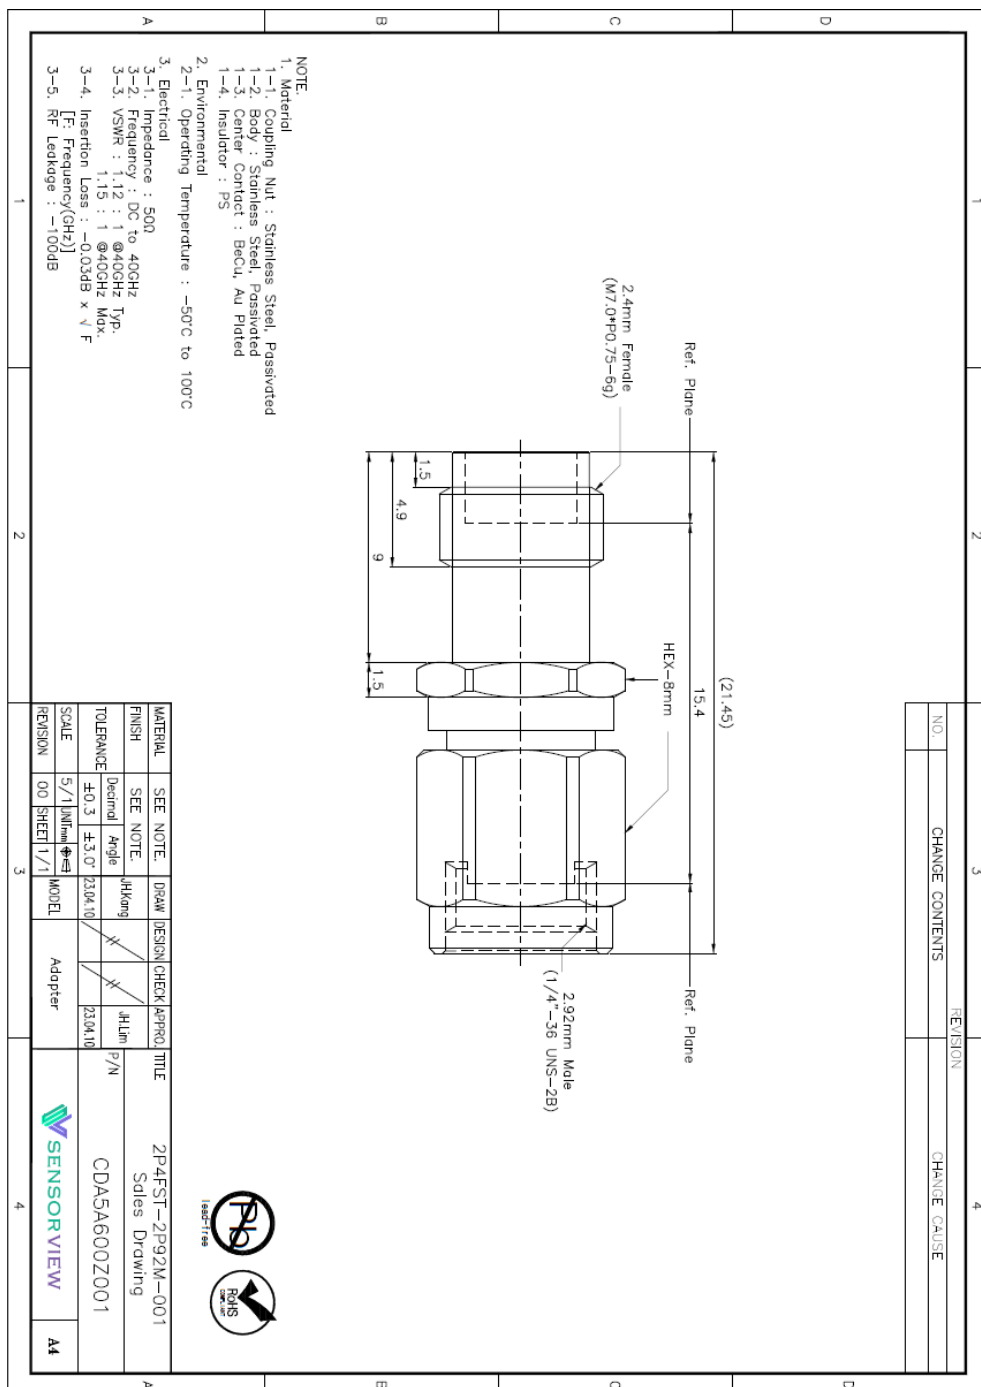



2.4mm(F) to 2.92mm(M) Adapter

Document No.	CRD-DS-2315-05
Date / Rev.	10.Apr.2023 / 0
Confidential level	N/A

4. Data

4-1. 2.4mm(F) to 2.92mm(M) Adapter

(P/N : 2P4FST-2P92M-001)

