

DATASHEET

2.4mm(M) to 2.4mm(M) Adapter

Product Name

1. 2P4MST-2P4M-001





2.4mm(M) to 2.4mm(M) Adapter

Document No.	CRD-DS-2321-01
Date / Rev.	25.May.2023 / 0
Confidential level	N/A

1. Product

1-1. 2.4mm(M) to 2.4mm(M) Adapter

(P/N : 2P4MST-2P4M-001)

2. Specifications

2-1. Material

Coupling Nut : Stainless Steel, Passivated

Body : Stainless Steel, Passivated

Center Conductor : Brass, Au Plated

Insulator : PS

2-2. Environmental

Operating Temperature : -50°C to 100°C

2-3. Electrical

Impedance : 50Ω Typ.

Operating Freq. : DC to 50GHz

VSWR : 1.20 : 1 @50GHz Typ.

1.25 : 1 @50GHz Max.

Insertion Loss : $-0.04\text{dB} \times \sqrt{f}$

RF Leakage : -100dB



3. Drawing

3-1. 2.4mm(M) to 2.4mm(M) Adapter

(P/N : 2P4MST-2P4M-001)






2.4mm(M) to 2.4mm(M) Adapter

Document No.	CRD-DS-2321-01
Date / Rev.	25.May.2023 / 0
Confidential level	N/A

4. Data

4.1. 2.4mm(M) – 2.4mm(M) Adapter (P/N : 2P4MST-2P4M-001)

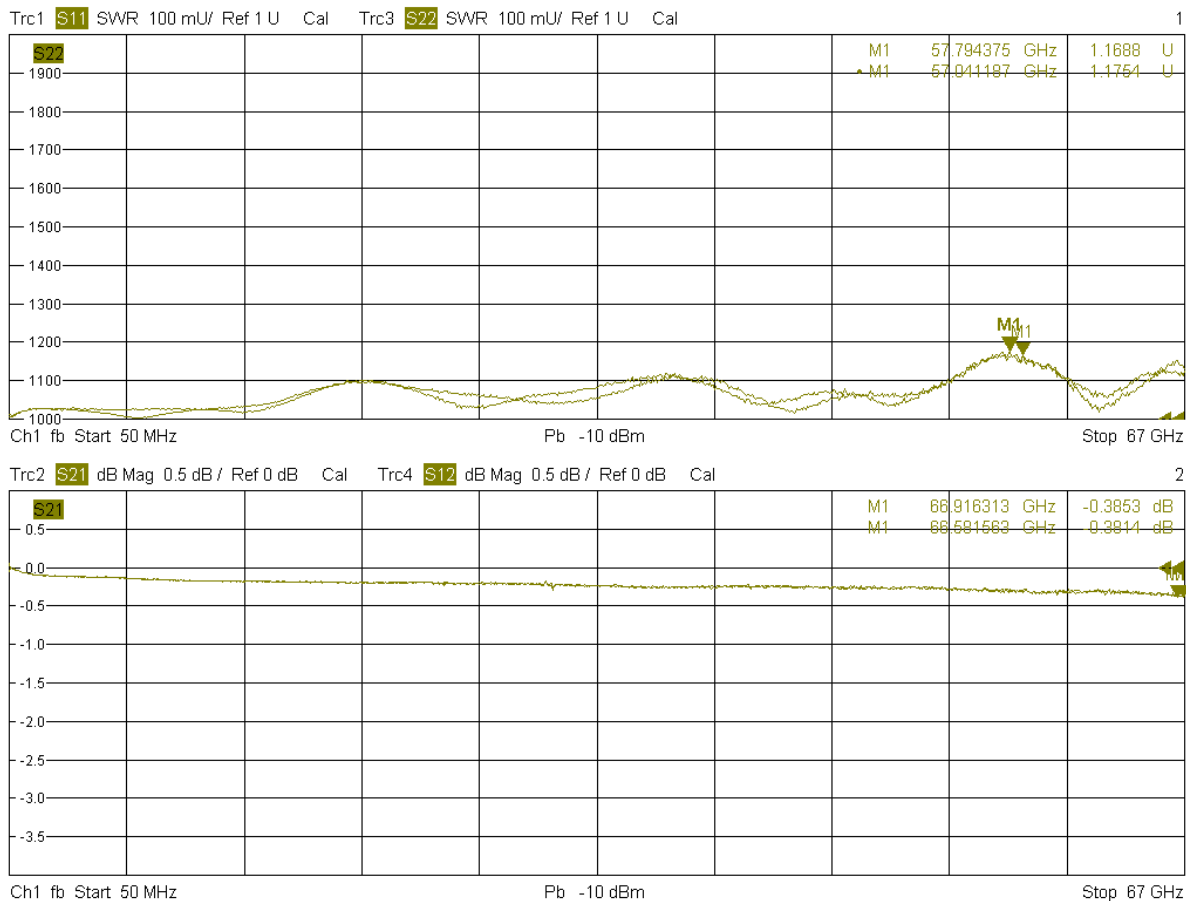

11/22/2021, 1:17 AM