

DATASHEET

2.92mm(F) to 2.92mm(F) Bulk Head Adapter

Product Name

1. 2P92FBH-2P92F-005





2.92mm(F) to 2.92mm(F) Bulk Head Adapter

Document No.	CRD-DS-2251-10
Date / Rev.	01.Jun.2023 / 0
Confidential level	N/A

1. Product

1-1. 2.92mm(F) to 2.92mm(F) Bulk Head Adapter

(P/N : 2P92FBH-2P92F-005)

2. Specifications

2-1. Material

Body : Stainless Steel, Passivated

Center Conductor : BeCu, Au Plated

Insulator : PS

2-2. Environmental

Operating Temperature : -50°C to 100°C

2-2. Electrical

Impedance : 50Ω Typ.

Operating Freq. : DC to 40GHz

VSWR : 1.10 : 1 @40GHz Typ.

1.15 : 1 @40GHz Max.

Insertion Loss : $-0.04\text{dB} \times \sqrt{f}$

RF Leakage : -100dB




2.92mm(F) to 2.92mm(F) Bulk Head Adapter

Document No.	CRD-DS-2251-10
Date / Rev.	01.Jun.2023 / 0
Confidential level	N/A

3. Drawing

3-1. 2.92mm(F) to 2.92mm(F) Bulk Head Adapter

(P/N : 2P92FBH-2P92F-005)

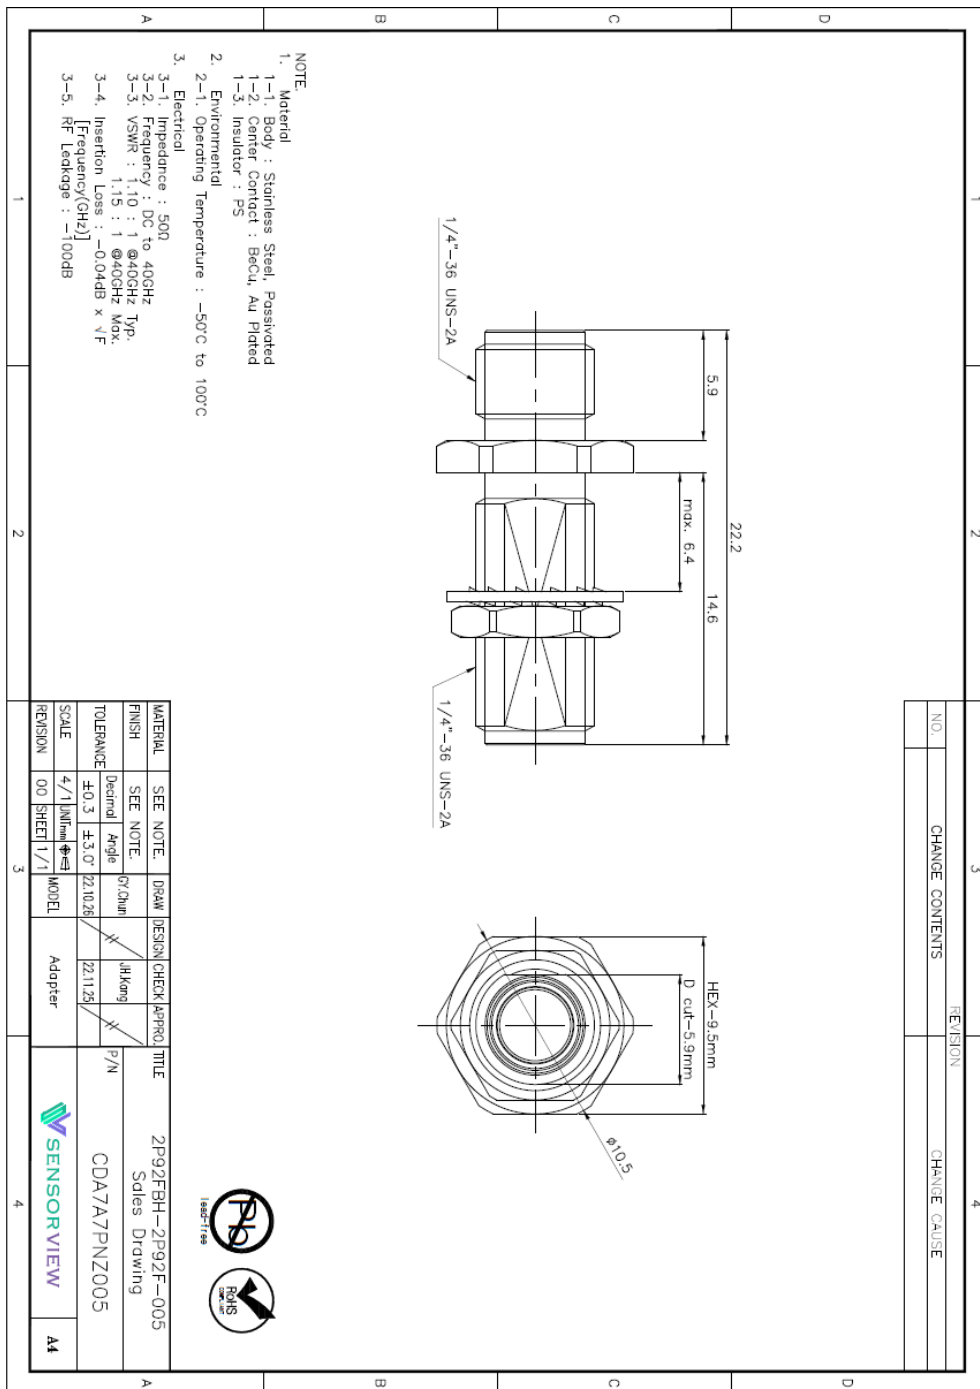



2.92mm(F) to 2.92mm(F) Bulk Head Adapter

Document No.	CRD-DS-2251-10
Date / Rev.	01.Jun.2023 / 0
Confidential level	N/A

4. Data

4-1. 2.92mm(F) to 2.92mm(F) Bulk Head Adapter

(P/N : 2P92FBH-2P92F-005)

