


P/N : 2P92MSH-SFPS27D1-2P92MSH-20”

Unit : mm

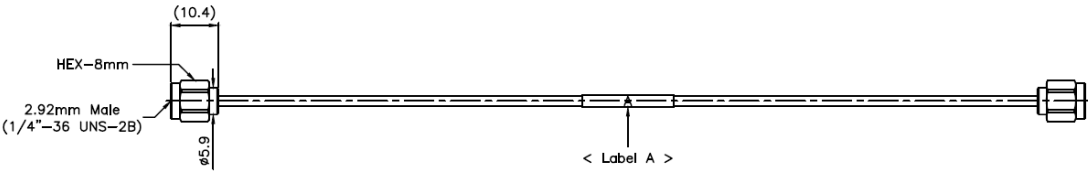

[Label A]
Product Name
SENSORVIEW / SV YY.MM.DD-XXX

Product Configuration		
Connector A	2.92mm	Male / Short
Connector B	2.92mm	Male / Short
Raw Cable	SFPS27D1	
Length	20 inch	0.508m

Electrical & Mechanical Specification		
Characteristic Impedance	50Ω	
Operating Frequency	DC to 40GHz	
VSWR	1.25 Typ.	1.35 Max.
Insertion Loss	-4.55dB @40GHz Typ.	-4.96dB @40GHz Min.
Velocity of Propagation	70% nominal	
Shielding Effectiveness	≤ -100dB @18GHz	
Outer Diameter (Cable)	2.0mm (0.078 inch)	
Minimum Bend Radius	1.5mm (0.059 inch)	

Environmental Specification	
Temperature Range	-40°C ~ +100°C
RoHs	Compliant

SensorView is certified according to ISO 9001, ISO 14001, AS/EN9100.

The information herein are for reference only and do not represent any warranty.