


P/N : 2P92MST-9S40-2P92MST-36"

Unit : mm

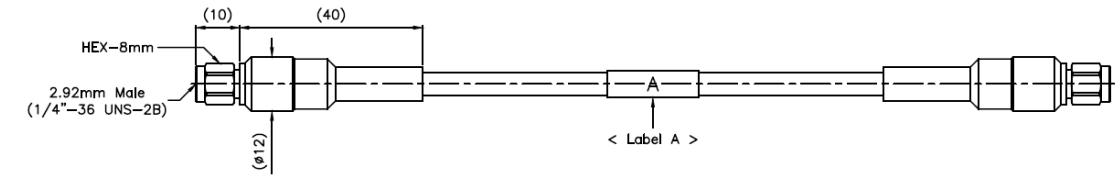

[Label A]
Product Name
SENSORVIEW / SV YY.MM.DD-XXX

Product Configuration		
Connector A	2.92mm	Male / Straight
Connector B	2.92mm	Male / Straight
Raw Cable	9S40	
Length	36 inch	0.914m

Electrical & Mechanical Specification		
Characteristic Impedance	50Ω	
Operating Frequency	DC to 40GHz	
VSWR	1.20 Typ.	1.30 Max.
Insertion Loss	-3.07dB @40GHz Typ.	-3.32dB @40GHz Min.
Velocity of Propagation	77% nominal	
Shielding Effectiveness	≤ -100dB @18GHz	
Outer Diameter (Cable)	5.0mm (0.196 inch)	
Minimum Bend Radius	25mm (0.98 inch)	
Phase Stability vs. Flexure	Max. 14° @40GHz	
Loss Stability vs. Flexure	Δ 0.1dB to 40GHz	

Environmental Specification	
Temperature Range	-40°C ~ +100°C
RoHs	Compliant

SensorView is certified according to ISO 9001, ISO 14001, AS/EN9100.

The information herein are for reference only and do not represent any warranty.