


| REVISION |                 |              |
|----------|-----------------|--------------|
| NO.      | CHANGE CONTENTS | CHANGE CAUSE |
|          |                 |              |

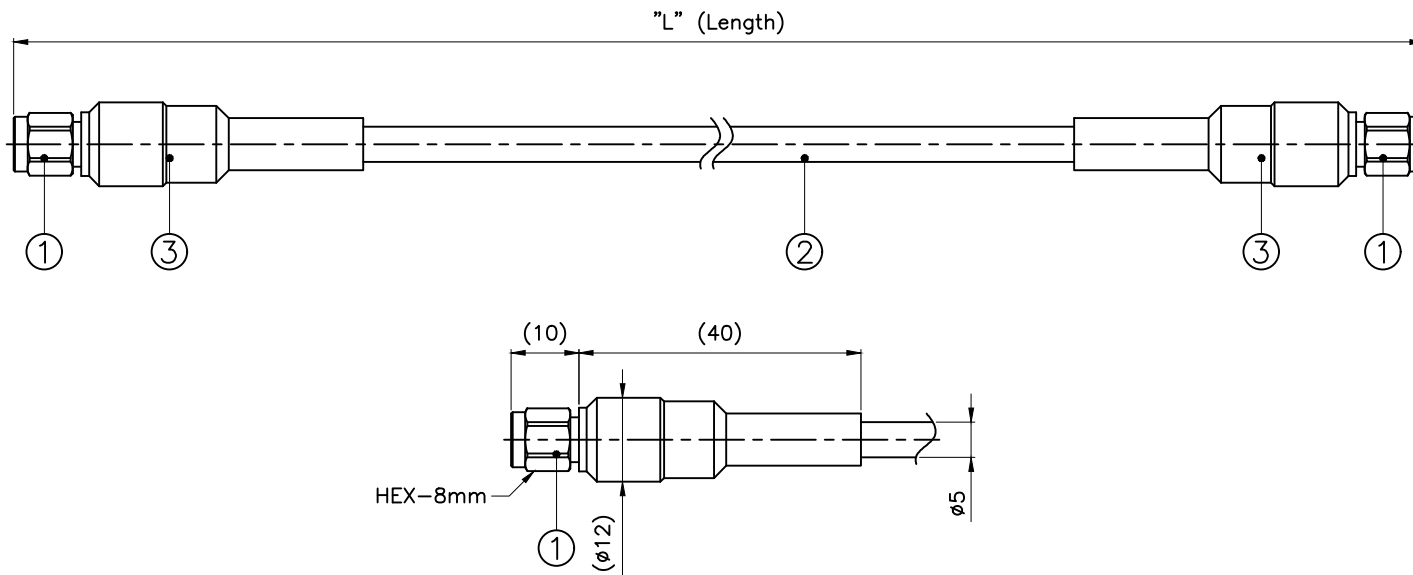

1-1. Coupling Nut : Stainless Steel, Passivated  
1-2. Body : Stainless Steel, Passivated  
Brass, Au Plated  
1-3. Center Contact : BeCu, Au Plated  
1-4. Insulator : PEI

2-1. Operating Temperature :  $-40^{\circ}\text{C}$  to  $100^{\circ}\text{C}$

3-1. Impedance : 50Ω  
 3-2. Frequency : DC to 40GHz  
 3-3. VSWR : 1.20 : 1 Typ. @40GHz  
           1.30 : 1 Max. @40GHz  
 3-4. Insertion Loss(Cable) : -2.60dB/m Typ. @40GHz  
                                   -2.86dB/m Max. @40GHz  
 3-5. Insertion Loss(Connector, EA) : -0.02dB x √F  
           [F: Frequency(GHz)]



|           |   |                         |           |             |        |             |                |                              |      |
|-----------|---|-------------------------|-----------|-------------|--------|-------------|----------------|------------------------------|------|
| 3         | — | Heat Shrink Tube(Black) |           |             |        | 2EA         | Silicon Rubber | —                            | 00   |
| 2         | — | Cable(9S40)             |           |             |        | 1EA         | —              | —                            | 00   |
| 1         | — | 2P92MST—9X40—001        |           |             |        | 2EA         | —              | —                            | 00   |
| NO.       |   | PART NO.                |           | DESCRIPTION |        | Q'TY        | MATERIAL       | REMARKS                      | REV. |
| MATERIAL  |   | SEE NOTE.               |           | DRAW        | DESIGN | CHECK       | APPRO.         | TITLE                        |      |
| FINISH    |   | SEE NOTE.               |           | JH.Kang     |        |             | JH.Lim         | 2P92MST—9S40—2P92MST—L Sales |      |
| TOLERANCE |   | Decimal                 | Angle     |             |        |             |                | P/N                          |      |
|           |   | ±0.3                    | ±3.0°     | 23.02.07    |        |             | 23.02.13       | —                            |      |
| SCALE     |   | 1/1                     | UNITmm    | MODEL       |        | Cable Ass'y |                |                              |      |
| REVISION  |   | 00                      | SHEET 1/1 |             |        |             |                |                              |      |
|           |   |                         |           |             |        |             |                | A4                           |      |