
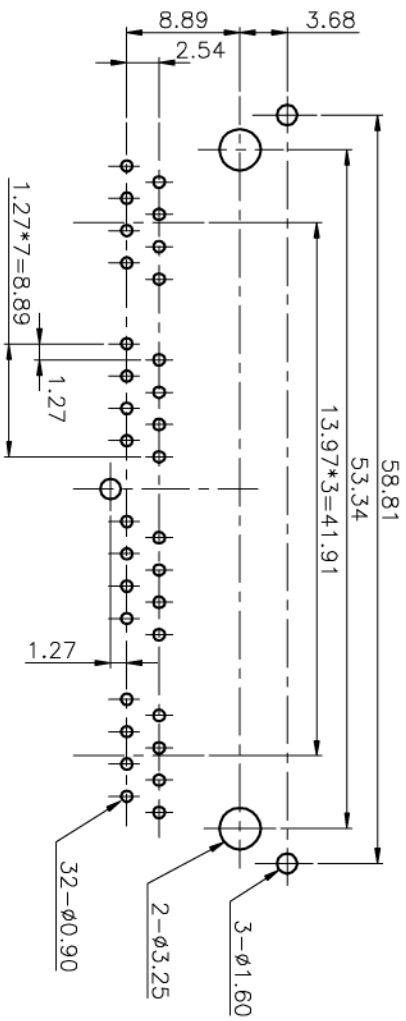
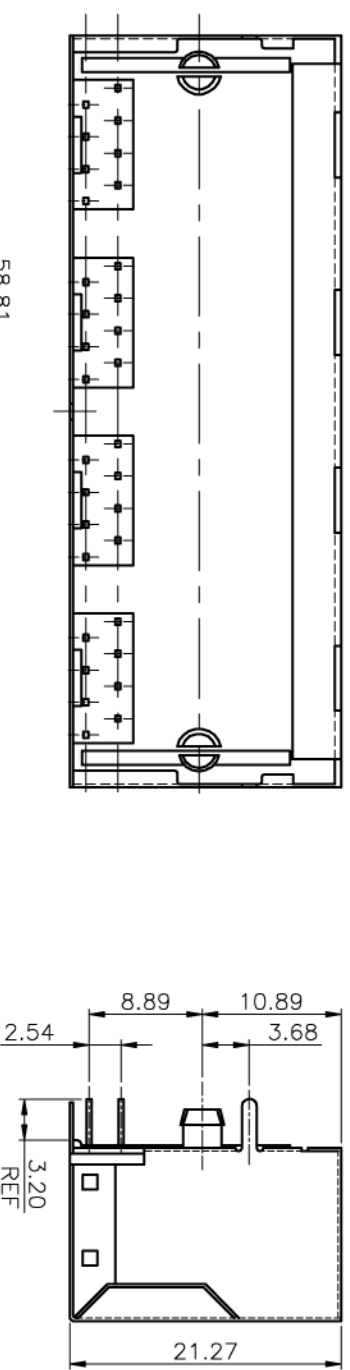


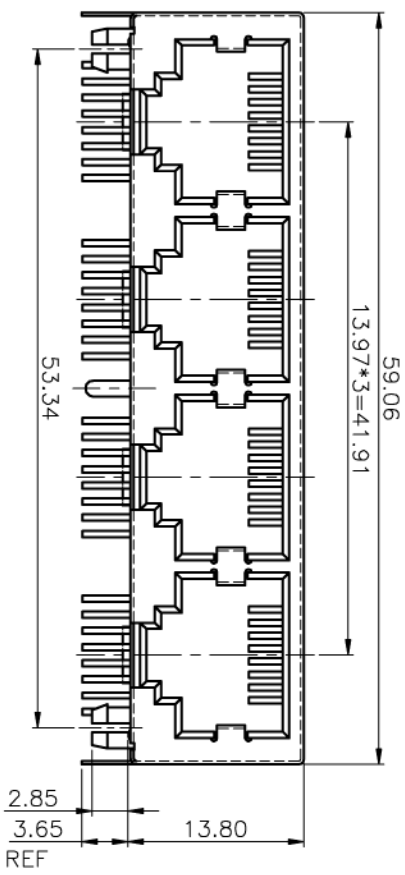

Materials:

Shielded: 0.25mm Thickness Copper Alloy With Nickel
Housing: Standard Material Glass Filled Polyester UL 94V-0 Standard Colour (Black)
Contact: 0.35mm Thickness Alloy C5210/Gold Plating Over Nickel in Contact Area.
Gold Plating: Selective Gold Plating
Tin Plating Over Nickel in Solder Area

REVISION	DATE	TOLERANCE	ARTICLE	Multi-Port PCB Jack
.XXX		±0.10	(8 Ports)	
.XX		±0.25		
X		±0.38		
X		±0.50		
APPL		DMG NO.	301204S	
CML		UNIT	SCALE	SHEET
DR.		mm	2/1	1/1
Bomar Interconnect				REV. A