

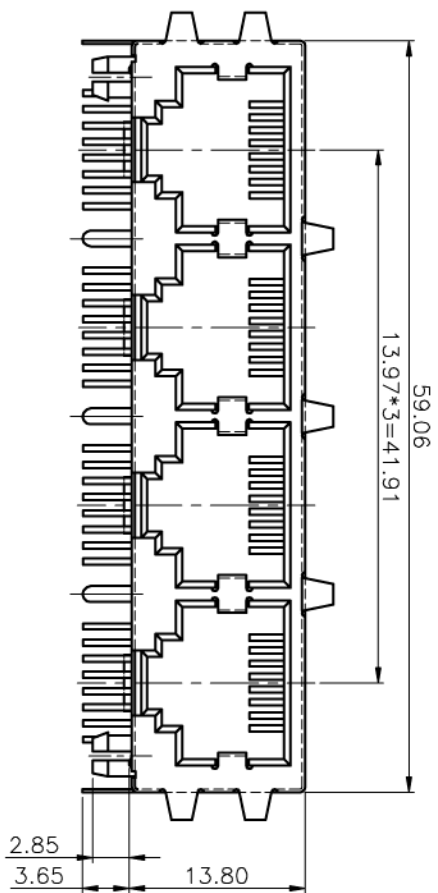
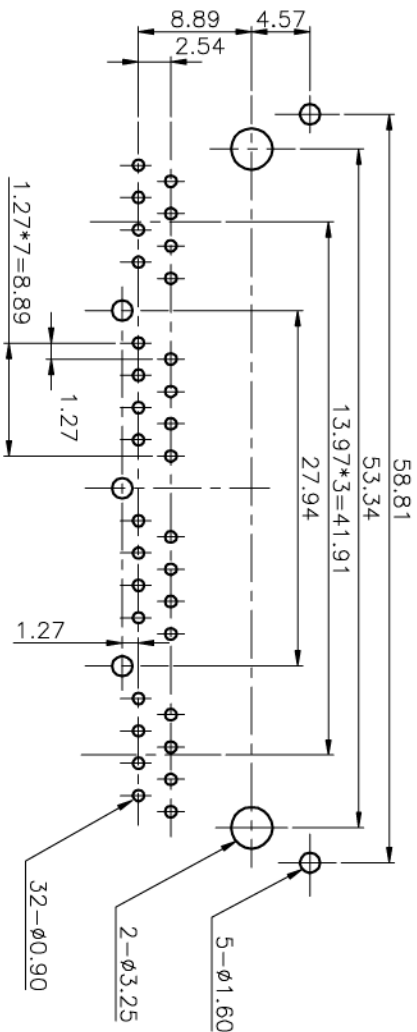


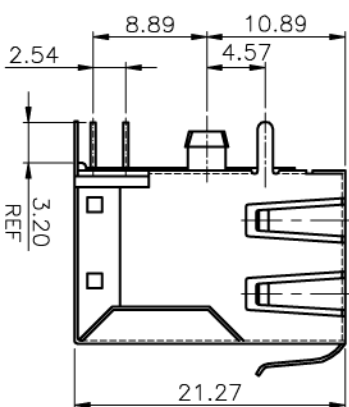

Materials:

Shielded: 0.25mm Thickness Copper Alloy With Nickel
Housing: Standard Material Glass Filled Polyester UL 94V-0 Standard Colour (Black)
Contact: 0.35mm Thickness Alloy C5210/Gold Plating Over Nickel in Contact Area.
Gold Plating: Selective Gold Plating
Tin Plating Over Nickel in Solder Area

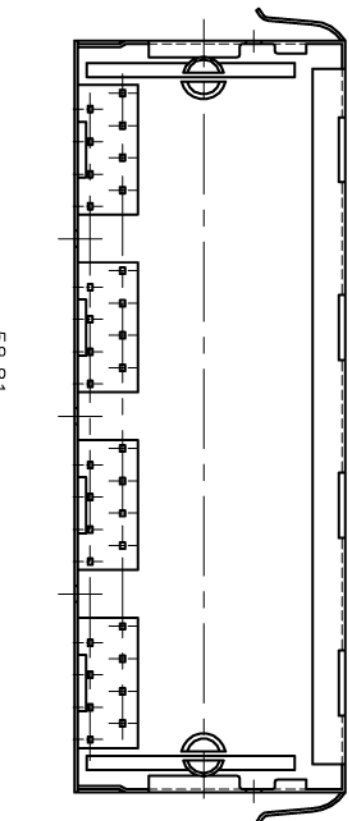

REVISION	DATE	TOLERANCE	ARTICLE	Multi-Port PCB Jack
		.XXX ±0.10	(8 Ports)	
		.XX ±0.25		
		.X ±0.38		
		X ±0.50		
		APPL	DWG NO.	301204ST
		CMO	UNIT	SCALE
		DR	mm	2/1 1/1
				REV. A

Bomar Interconnect