



- 1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-11GHZ
 1.2 DWV: 1000 RMS
 1.3 TEMPERATURE RANGE:-65° C TO +165° C
 1.4 IMPEDANCE: 50 OHMS
 1.5 INSULATION RESISTANCE: 5000M OHMS

- 2.0 MATERIALS
 2.1 DIELECTRIC: PTFE
 2.2 CENTER CONTACT: SILICON BRONZE
 2.3 BODY:BRASS
 3.0 FINISHES
 3.1 CENTER CONTACT: GOLD PLATED
 3.2 BODY :NICK PLATED
 4.0 THE CONNECTOR IS ROHS COMPLIANT.

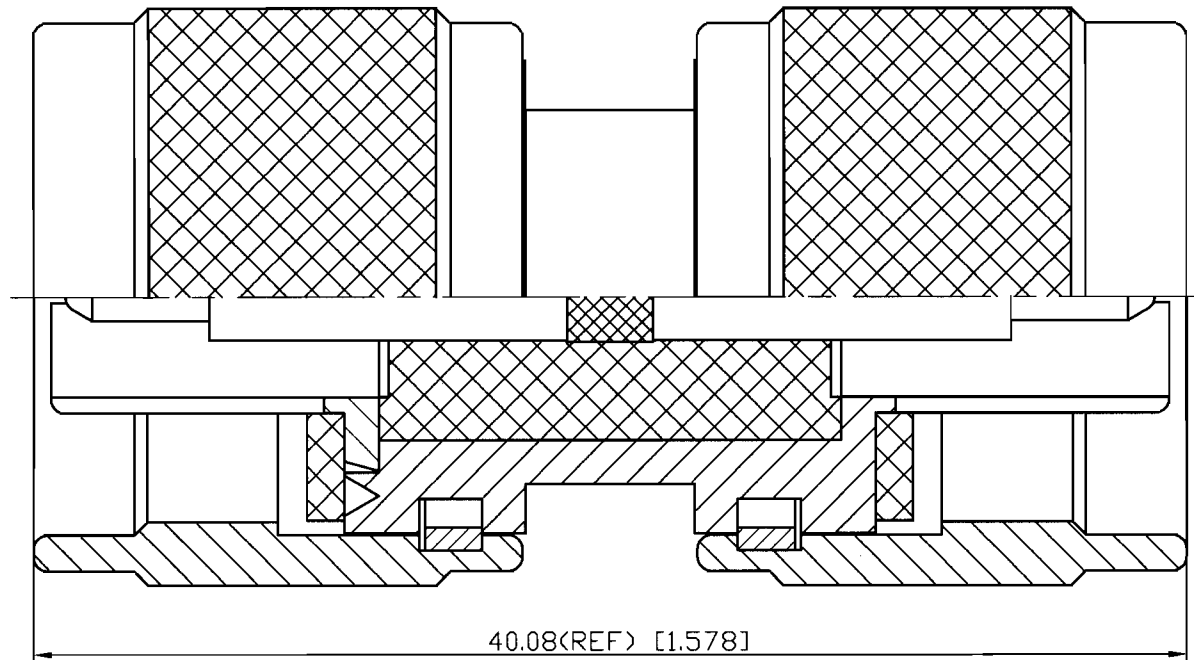

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION
 PROPRIETARY TO SDT INC. IT MUST NOT BE REPRODUCED OR
 DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY. IN WHOLE
 OR PART EXCEPT AS AUTHORIZED IN WRITING BY SDT
 INCORPORATED.

UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS ARE IN INCH.
 ALL DIMENSIONS ARE AFTER PLATING.
 .XX=±.005 ALL MACHINED SURFACES $\sqrt{R}$ MAX.
 .X=±.01 ANG. ±1/2° FRACTIONAL=±1/64



THIRD ANGLE PROJECTION

DWN	Steven	08/20-08
CHKD	Dan	3/20-08
APPR		

Shanghai SDT Inc. No.4Lane 1175Tongpu Rd.,Shanghai,China,200333 Fax:021-52701318; Tel:52701316; Email:sdpshe@sh163.net		
TITLE STRAIGHT ADAPTER TYPE N PLUG TO PLUG		
MATERIAL:		FINISH:
DO NOT SCALE DRAWING	DWG NO. 313-313-3	REV. 0