

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY SHANGHAI SHIDI TECHNOLOGY INC.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

1.0 PERFORMANCE

1.1 FREQUENCY RANGE: DC-3GHZ

1.2 VSWR: < 1.3

1.3 TEMPERATURE RANGE: -65° C TO +165° C

1.4 IMPEDANCE: 50 OHMS

2.0 MATERIALS

2.1 DIELECTRIC: PTFE

2.2 BODY: BRASS


2.3 CENTER CONTACT: BeCu

3.0 FINISHES

3.1 BODY: NICKEL PLATING

3.2 CENTER CONTACT: GOLD PLATING


4.0 THE CONNECTOR IS ROHS COMPLIANT.

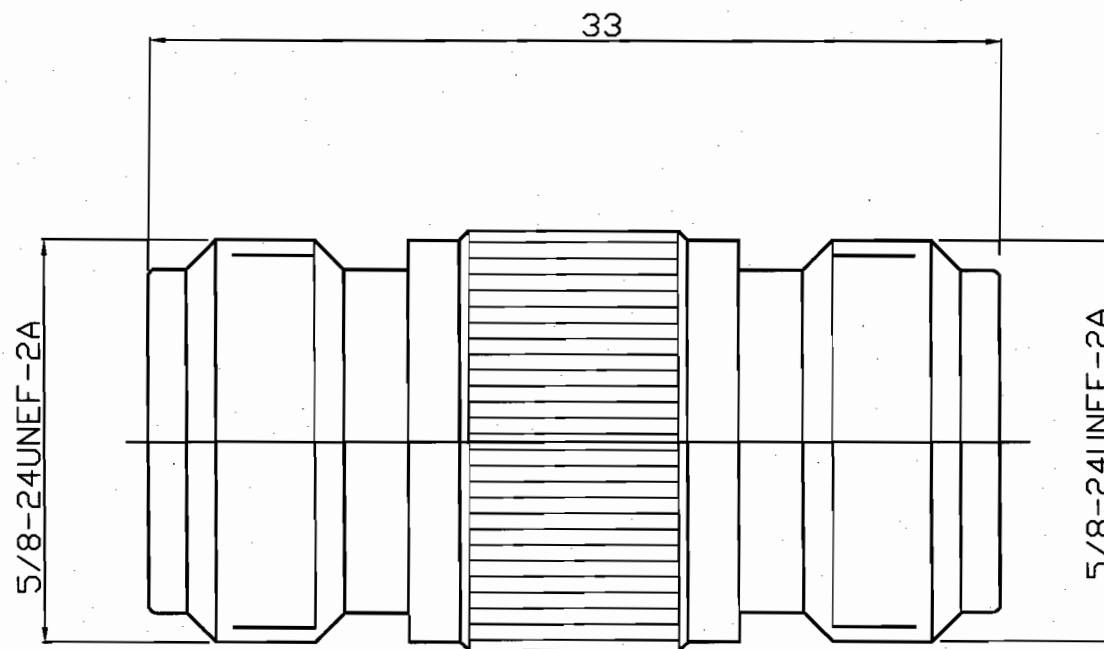

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-.039
2 PLC	±	-
3 PLC	±	-.005
4 PLC	±	-
ANGLES	±	-

MATERIAL

FINISH

DWN 2014-1-17

CHK LQW

DAVID

2014-1-17

APVD

-

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

SHANGHAI SHIDI TECHNOLOGY INC.

NAME

ADAPTOR N JACK / N JACK

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

C-323-323-04

SCALE 3:1

SHEET 1 OF 1

REV 1