

ADAPTER, BETWEEN SERIES 2.9mm / 3.5mm

DC - 34 GHz

api 
technologies corp.
> INMET

MODELS: 5266, 5267, 5268, 5269

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC — 34 GHz
VSWR _____ 1.25:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +85°C


Mechanical:

3.5mm Connectors _____ Passivated Stainless Steel
Mates both Mechanically & Electrically with
all SMA, 2.9mm & K* Series Connectors.
2.9mm Connectors _____ Passivated Stainless Steel
Mates both Mechanically & Electrically with
all SMA, 3.5mm & K* Series Connectors.
Conductors _____ Gold Plated Beryllium Copper

*K is a trademark of Anritsu Corp.


Model Number: **5266**
2.9mm FEMALE / 3.5mm FEMALE

Model Number: **5267**
2.9mm FEMALE / 3.5mm MALE

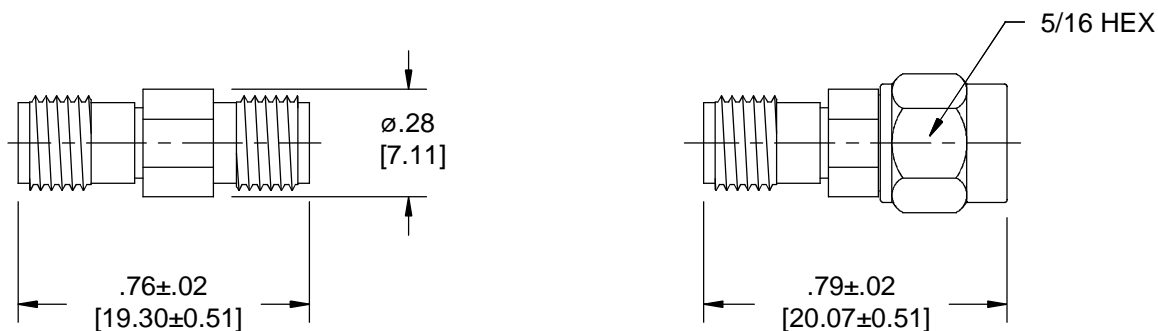

Model Number: **5268**
2.9mm MALE / 3.5mm FEMALE

Model Number: **5269**
2.9mm MALE / 3.5mm MALE

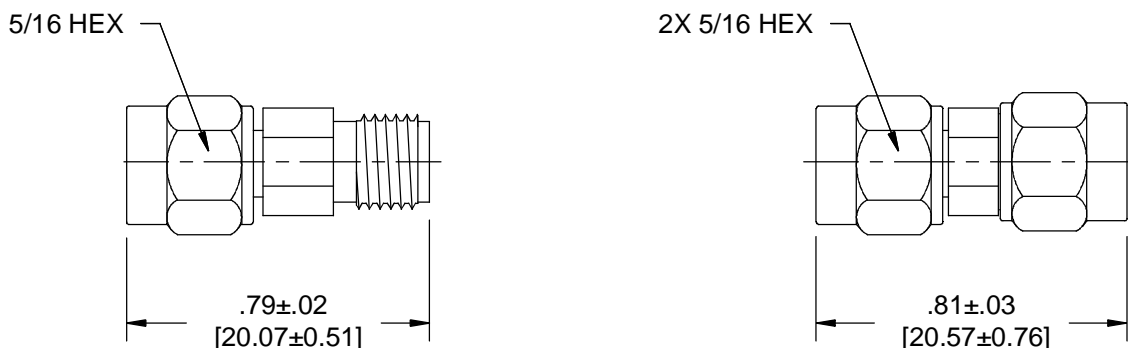

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.