


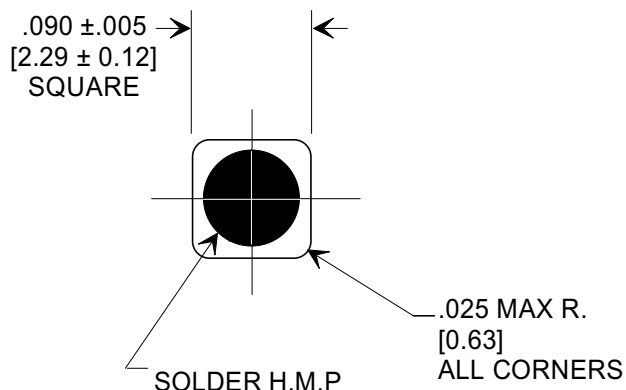


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC []

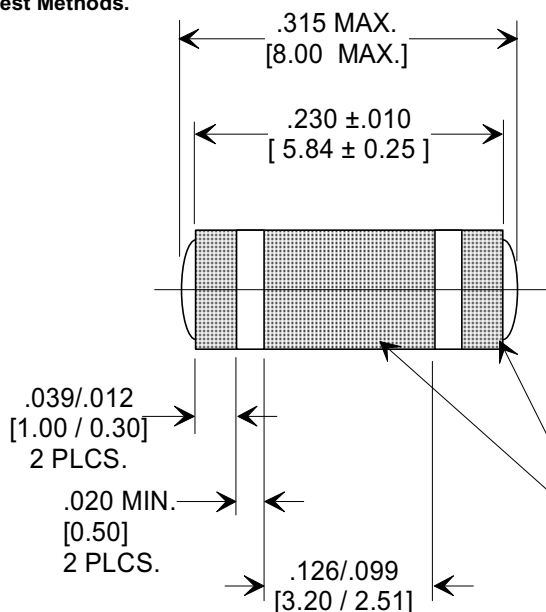

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



ELECTRODE
TERMINATION
SEE NOTE 5.

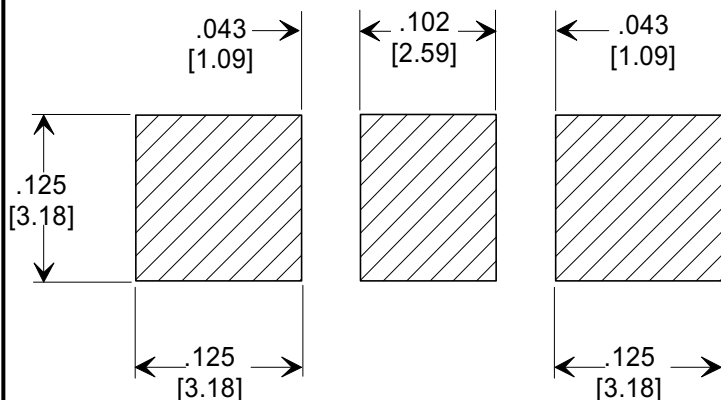

SUGGESTED
MOUNTING PATTERN

1. INDUCTANCE TO BE 0.1 μ H MINIMUM.
2. PACKAGE: BLISTER TAPE TO IEC-60286-3 TYPE II AND EIA-481-A.
FOR 2,000 PIECE REEL ADD "M" TO THE PART NUMBER
FOR 7,000 PIECE REEL ADD "T" TO THE PART NUMBER
3. TUSONIX NON-RoHS PART NUMBER:
4700-005 M OR 4700-005 T.
TUSONIX RoHS COMPLIANT PART NUMBER:
4700-005 M LF OR 4700-005 T LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS
PART NUMBER WHEN ORDERING.
4. PART MARKING: STANDARD PART: NO MARKING.
RoHS PART: LABELED ON PACKAGING ONLY.
5. ELECTRODE TERMINATION: STANDARD 60/40
SOLDER; RoHS COMPLIANT - MATTE TIN.

CAP.	TOLERANCE	WVDC		TEST VOLTAGE	I.R.MIN. @ 100 (VDC.)	IDC	TYPICAL NO LOAD INSERTION LOSS dB AT 25°C PER MIL-STD-220		
		85°C	+125°C				10 MHZ	100 MHZ	1 GHZ
1000 pF	GMV	100	100	300 VDC	10 G Ω	10 A	7	40	65

X-2015 Rev-0	REVISION RECORD						--TOLERANCES-- Unless Otherwise Specified		Title SURFACE MOUNT SQUARE STYLE PI FILTER			
	Original Release C.O.		0		DECIMAL ± .005 [0.13]		Drawn FG 9-9-94				Scale 7 X	
	REVISED NOTES. S.M. 06-20-03						ANGLES ± 		Approved NV 9-9-94			
	20050916-1-02		14		ADDED PROPERTY NOTE: S.M. 03-09-07		TUSONIX		A 4700-005			
	20070301-1-02		15		NOTES 2,3 REVISED L.E.10-08-12		TUCSON, ARIZONA					
	ECO-3124		B									