



NOTES:

1. MAXIMUM MOUNTING TORQUE = 4lbs-in.
2. HARDWARE IS INCLUDED.
3. THIS PART CODED "NCA". API TECHNOLOGIES  DOES NOT HAVE CHANGE AUTHORITY. CUSTOMER APPROVAL REQUIRED BEFORE PRODUCT/PROCESS CHANGES CAN BE MADE.

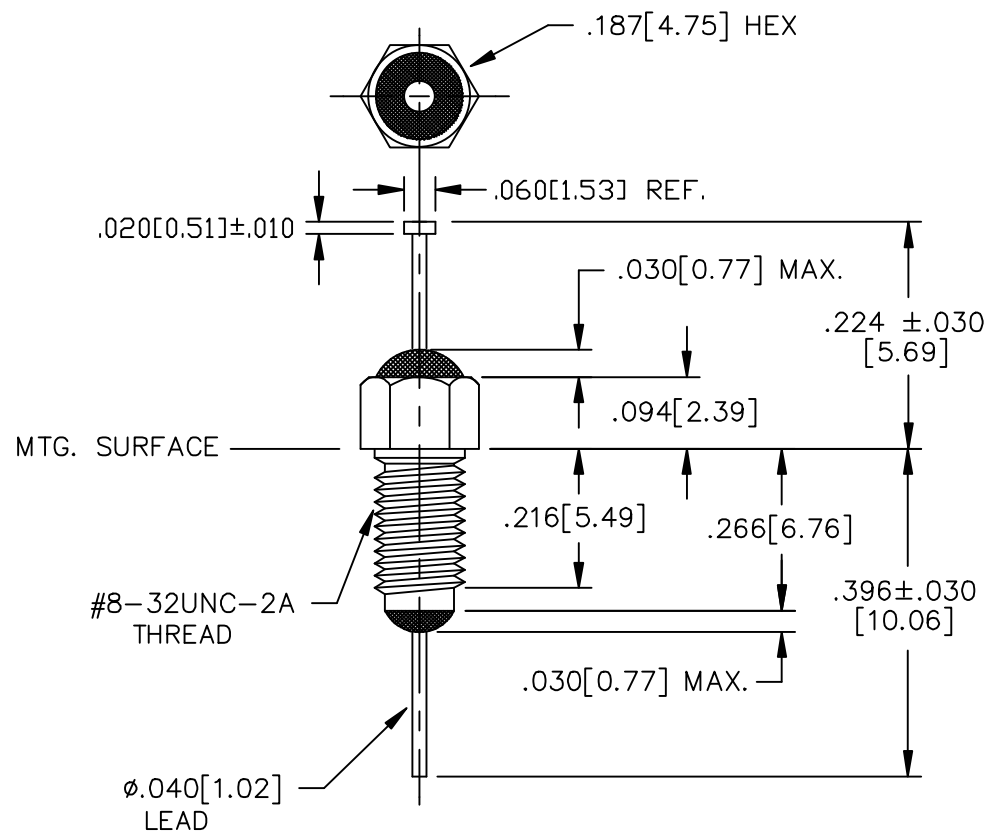


LEAD FINISH: SOLDER	
BUSHING FINISH: SOLDER COATED	
CAPACITANCE	3000pF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	15 AMP MAX.
WORKING VOLTAGE	85°C 85 VAC MAX. 125°C 125 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	10
30	--
100	30
500	55
1-10 GHz	65



MARKING:
 PART: M15733/44-0001
 BAG:
 MIL 15733/44-0001
 OLSP2
 125VDC
 MAX. OPER. TEMP. : 125°C
 15 AMPS
 QTY/BAG (100 MAX.)
 P.O. NO.
 NOTE: PACKAGE TO BE MARKED SAME AS THE BAG.

REV.	NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
46	45	Fractions ± 1/64
44	43	Dec. .xx±
		Dec. .xxx±.005
		Angles ±0° 30'
		CODE IDENT. NO. OLSP2

api 
 technologies corp.

FAIRVIEW
 PENNSYLVANIA

Dwn. KAUFFMAN	Description Pi
Date 4-23-13	RESIN SEAL FILTER
Engr. M.McALEVY	51-744-003
Scale NONE	