
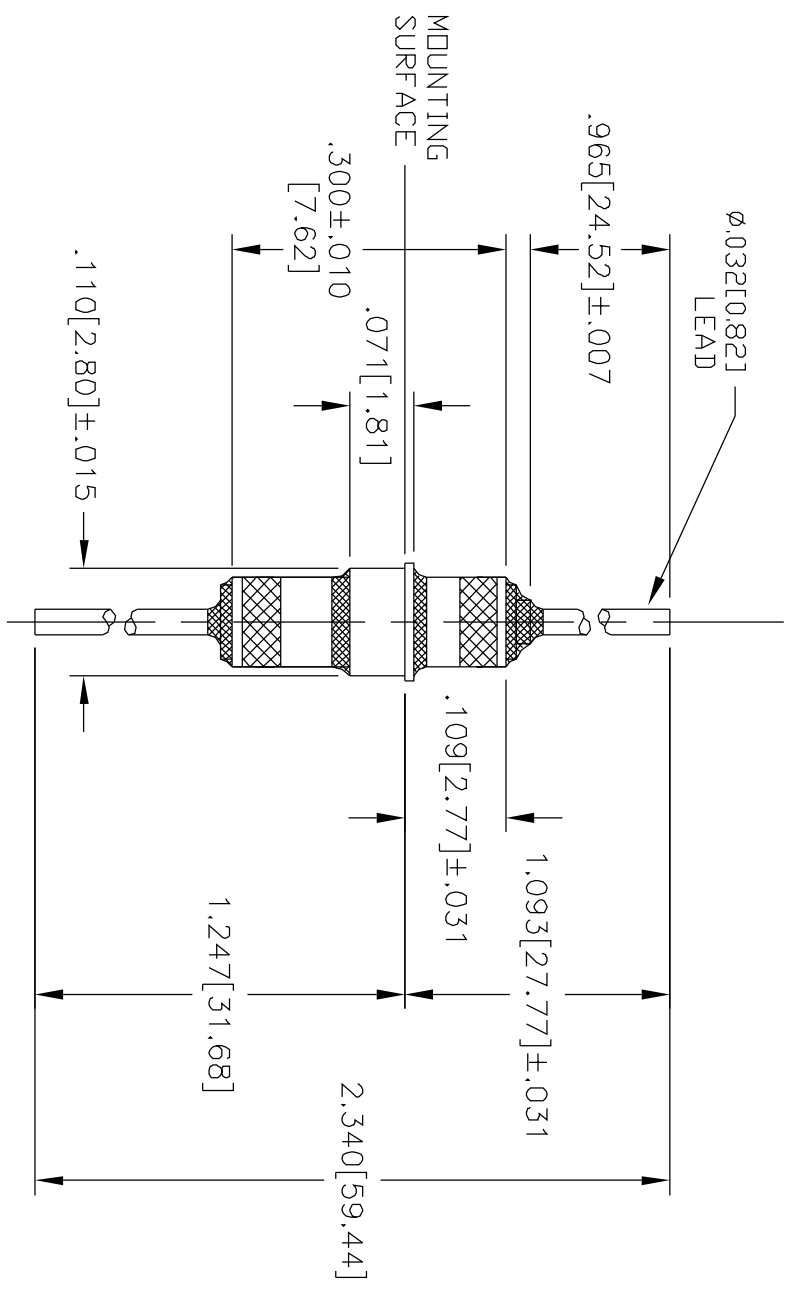



- NOTES:
1. SUGGESTED MOUNTING HOLE = $\phi .117 \pm .002$
 2. MAXIMUM INSTALLATION TEMP.: 500°F

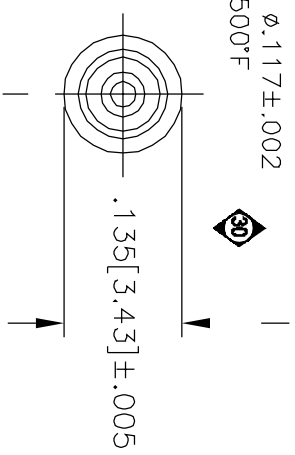

	30	29	REV. 30	TOLERANCES UNLESS OTHERWISE SPECIFIED	
	CN 19495-CPD	CN. 184967 REDAWN	CHANGE NOTICE	Fractions ± 1/64	
				Dec. .xx ±	
				Dec. .xxx ±.005 [0.127]	
				Angles ±0° 30'	
				CODE IDENT. NO.	
				DLS P2	

LEAD FINISH: SOLDER	
EYELET FINISH: SOLDER	
CAPACITANCE	1500pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 200VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHZ	I.L. (db)
10	4
30	12
100	46
300	70
1 GHZ	70

SCHEMATIC



MARKING:

PART: NONE
BAG:

51-713-002
DATE CODE
QTY./BAG (100 MAX.)

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW
PENNSYLVANIA

Wm. KAUFFMAN

Dec. 6-11-98

Appd.

Scale NONE

Description

PI SOLDER-IN FILTER

51-713-002