

ADAPTERS, IN-SERIES

2.9mm , DC - 40 GHz, Flange Mount

SPECIFICATIONS:

Models: 5344

RoHS
Compliant

Electrical:

Frequency Range _____ DC - 40 GHz
VSWR _____

DC - 18 GHz _____ 1.15:1 Max.

18 - 26.5 GHz _____ 1.25:1 Max.

26.5 - 40 GHz _____ 1.35:1 Max.

Impedance _____ 50 Ohms

Operating Temp Range _____ -65°C to +125°C

Mechanical:

2.9mm Connectors _____ Passivated Stainless Steel


Mates both Mechanically and Electrically with
SMA, 3.5mm and K* Series Connectors

Conductors _____ Gold Plated Beryllium Copper

* K is a Trademark of Anritsu Corp.

Model Number: **5344**

2.9mm Female/Female Connector

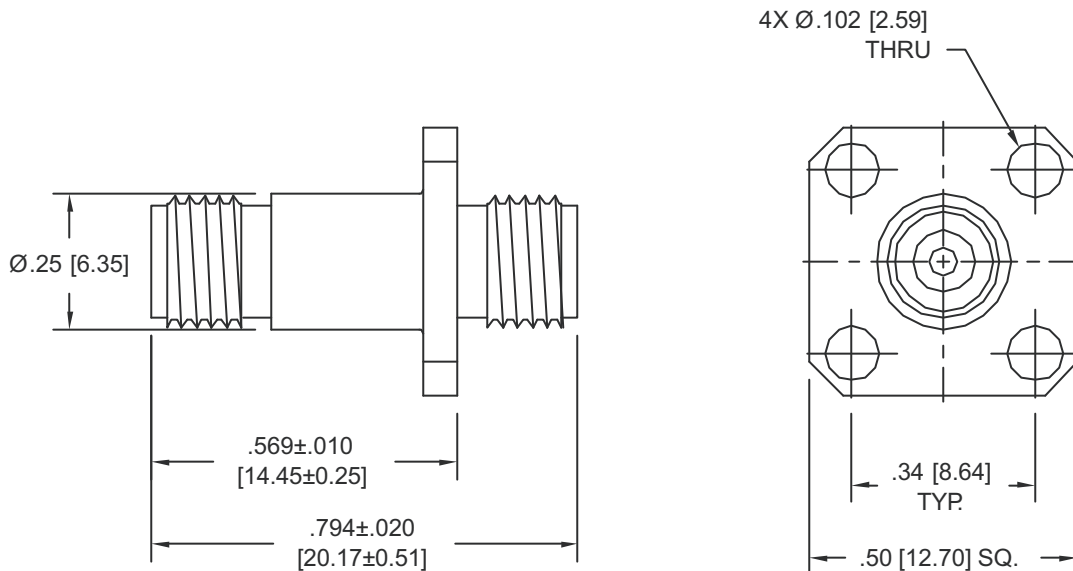

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5344: REV -



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com

