


.500 [12.70] HEX


THIS DOCUMENT AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF API TECHNOLOGIES CORP. (API) AND CONTAINS API CONFIDENTIAL PROPRIETARY INFORMATION WHICH SHALL NOT BE COPIED, REPRODUCED OR USED FOR ANY OTHER PURPOSE WHATSOEVER UNLESS WRITTEN PERMISSION IS GRANTED BY API TECHNOLOGIES.

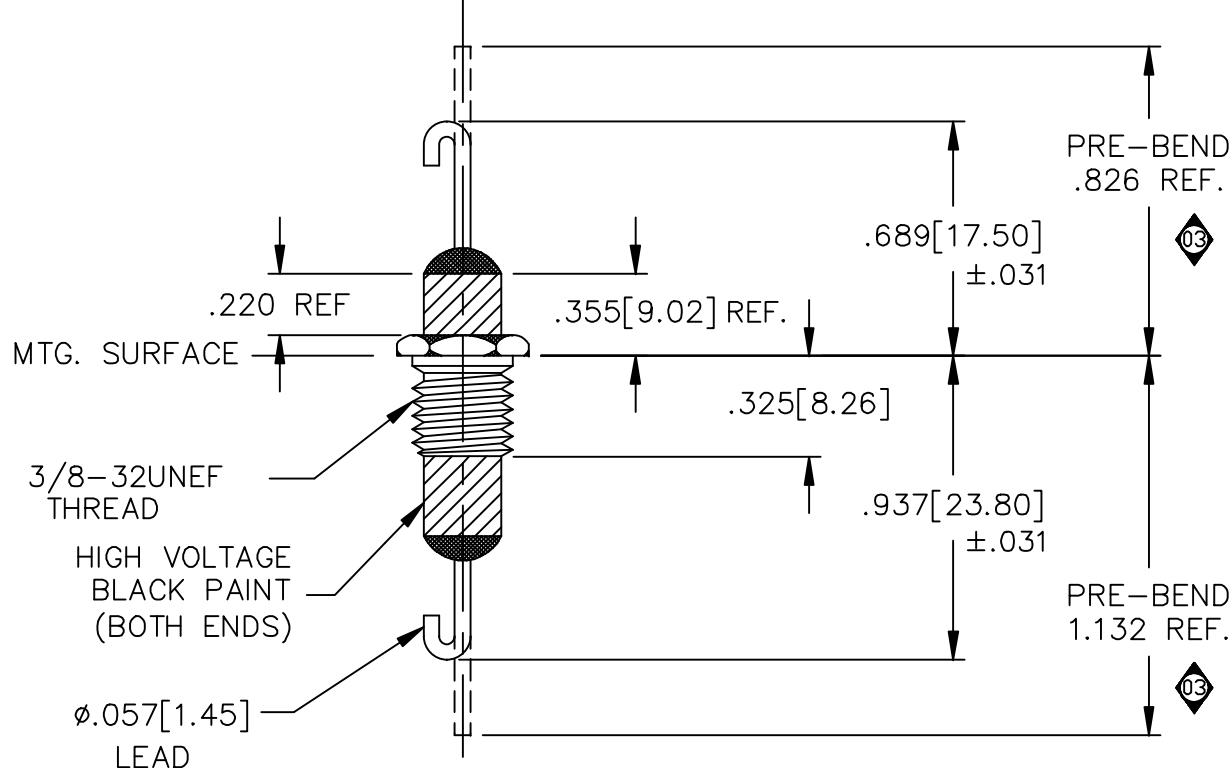

NOTE: SECURED FERRITE.

LEAD FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	4000pF±20%
TEMP. RANGE	-55°C TO 125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	85°C 2500 VDC MAX. 240 RMS 125°C 1000 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	

FREQ. MHz	I.L. (db)
50	--
100	--
200	--
500	--
1 GHz	--
10 GHz	--

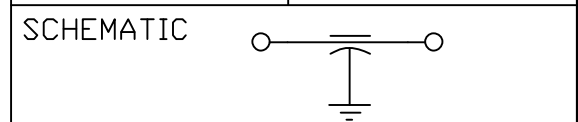

MARKING:

PART: SCI-R789-004

BUBBLE PACK:

54-R789-004

DATE CODE

QTY: (30 MAX.)

	03	02	01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	apitech™ FAIRVIEW PENNSYLVANIA	
						Fractions ± 1/64		
						Dec. .xx±	Dwn. KAUFFMAN	Description FEED THRU
						Dec. .xxx±.010	Date 01-24-20	RESIN SEAL FILTER
						Angles ±0° 30'	Engr. TAYLOR	54-R789-004
						CODE IDENT. NO. DLSP2	Scale NONE	
	CN #40847	CN #15535	CN 48421-ENG	CN 48024-ENG	CHANGE NOTICE			