



- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-11GHZ
- 1.2 DWV: 1500V RMS
- 1.3 TEMPERATURE RANGE:-55° C TO +155° C
- 1.4 NOMINAL IMPEDANCE: 50OHMS
- 1.5 INSULATION RESISTANCE: 5000 MOHMS

- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE
- 2.2 CENTER CONTACT: BeCu B 196 (ASTM)
- 2.3 BODY ANT NUT: BRASS B 16 (ASTM)
- 2.4 LOCKWASHER: Mn-STEEL
- 3.0 FINISHES
- 3.1 CENTER CONTACT: GOLD PLATED 30 MICROINCHES THICKNESS
- 3.2 ALL OTHER METAL PARTS: NICKEL PLATED 120 MICROINCHES THICKNESS
- 4.0 THE CONNECTOR IS ROHS COMPLIANT.

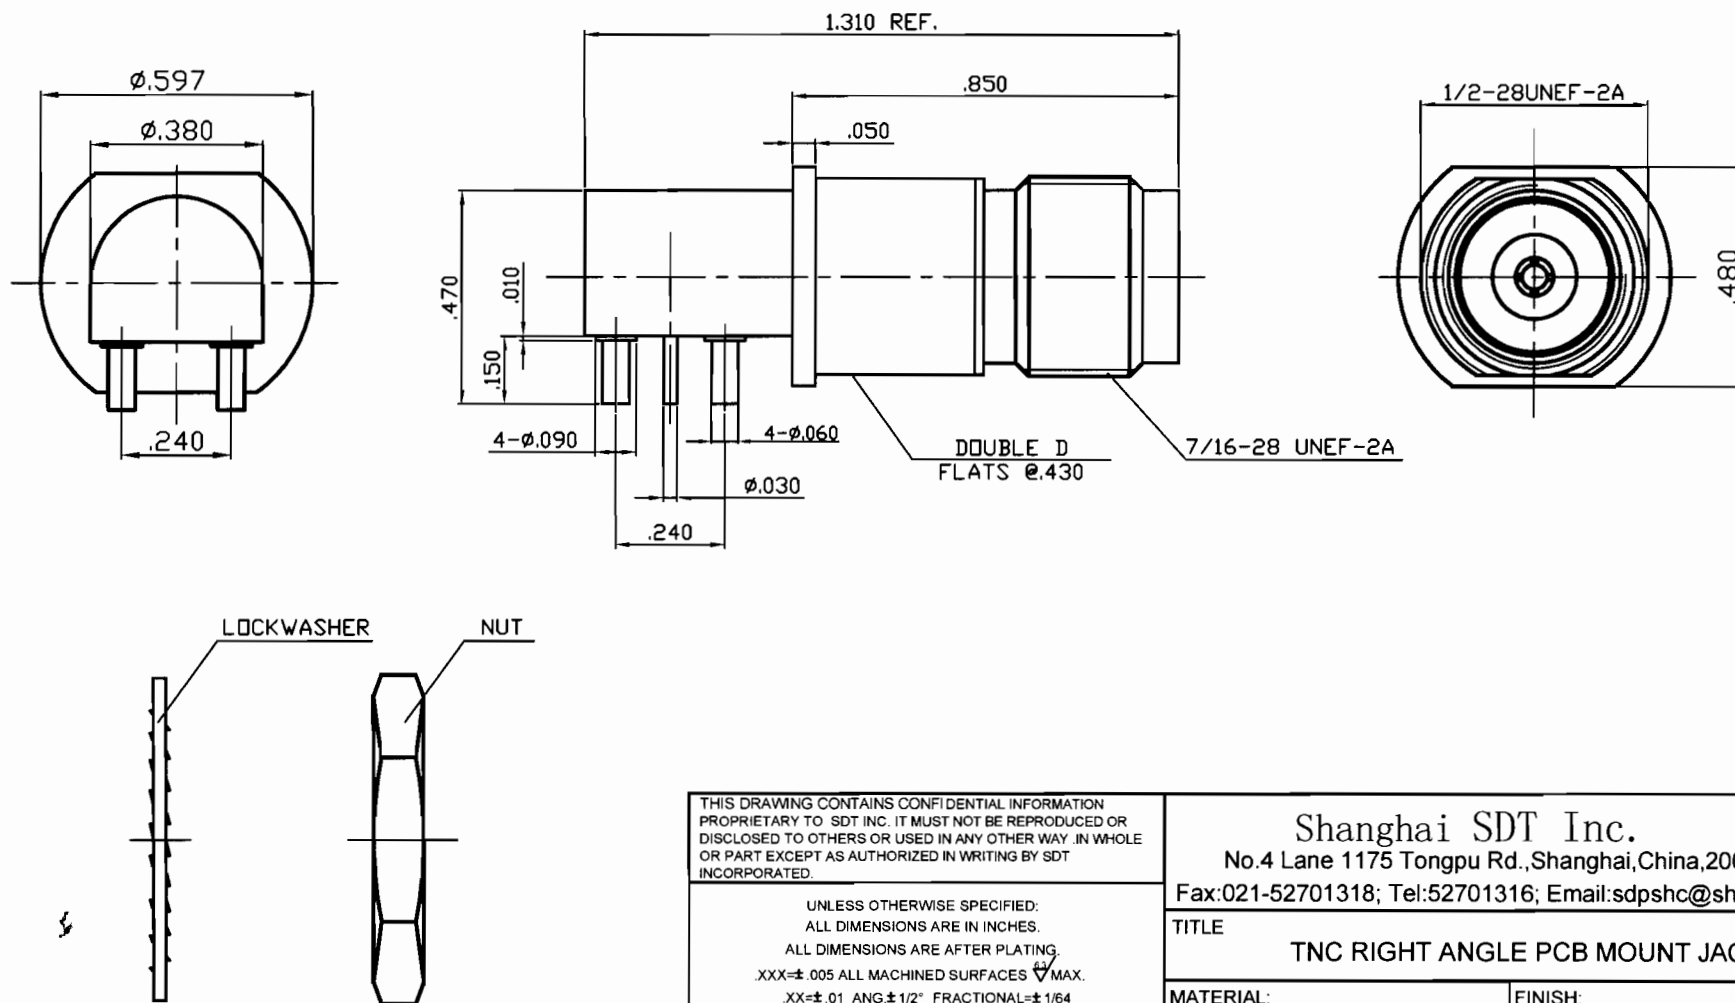

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION
 PROPRIETARY TO SDT INC. IT MUST NOT BE REPRODUCED OR
 DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY IN WHOLE
 OR PART EXCEPT AS AUTHORIZED IN WRITING BY SDT
 INCORPORATED.

UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS ARE IN INCHES.
 ALL DIMENSIONS ARE AFTER PLATING.
 .XXX=±.005 ALL MACHINED SURFACES \sqrt{R} MAX.
 .XX=±.01 ANG ± 1/2° FRACTIONAL=± 1/64



THIRD ANGLE PROJECTION

| | | |
|------|------|----------|
| DWN | ZAH | 04/12/07 |
| CHKD | ---- | ---- |
| APPR | ---- | ---- |

Shanghai SDT Inc.

No.4 Lane 1175 Tongpu Rd., Shanghai, China, 200333

Fax: 021-52701318; Tel: 52701316; Email: sdpshe@sh163.net

TITLE

TNC RIGHT ANGLE PCB MOUNT JACK

MATERIAL:

FINISH:

DO NOT SCALE
 DRAWING

DWG NO.

SDT 72309-3

REV.
 1