
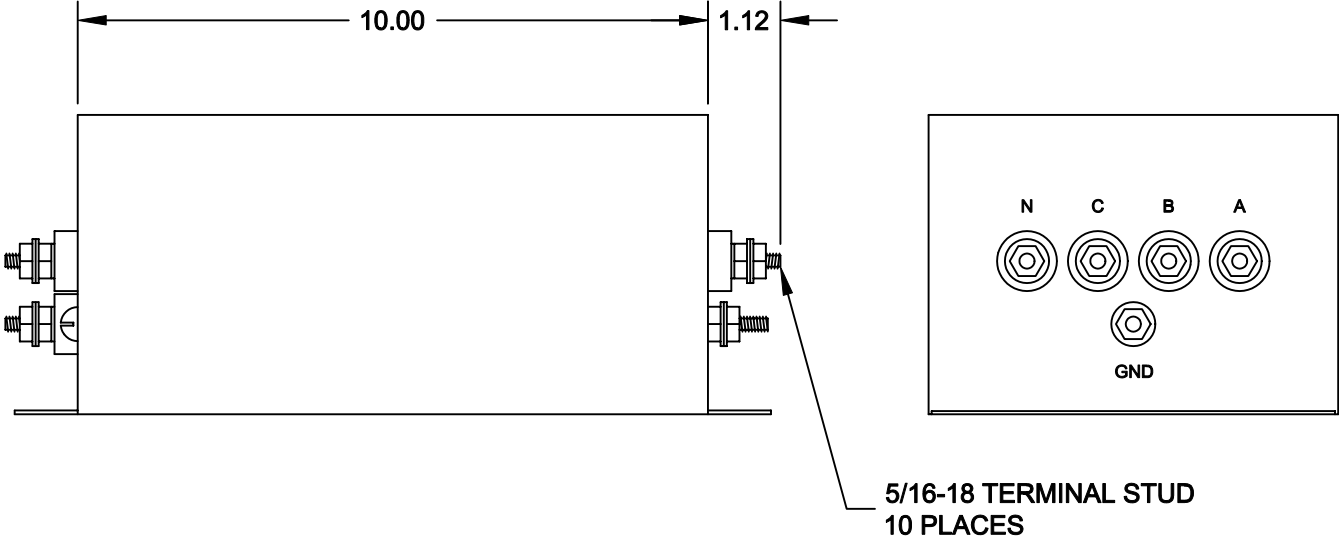
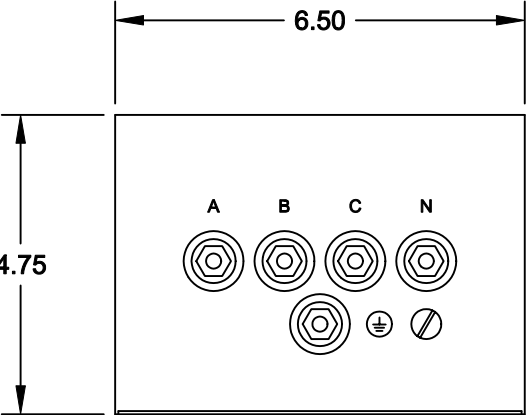



SPECIFICATIONS

- 1. CASE:
18 GA. (.048) CRS, TIN PLATED
- 2. RATED CURRENT:
3 x 80A
- 3. RATED VOLTAGE:
250/440VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO NEUTRAL: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.6mA @ 250VAC, 50Hz

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07-03-02	LE
B	REVISED MARKING	03-13-03	LE

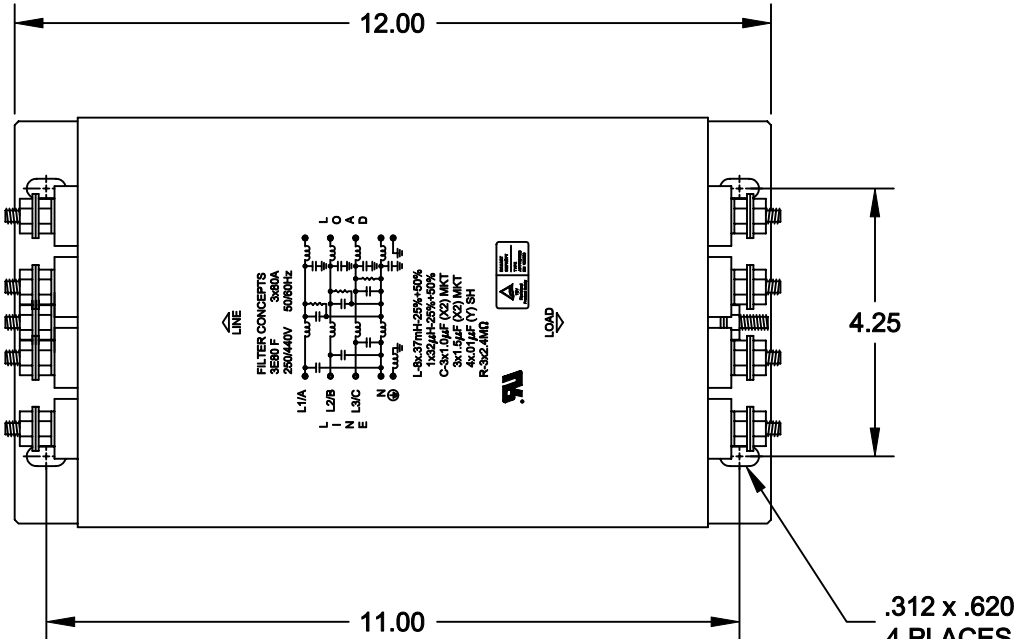

SCHEMATIC

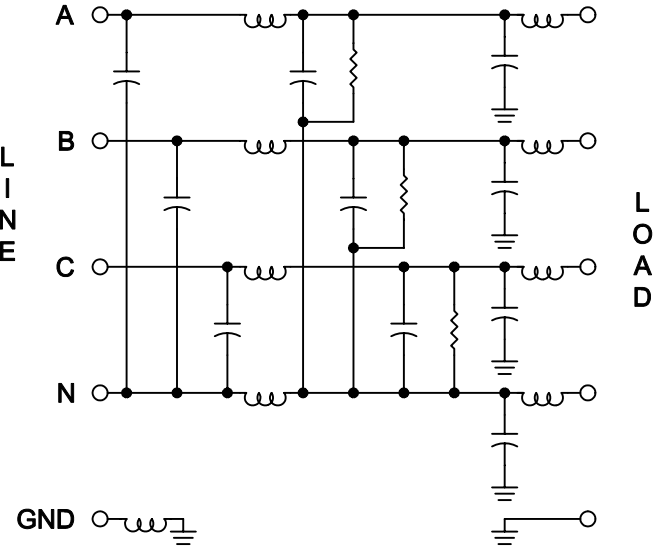

INSERTION LOSS (50 Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/N	20 db	30 db	55 db	50 db	35 db	50 db
L/G	1 db	30 db	60 db	60 db	60 db	50 db

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

CONTRACT NO.	
APPROVALS	DATE
DRAWN GIANG TRINH	07-03-02
CHECKED DANNIEL VUONG	07-03-02

FILTER CONCEPTS INC.

APPLICATION DRAWING
3E80 F FILTER

APPLICATION	
NEXT ASSY	USED ON

SIZE	CODE IDENT NO.	DRAWING NO.
B		7390
SCALE	1/3	SHEET 1 OF 1