


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

7703-6

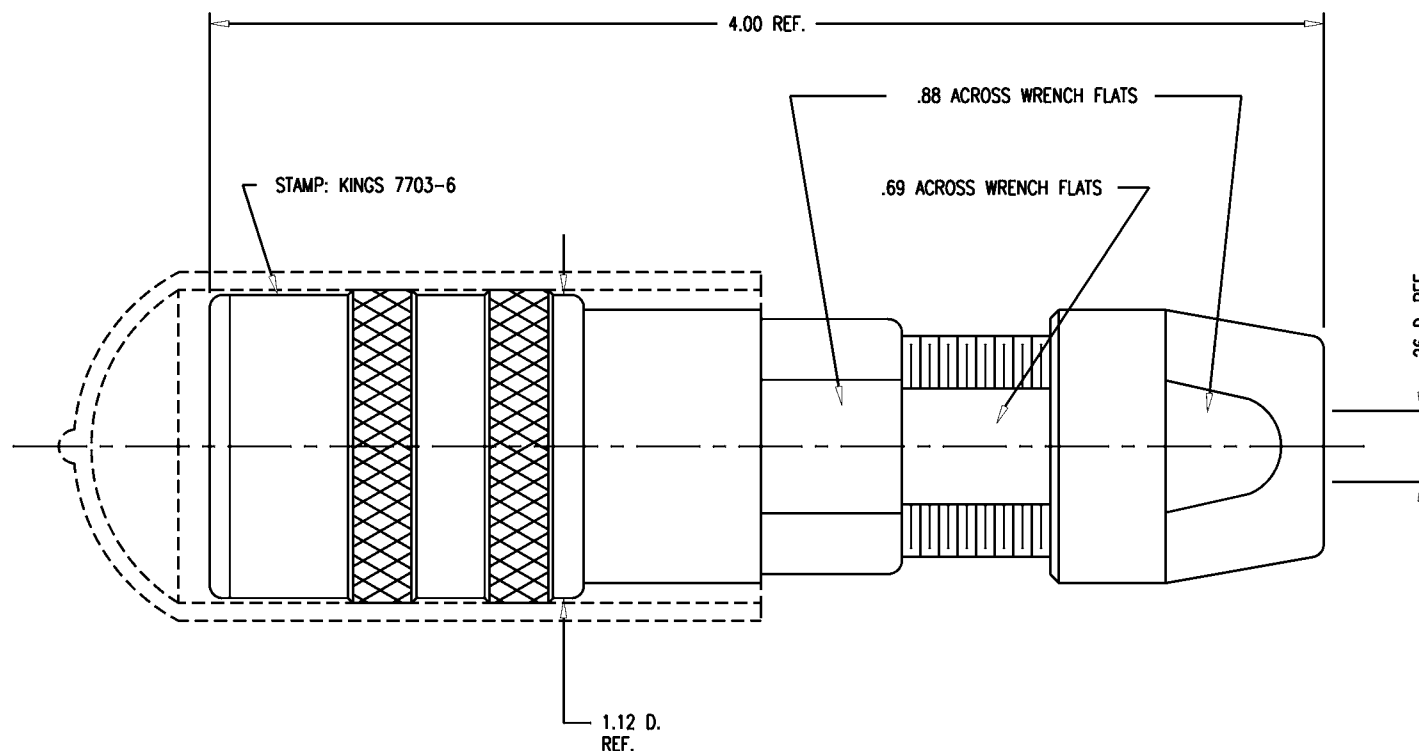

NOTES:

- FOR USE WITH BELDEN 88232 & COMM SCOPE 8000257 (780 CABLE GROUP).
- FOR CABLING INSTRUCTIONS SEE KAI-8010.
- FOR CRIMPING USE DIE SIZE KTH-2002.
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
GASKETS: SILICONE RUBBER, ZZ-R-765
CAP: VINYL
K-GRIP SLEEVE: COM'L BRONZE, ASTM-B-135
CENTER CONTACT
OUTER CONTACT SPRING } BER. COPPER, ASTM-B-196
INSERT
ALL OTHER METAL PARTS: BRASS, ASTM-B16

- FINISHES:
CENTER CONTACT } GOLD PLATE PER MIL-G-45204
OUTER CONTACT SPRING }
NUTS }
COLLET } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
BODIES }
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 ~W
FREQUENCY RANGE: DC-500 MHZ
VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
INNER GROUND/OUTER GROUND: 500 VRMS

REVISIONS

ISSUE	CHANGES
0	ER 37089 KH 08/08/96
1	CN 37238 D KH 02/03/97
2	CN 38024 E HVN 07/06/00

KAM6259

SCALE 2:1

APPROX SURFACE AREA

WAS: E-19092

USED ON

REF:

JACK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	12/01/95
DESIGN	FD	DATE	12/02/95
APPR.	FD	DATE	12/11/95

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

7703-6

GSD