
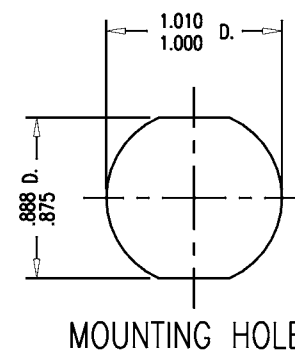


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

7704-7

REVISIONS		
ISSUE	CHANGES	
0	ER 36669 ME 11/01/95	
1	CN 37209 A KH 06/10/97	
2	CN 37786 D HVN 03/16/99	
3	CN 38120 C BDH 11/07/00	
4	CN 38137 C TML 01/05/01	
7704-7S		
SCALE 2:1		
APPROX SURFACE AREA		
USED ON		
REF: KP-8050-003-000		
RCPT, BKHD, TRI-LOC, SERIAL DIGITAL		
DRAWN	ME	DATE 11/01/95
DESIGN	FD	DATE 11/01/95
APPR.		DATE
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
7704-7		

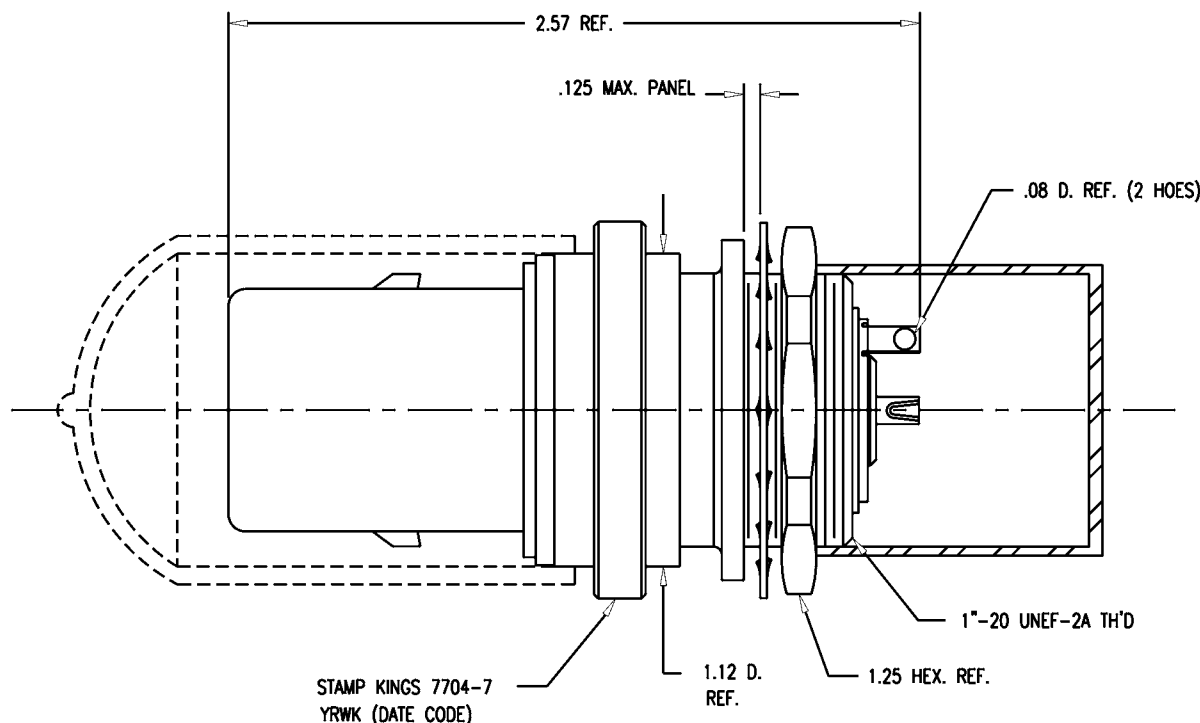

MOUNTING HOLE

GSD

- NOTES:
- MATERIALS:**
 CAPS: VINYL
 INSULATORS: TEFLON, ASTM-D-4894
 GASKETS: SILICONE RUBBER, ZZ-R-765
 CONDUCTIVE GASKET: CONSIL C 87-10004, 60-70 DUROMETER
 LOCKWASHER
 RETAINING RING } SPRING STEEL, PER ASTM A682
 E-RING
 OUTER CONTACT: PHOSPHOR BRONZE, ASTM-B-103
 BODY: BER. COPPER, ASTM-B-196
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
 - FINISHES:**
 CENTER CONTACTS: GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
 - ELECTRICAL CHARACTERISTICS:**
 FREQUENCY RANGE: DC-500 MHZ
 NOMINAL IMPEDANCE: 75 ~W
 VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VOLTS RMS
 INNER GROUND/OUTER GROUND: 500 VOLTS RMS