


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

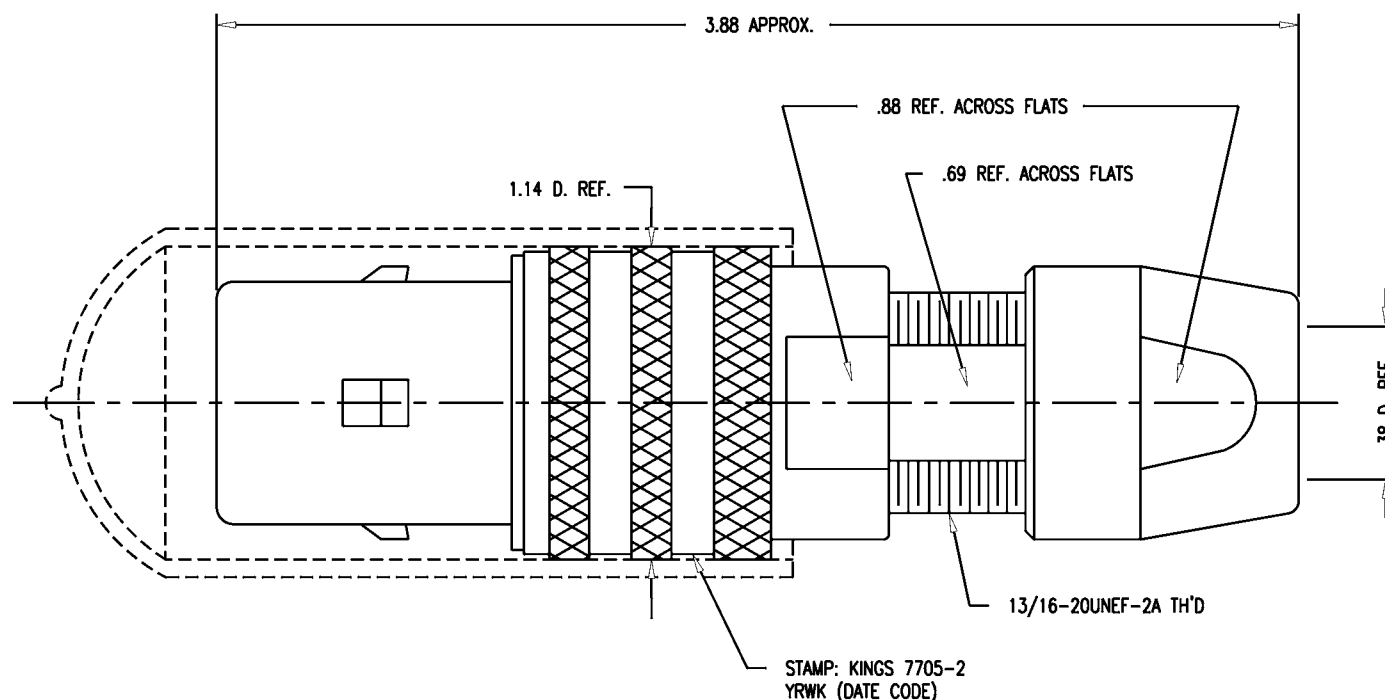

NOTES:

- FOR USE WITH 730 CABLE GROUP.
- FOR CABLING INSTRUCTIONS SEE KAI-8010.
- FOR CABLE TRIMMING USE KTJ-303 AND KTD-303.
- FOR CRIMPING USE DIE KTH-1000 AND KTH-2002.
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
CONDUCTIVE GASKET: CONSIL C 87-10004
GASKETS: SILICONE RUBBER, ZZ-R-765
K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B-135
OUTER CONTACT: PHOSPHOR BRONZE, ASTM-B-103
FINGER BODY: BER. COPPER, ASTM-B-196
CENTER CONTACT TIP: DELRIN
CAP: VINYL
ALL OTHER METAL PARTS: BRASS, ASTM-B16

- FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
NUT } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
COLLET }
OUTER BODIES }
ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-500 MHZ
VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
INNER GROUND/OUTER GROUND: 500 VRMS

7705-2

REVISIONS

ISSUE	CHANGES
0	ER 35415 KH 05/06/95
1	CN 37763 C HVN 01/19/99
2	CN 38123 C BDH 11/08/00

KAM5502

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8010-730-400

PLUG, TRI-LOC
(SERIAL DIGITAL)

DRAWN	KH	DATE	04/06/95
DESIGN	DW	DATE	04/07/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7705-2

GSD